



For high speed switching circuit.  
For small current rectification.

#### FEATURES

- Low Forward Voltage :  $V_F \text{ max}=0.55\text{V}$ .
- $I_O=200\text{mA}$  recification possible.

#### MAXIMUM RATING (Ta=25°C)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Repetitive Peak Reverse Voltage	$V_{RRM}$	30	V
Reverse Voltage	$V_R$	30	V
Average Forward Current	$I_O$	0.2	A
Non-repetitive peak surge current	$I_{FSM}$	1	A
Junction Temperature	$T_j$	125	°C
Storage Temperature	$T_{stg}$	-55 ~ 125	°C

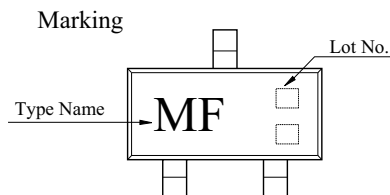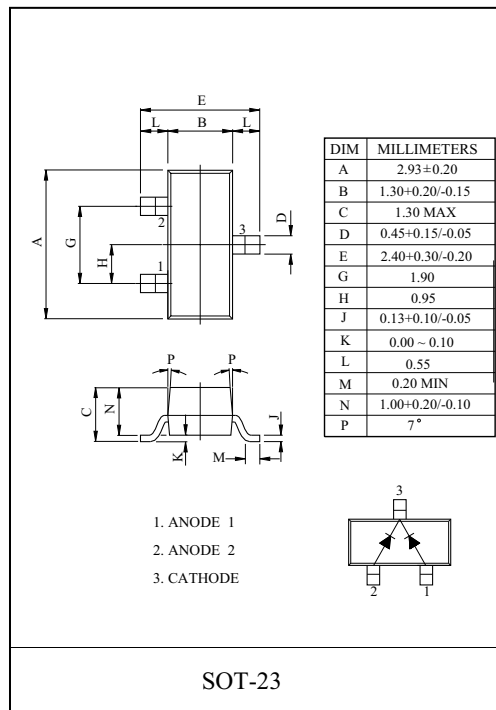

#### ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Voltage	$V_R$	$I_R=1\text{mA}$	30	-	-	V
Forward Voltage	$V_F$	$I_F=0.2\text{A}$	-	-	0.55	V
Reverse Current	$I_R$	$V_R=30\text{V}$	-	-	50	$\mu\text{A}$
Total Capacitance	$C_T$	$V_R=10\text{V}$ , $f=1\text{MHz}$	-	13	-	pF
Reverse Recovery Time	$t_{rr}$	$I_R=I_F=10\text{mA}$	-	3	-	nS

# KDR721S

