

Aluminum Capacitors Solid Al, Radial Pearl Miniature



Fig. 1

| QUICK REFERENCE DATA | |
|---|---|
| DESCRIPTION | VALUE |
| Maximum case sizes (H x W x T in mm) | 10 x 7 x 3.5 to 10 x 8 x 6 |
| Rated capacitance range (E6 series), C_R | 0.22 μ F to 68 μ F |
| Tolerance on C_R | $\pm 20\%$ |
| Rated voltage range, U_R | 6.3 V to 40 V |
| Category temperature range: $U_R = 6.3\text{ V to }40\text{ V}$ $U_C = 6.3\text{ V to }25\text{ V}$ | - 55 °C to + 85 °C - 55 °C to + 125 °C |
| Endurance test at 125 °C | 10 000 h |
| Useful life at 125 °C | 20 000 h |
| Useful life at 175 °C | 2000 h |
| Useful life at 40 °C, I_R applied | > 300 000 h |
| Shelf life at 0 V, 125 °C | 500 h |
| Based on sectional specification | IEC 60384-4/EN 130300 |
| Climatic category IEC 60068 | 55/125/56 |

FEATURES

- Polarized aluminum electrolytic capacitors, solid electrolyte MnO_2
- Radial leads, max. height 10 mm, resin dipped, orange colored
- Extremely long useful life, 20 000 h/125 °C
- Extended high temperature range up to 175 °C
- Excellent low temperature, impedance and ESR behaviour
- Charge and discharge proof, application with 0 Ω resistance allowed
- Reverse DC voltage up to 0.3 x U_R allowed
- AC voltage up to 0.8 x U_R allowed
- Compliant to RoHS Directive 2002/95/EC


RoHS
COMPLIANT

APPLICATIONS

- Audio-video, automotive, industrial high temperature and telecommunication
- Smoothing, filtering and buffering
- For small power supplies, DC/DC converters

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μ F)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for $\pm 20\%$)
- Rated voltage (in V) and category voltage if applicable
- Date code in accordance with IEC 60062
- Name of manufacturer
- “I” sign to indicate the negative terminal
- “+” sign to identify the positive terminal
- Series number

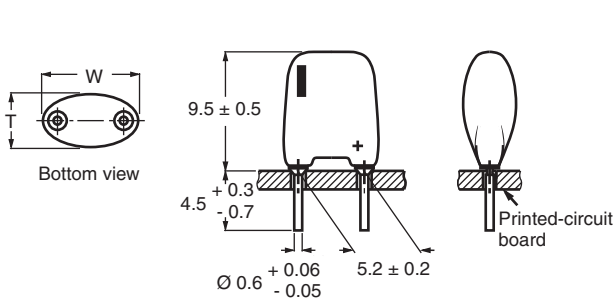
MOUNTING

When bending, cutting or straightening the leads, ensure that the capacitor body is relieved of stress.

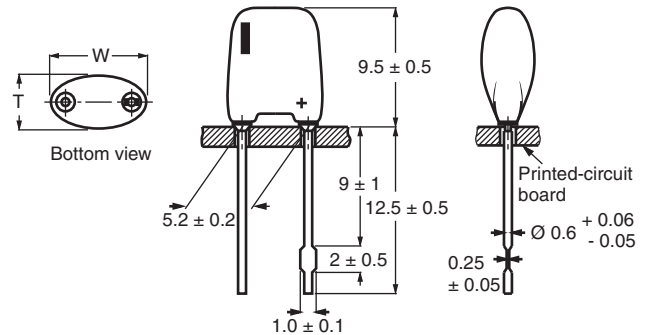
Bending after soldering must be avoided.

Completely sealing the component's body or use in an oxygen-free environment has a negative impact on useful life.

| SELECTION CHART FOR C_R, U_R, U_C, AND RELEVANT MAXIMUM CASE SIZES (H x W x T in mm) | | | | | |
|---|---|--------------|--------------|--------------|--------------|
| C _R (μF) | U _R (V) AT T _{amb} = 85 °C | | | | |
| | 6.3 | 10 | 16 | 25 | 40 |
| | U _C (V) AT T _{amb} = 125 °C | | | | |
| | 6.3 | 10 | 16 | 25 | 25 |
| 0.22 | - | - | - | - | 10 x 7 x 3.5 |
| 0.33 | - | - | - | - | 10 x 7 x 4 |
| 0.47 | - | - | - | - | 10 x 7 x 5 |
| 0.68 | - | - | - | 10 x 7 x 3.5 | 10 x 7 x 5 |
| 1.0 | - | - | - | 10 x 7 x 3.5 | 10 x 7 x 5 |
| 1.5 | - | - | - | 10 x 7 x 3.5 | 10 x 8 x 6 |
| 2.2 | - | - | 10 x 7 x 3.5 | 10 x 7 x 4 | 10 x 8 x 6 |
| 3.3 | - | - | 10 x 7 x 3.5 | 10 x 7 x 5 | - |
| 4.7 | - | 10 x 7 x 3.5 | 10 x 7 x 4 | 10 x 8 x 5 | - |
| 6.8 | - | 10 x 7 x 3.5 | 10 x 7 x 4 | 10 x 8 x 5 | - |
| 10 | 10 x 7 x 3.5 | 10 x 7 x 4 | 10 x 7 x 5 | 10 x 8 x 6 | - |
| 15 | - | 10 x 7 x 4 | 10 x 8 x 5 | - | - |
| 22 | 10 x 7 x 4 | 10 x 7 x 5 | 10 x 8 x 6 | - | - |
| 33 | 10 x 7 x 5 | 10 x 8 x 5 | - | - | - |
| 47 | 10 x 8 x 5 | 10 x 8 x 6 | - | - | - |
| 68 | 10 x 8 x 6 | - | - | - | - |

DIMENSIONS in millimeters AND AVAILABLE FORMS


The diameter of the mounting holes in the printed-circuit board is 0.8 ± 0.1 mm.
Flanges are provided with degassing grooves.

 Fig. 2 - **Form CB:** Short leads, in boxes


The diameter of the mounting holes in the printed-circuit board is 0.8 ± 0.1 mm, except for the hole of the anode lead of Form CA capacitors: $1.3 - 0.2$ mm.
Flanges are provided with degassing grooves.


 Fig. 3 - **Form CA:** Long leads with keyed polarity, in boxes

Table 1

| DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES | | | | | | |
|---|-----------|----------|------------------------|------------------------|----------|----------|
| MAXIMUM CASE SIZE H x W x T (mm) | CASE CODE | MASS (g) | PACKAGING QUANTITIES | | | |
| | | | FORM CA ⁽¹⁾ | FORM CB ⁽¹⁾ | FORM TR+ | FORM TFA |
| 10 x 7 x 3.5 | 20 | ≈ 0.25 | 1000 | 1000 | 2000 | 1000 |
| 10 x 7 x 4 | 30 | ≈ 0.30 | 1000 | 1000 | 2000 | 1000 |
| 10 x 7 x 5 | 40 | ≈ 0.35 | 1000 | 1000 | 1000 | 1000 |
| 10 x 8 x 5 | 50 | ≈ 0.50 | 1000 | 1000 | 1000 | 1000 |
| 10 x 8 x 6 | 60 | ≈ 0.60 | 1000 | 1000 | 1000 | 1000 |

Notes

- ⁽¹⁾ In plastic bags of 200 units each
- Detailed tape dimensions see section "PACKAGING"

TAPED PRODUCTS


Form TR+: Taped on reel, positive leading
Form TFA: Taped in ammpack

Fig. 4 - Taped versions

ELECTRICAL DATA

| SYMBOL | DESCRIPTION |
|---------------|---|
| C_R | Rated capacitance at 100 Hz, tolerance $\pm 20\%$ |
| I_R | Max. RMS ripple current no necessary DC applied |
| I_{L5} | Max. leakage current after 5 min at U_R |
| $\tan \delta$ | Max. dissipation factor at 100 Hz |
| ESR | Max./typ. equivalent series resistance at 100 Hz |
| Z | Max. impedance at 100 kHz |

Note

- Unless otherwise specified, all electrical values in Table 2 apply at $T_{amb} = 20^\circ\text{C}$ to 25°C , $P = 86\text{ kPa}$ to 106 kPa , $RH = 45\%$ to 75% .

ORDERING EXAMPLE

Maximum case size: 10 mm x 7 mm x 5 mm; Form CB

 Electrolytic capacitors 128 series 10 $\mu\text{F}/16\text{ V}$; $\pm 20\%$

Ordering code: MAL2 128 55109 E3

Former 12NC: 2281 128 55109

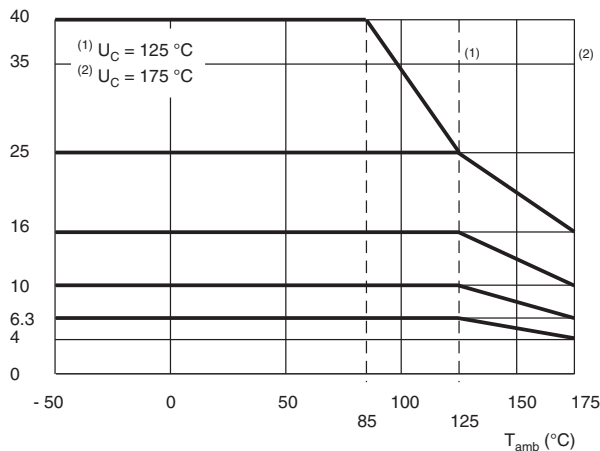
Table 2

| ELECTRICAL DATA AND ORDERING INFORMATION | | | | | | | | | | | | | | |
|--|--------------|--------------------------------------|---|-----------------------------------|----------------------------------|-----------------------------------|--|---------------------------------------|---------------------------------------|------------------------------|-------------------------------|------------|------------------|------------------|
| U_C (V) | U_R (V) | C_R 100 Hz (μF) | MAXIMUM CASE SIZE H x W x T (mm) | I_R 100 Hz 125 °C (mA) | I_R 10 kHz 85 °C (mA) | I_R 100 kHz 40 °C (mA) | I_{L5} 5 min (μA) | MAX. ESR 100 Hz (Ω) | TYP. ESR 100 Hz (Ω) | Z 100 kHz (Ω) | ORDERING CODE MAL2128..... | | | |
| | | | | | | | | | | | FORM CB | FORM CA | FORM TR+ REEL | FORM TFA AMMO |
| 6.3 | 6.3 | 10 | 10 x 7 x 3.5 | 22.4 | 320 | 595 | 2 | 20 | 8 | 2.0 | 53109E3 | 73109E3 | 23109E3 | 33109E3 |
| | | 22 | 10 x 7 x 4 | 32.9 | 470 | 870 | 4 | 9 | 3.5 | 1.0 | 53229E3 | 73229E3 | 23229E3 | 33229E3 |
| | | 33 | 10 x 7 x 5 | 65.4 | 595 | 1100 | 5 | 6.1 | 2 | 0.70 | 53339E3 | 73339E3 | 23339E3 | 33339E3 |
| | | 47 | 10 x 8 x 5 | 118.4 | 740 | 1360 | 7 | 4.3 | 2 | 0.50 | 53479E3 | 73479E3 | 23479E3 | 33479E3 |
| | | 68 | 10 x 8 x 6 | 153.0 | 800 | 1650 | 11 | 3.0 | 1.5 | 0.40 | 53689E3 | 73689E3 | 23689E3 | 33689E3 |
| 10 | 10 | 4.7 | 10 x 7 x 3.5 | 16.1 | 230 | 425 | 2 | 43 | 16 | 3.00 | 54478E3 | 74478E3 | 24478E3 | 34478E3 |
| | | 6.8 | 10 x 7 x 3.5 | 18.9 | 270 | 500 | 2 | 30 | 12 | 2.20 | 54688E3 | 74688E3 | 24688E3 | 34688E3 |
| | | 10 | 10 x 7 x 4 | 21.7 | 310 | 573 | 3 | 20 | 9 | 1.70 | 54109E3 | 74109E3 | 24109E3 | 34109E3 |
| | | 15 | 10 x 7 x 4 | 27.3 | 390 | 720 | 4 | 14 | 7 | 1.20 | 54159E3 | 74159E3 | 24159E3 | 34159E3 |
| | | 22 | 10 x 7 x 5 | 51.7 | 470 | 870 | 6 | 9 | 3.5 | 0.90 | 54229E3 | 74229E3 | 24229E3 | 34229E3 |
| | | 33 | 10 x 8 x 5 | 81.6 | 510 | 940 | 8 | 6.1 | 2 | 0.60 | 54339E3 | 74339E3 | 24339E3 | 34339E3 |
| 16 | 16 | 4.7 | 10 x 8 x 6 | 105.4 | 620 | 1140 | 12 | 4.3 | 1.5 | 0.40 | 54479E3 | 74479E3 | 24479E3 | 34479E3 |
| | | 2.2 | 10 x 7 x 3.5 | 14.0 | 200 | 370 | 2 | 91 | 25 | 4.50 | 55228E3 | 75228E3 | 25228E3 | 35228E3 |
| | | 3.3 | 10 x 7 x 3.5 | 16.1 | 230 | 425 | 2 | 61 | 26 | 3.30 | 55338E3 | 75338E3 | 25338E3 | 35338E3 |
| | | 4.7 | 10 x 7 x 4 | 18.9 | 270 | 500 | 2 | 43 | 14 | 2.30 | 55478E3 | 75478E3 | 25478E3 | 35478E3 |
| | | 6.8 | 10 x 7 x 4 | 22.4 | 320 | 590 | 3 | 30 | 11 | 1.65 | 55688E3 | 75688E3 | 25688E3 | 35688E3 |
| | | 10 | 10 x 7 x 5 | 42.9 | 390 | 720 | 4 | 20 | 6 | 1.10 | 55109E3 | 75109E3 | 25109E3 | 35109E3 |
| 25 | 25 | 15 | 10 x 8 x 5 | 71.2 | 445 | 820 | 6 | 14 | 5 | 0.85 | 55159E3 | 75159E3 | 25159E3 | 35159E3 |
| | | 22 | 10 x 8 x 6 | 86.7 | 510 | 940 | 9 | 9 | 3.5 | 0.65 | 55229E3 | 75229E3 | 25229E3 | 35229E3 |
| | | 0.68 | 10 x 7 x 3.5 | 7.7 | 110 | 200 | 2 | 295 | 85 | 17.00 | 56687E3 | 76687E3 | 26687E3 | 36687E3 |
| | | 1.0 | 10 x 7 x 3.5 | 9.1 | 130 | 240 | 2 | 200 | 71 | 12.50 | 56108E3 | 76108E3 | 26108E3 | 36108E3 |
| | | 1.5 | 10 x 7 x 3.5 | 10.8 | 155 | 285 | 2 | 135 | 48 | 10.00 | 56158E3 | 76158E3 | 26158E3 | 36158E3 |
| | | 2.2 | 10 x 7 x 4 | 13.6 | 195 | 360 | 2 | 91 | 34 | 7.00 | 56228E3 | 76228E3 | 26228E3 | 36228E3 |
| 25 | 40 | 3.3 | 10 x 7 x 5 | 16.1 | 230 | 425 | 2 | 61 | 19 | 5.20 | 56338E3 | 76338E3 | 26338E3 | 36338E3 |
| | | 4.7 | 10 x 8 x 5 | 25.3 | 270 | 500 | 3 | 43 | 14 | 3.50 | 56478E3 | 76478E3 | 26478E3 | 36478E3 |
| | | 6.8 | 10 x 8 x 6 | 52.7 | 310 | 570 | 4 | 30 | 11 | 2.70 | 56688E3 | 76688E3 | 26688E3 | 36688E3 |
| | | 10 | 10 x 8 x 6 | 64.8 | 360 | 660 | 6 | 20 | 9 | 2.00 | 56109E3 | 76109E3 | 26109E3 | 36109E3 |
| | | 0.22 | 10 x 7 x 3.5 | 4.2 | 60 | 115 | 2 | 910 | 275 | 27.00 | 57227E3 | 77227E3 | 27227E3 | 37227E3 |
| | | 0.33 | 10 x 7 x 4 | 5.3 | 75 | 140 | 2 | 610 | 172 | 20.00 | 57337E3 | 77337E3 | 27337E3 | 37337E3 |
| 25 | 40 | 0.47 | 10 x 7 x 5 | 10.4 | 95 | 175 | 2 | 430 | 114 | 15.00 | 57477E3 | 77477E3 | 27477E3 | 37477E3 |
| | | 0.68 | 10 x 7 x 5 | 12.1 | 110 | 205 | 2 | 295 | 89 | 10.00 | 57687E3 | 77687E3 | 27687E3 | 37687E3 |
| | | 1.0 | 10 x 8 x 5 | 20.0 | 125 | 230 | 2 | 200 | 45 | 7.00 | 57108E3 | 77108E3 | 27108E3 | 37108E3 |
| | | 1.5 | 10 x 8 x 6 | 25.5 | 150 | 280 | 2 | 135 | 35 | 5.50 | 57158E3 | 77158E3 | 27158E3 | 37158E3 |
| | | 2.2 | 10 x 8 x 6 | 33.1 | 195 | 360 | 2 | 91 | 28 | 4.20 | 57228E3 | 77228E3 | 27228E3 | 37228E3 |

Note

- $\tan \delta$ at 100 Hz for all types < 0.10

| ADDITIONAL ELECTRICAL DATA | | |
|--|---|---|
| PARAMETER | CONDITIONS | VALUE |
| Voltage | | |
| Surge voltage | | $U_s \leq 1.15 \times U_R$ |
| Reverse voltage | | $U_{rev} < 0.3 \times U_R$ |
| Maximum peak AC voltage | Reverse voltage applied | $\leq 2 \text{ V}$ |
| Maximum peak AC voltage, without reverse voltage applied | $T_{amb} \leq 85 \text{ }^\circ\text{C}$: at $f \leq 0.1 \text{ Hz}$ at $0.1 \text{ Hz} < f \leq 1 \text{ Hz}$ at $1 \text{ Hz} < f \leq 10 \text{ Hz}$ at $10 \text{ Hz} < f \leq 50 \text{ Hz}$ at $f > 50 \text{ Hz}$ | $0.30 \times U_R$ $0.45 \times U_R$ $0.60 \times U_R$ $0.65 \times U_R$ $0.80 \times U_R$ |
| | $85 \text{ }^\circ\text{C} < T_{amb} \leq 125 \text{ }^\circ\text{C}$: at $f \leq 0.1 \text{ Hz}$ at $0.1 \text{ Hz} < f \leq 1 \text{ Hz}$ at $1 \text{ Hz} < f \leq 10 \text{ Hz}$ at $10 \text{ Hz} < f \leq 50 \text{ Hz}$ at $f > 50 \text{ Hz}$ | $0.15 \times U_R$ $0.22 \times U_R$ $0.30 \times U_R$ $0.32 \times U_R$ $0.40 \times U_R$ |
| Inductance | | |
| Equivalent series inductance (ESL) | Case sizes 10 mm x 7 mm x 3.5 mm to 10 mm x 7 mm x 5 mm | typ. 9 nH to 14 nH |
| | Case sizes 10 mm x 8 mm x 5 mm and 10 mm x 8 mm x 6 mm | typ. 11 nH to 16 nH |
| | All case sizes | max. 20 nH |
| Dissipation | | |
| Maximum power dissipation | Case sizes 10 mm x 7 mm x 3.5 mm to 10 mm x 7 mm x 5 mm | $P_{125} = 88 \text{ mW}$ |
| | Case sizes 10 mm x 8 mm x 5 mm and 10 mm x 8 mm x 6 mm | $P_{125} = 104 \text{ mW}$ |
| Current | | |
| Maximum leakage current | After 5 min at U_R and $T_{amb} = 25 \text{ }^\circ\text{C}$ | $I_{L5} \leq 0.025 C_R \times U_R$ or $2 \text{ } \mu\text{A}$ whichever is greater; see Table 2 |
| Typical leakage current | 15 s at U_R and $T_{amb} = 25 \text{ }^\circ\text{C}$: $U_R = 6.3 \text{ V to } 16 \text{ V}$ | $\approx 0.2 \times$ value stated in Table 2 |
| | $U_R = 25 \text{ V to } 40 \text{ V}$ | $\approx 0.1 \times$ value stated in Table 2 |

VOLTAGE

 Fig. 5 - Maximum permissible voltage up to $T_{amb} = 175 \text{ }^\circ\text{C}$
RIPPLE CURRENT (I_R)

| PARAMETER | T_{amb} | | | | | |
|------------------|-----------|-------|-------|-------|--------|--------|
| | 25 °C | 40 °C | 65 °C | 85 °C | 105 °C | 125 °C |
| I_R multiplier | 1.1 | 1.0 | 0.88 | 0.75 | 0.59 | 0.37 |

Notes

- (1) Applying the maximum RMS ripple current given in Table 2 will cause a device temperature of $138 \text{ }^\circ\text{C}$
- (2) The 100 kHz values in Table 2 for other temperatures are to be calculated with the above I_R multipliers

CAPACITANCE (C)

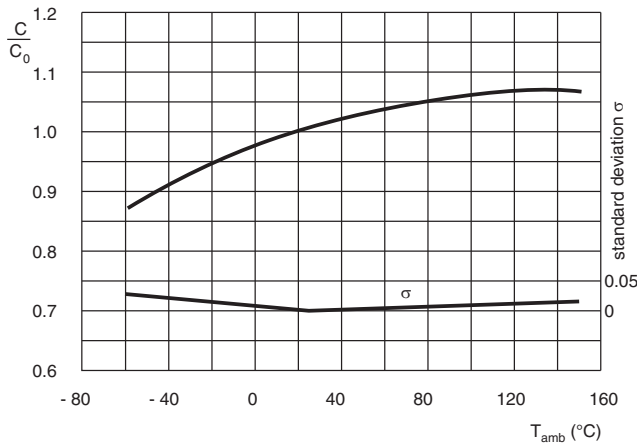


Fig. 6 - Typical multiplier of capacitance and standard deviation as functions of ambient temperature

TYPICAL CAPACITANCE CHANGE AFTER ENDURANCE TEST AT $T_{amb} = 125$ °C

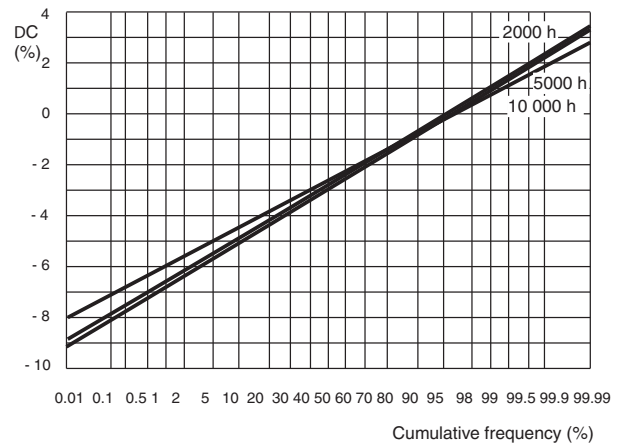
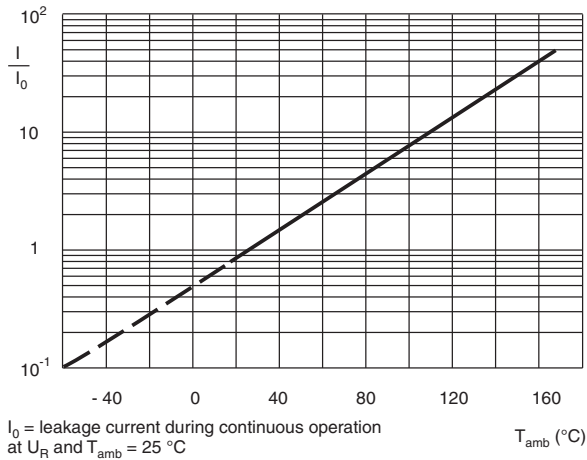


Fig. 7 - Change of capacitance as a function of cumulative frequency after endurance test

LEAKAGE CURRENT



I_0 = leakage current during continuous operation at U_R and $T_{amb} = 25$ °C

Fig. 8 - Typical multiplier of leakage current as a function of ambient temperature

TYPICAL LEAKAGE CURRENT CHANGE AFTER ENDURANCE TEST AT $T_{amb} = 125$ °C

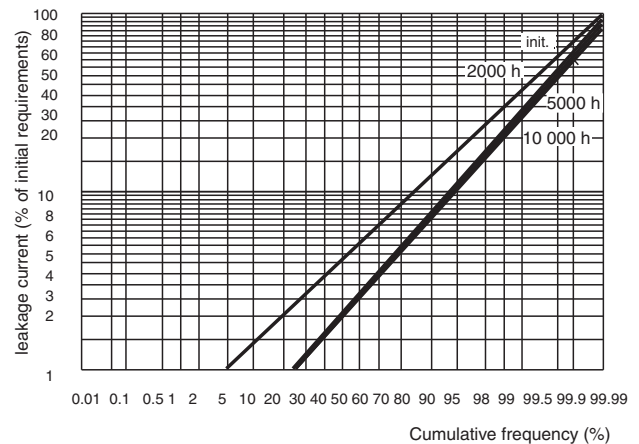


Fig. 9 - Change of capacitance as a function of cumulative frequency after endurance test

DISSIPATION FACTOR (tan δ)

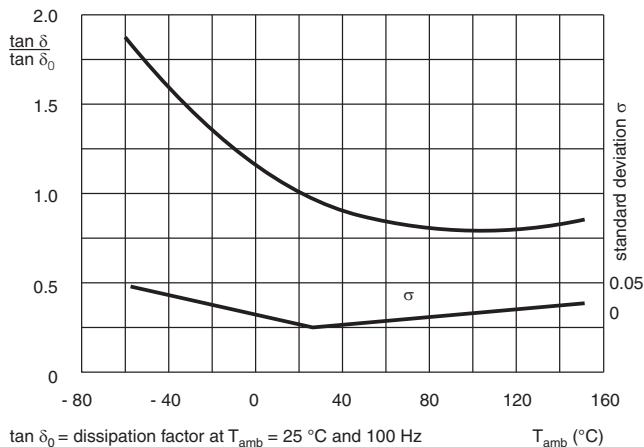


Fig. 10 - Typical multiplier of dissipation factor and standard deviation as functions of ambient temperature

TYPICAL tan δ CHANGE AFTER ENDURANCE TEST AT $T_{amb} = 125^\circ\text{C}$

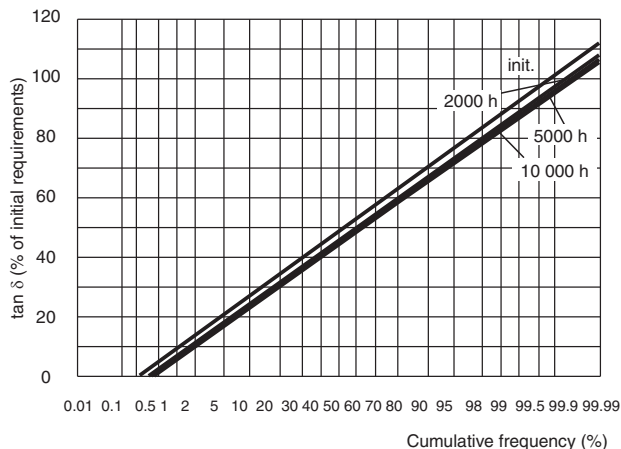


Fig. 11 - tan δ change of capacitance as a function of cumulative frequency after endurance test

EQUIVALENT SERIES RESISTANCE (ESR)

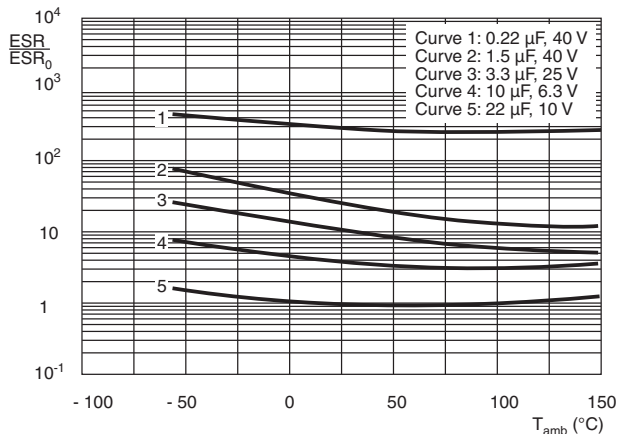


Fig. 12 - Typical multiplier of ESR at 100 Hz as a function of ambient temperature

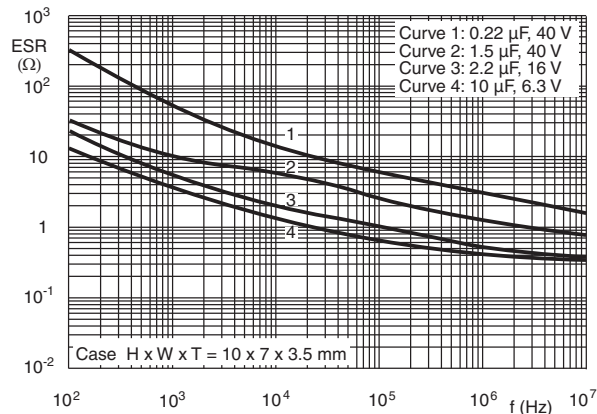


Fig. 13 - Typical ESR at 25 °C as a function of frequency

EQUIVALENT SERIES RESISTANCE (ESR)

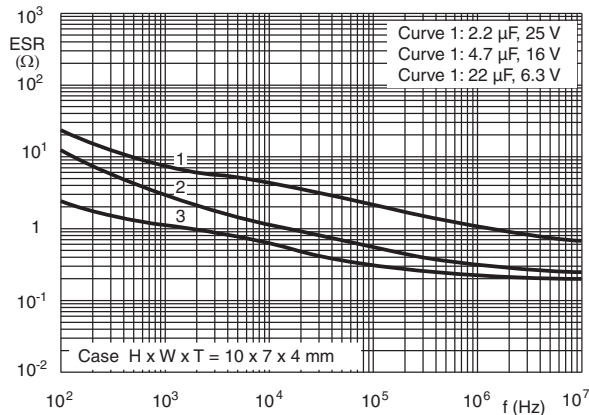


Fig. 14 - Typical ESR at 25 °C as a function of frequency

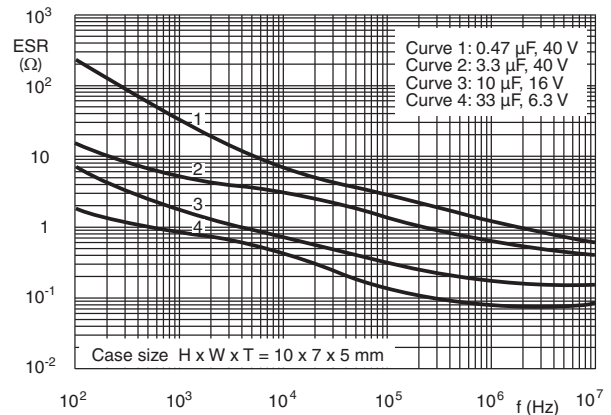


Fig. 15 - Typical ESR at 25 °C as a function of frequency

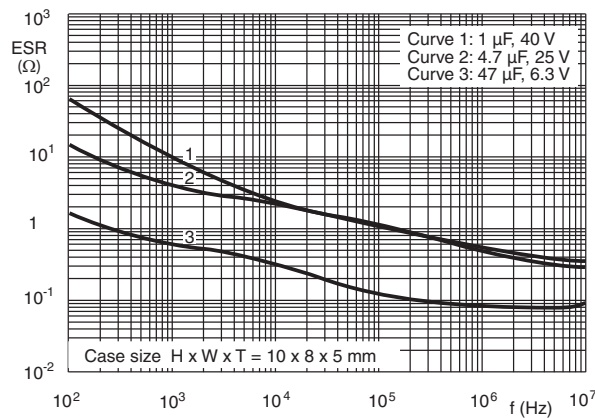


Fig. 16 - Typical ESR as a function of frequency

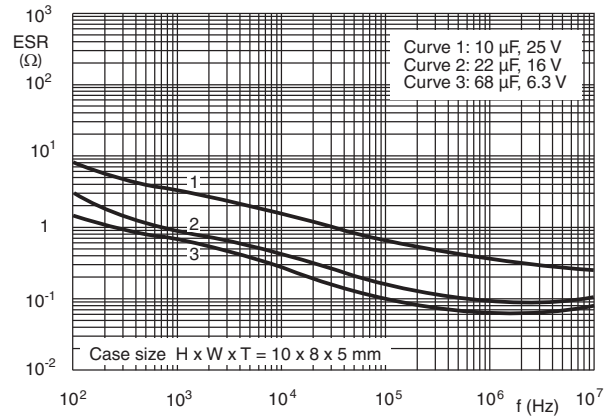


Fig. 17 - Typical ESR at 25 °C as a function of frequency

IMPEDANCE (Z)

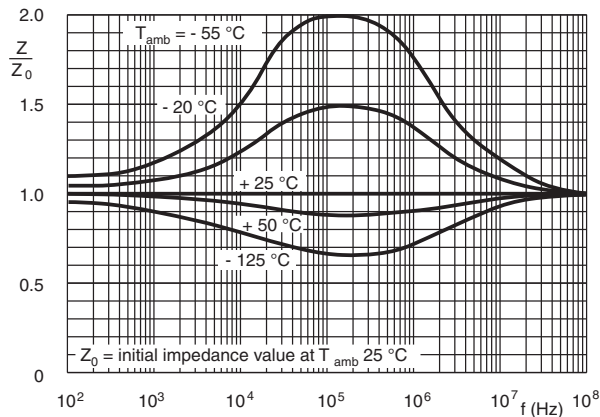


Fig. 18 - Typical multiplier of impedance as a function of frequency at different ambient temperatures

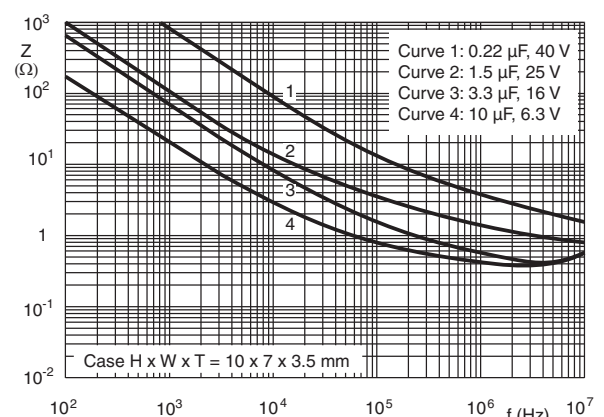


Fig. 19 - Typical impedance at 25 °C as a function of frequency

IMPEDANCE (Z)

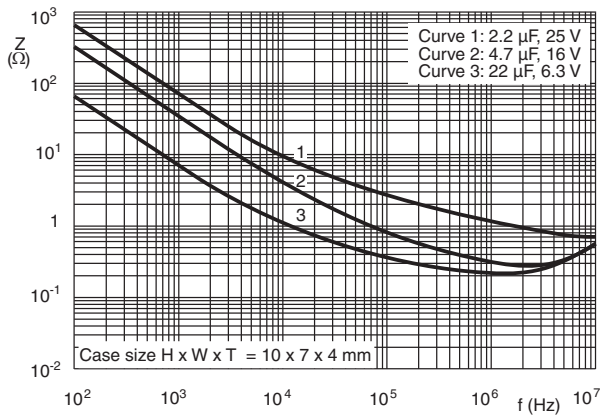


Fig. 20 - Typical impedance at 25 °C as a function of frequency

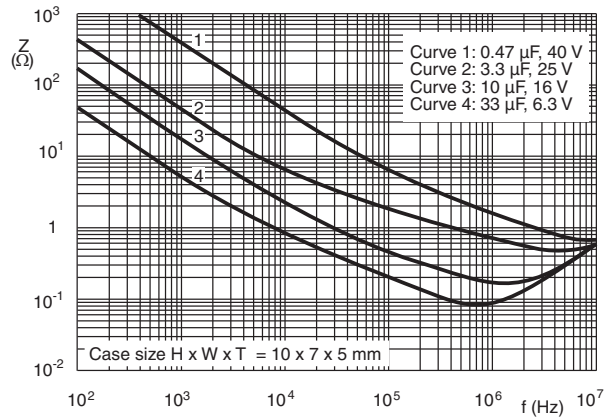


Fig. 21 - Typical impedance at 25 °C as a function of frequency

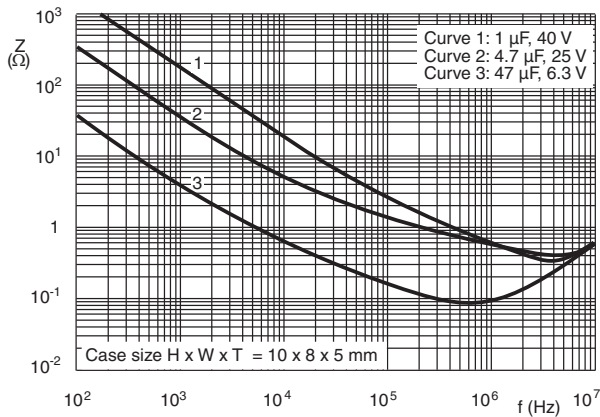


Fig. 22 - Typical impedance at 25 °C as a function of frequency

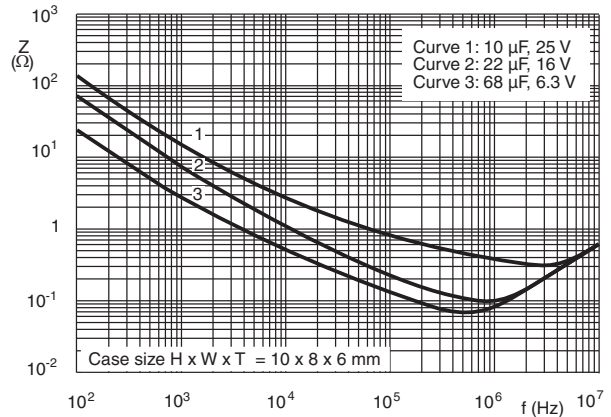


Fig. 23 - Typical impedance at 25 °C as a function of frequency

Table 3

| TEST PROCEDURES AND REQUIREMENTS | | | |
|--|--|---|--|
| TEST | | PROCEDURE (quick reference) | REQUIREMENTS |
| NAME OF TEST | REFERENCE | | |
| Endurance | IEC 60384-4/ EN130300 subclause 4.13 | $T_{amb} = 125\text{ }^{\circ}\text{C}$; $U_R = 6.3\text{ V}$ to 25 V with U_R applied; $U_R = 40\text{ V}$ with U_C applied; 10 000 h | $\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ |
| Useful life | CECC 30302 subclause 1.8.1 | $T_{amb} = 125\text{ }^{\circ}\text{C}$; I_R applied and: $U_R = 6.3\text{ V}$ to 25 V with U_R applied; $U_R = 40\text{ V}$ with U_C applied; 20 000 h | $\Delta C/C: \pm 15\%$ $\tan \delta \leq 1.5 \times \text{spec. limit}$ $Z \leq 1.5 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $< 1\%$ |
| Shelf life (storage at high temperature) | IEC 60384-4/ EN130300 subclause 4.17 | $T_{amb} = 125\text{ }^{\circ}\text{C}$; no voltage applied; 500 h | $\Delta C/C: \pm 10\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ |
| Charge and discharge | IEC 60384-4-2 subclause 9.21 | 10^6 cycles without series resistance: 0.5 s to U_R ; 0.5 s to ground | $\Delta C/C: \pm 5\%$ no short or open circuit, no visible damage |
| Solvent resistance | IEC 60068-2-45, test XA IEC 60653 | Immersion: 5 min \pm 0.5 min with or without ultrasonic at $55\text{ }^{\circ}\text{C} \pm 5\text{ }^{\circ}\text{C}$ Solvents: demineralized water and/or calgonite solution (20 g/l) | Visual appearance not affected |
| Extended vibration | IEC 60068-2-6 test Fc | 10 Hz to 2000 Hz; 1.5 mm or 20 g; 1 octave/min; 3 directions; 1 sweep per direction; no voltage applied | no intermittent contacts no breakdown no open circuiting no mechanical damage $\Delta C/C: \pm 5\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1.5 \times \text{spec. limit}$ |
| Shock | IEC 60068-2-27 test Ea | Half-sine or sawtooth pulse shape; 50 g; 11 ms; 3 successive shocks in each direction of 3 mutually perpendicular axes; no voltage applied | no intermittent contacts no breakdown no open circuiting no mechanical damage $\Delta C/C: \pm 5\%$ $\tan \delta \leq 1.2 \times \text{spec. limit}$ $Z \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 1.5 \times \text{spec. limit}$ |
| Passive flammability | IEC 60695-2-2 | Capacitor mounted to a vertical printed-circuit board, one flame on capacitor body; $T_{amb} = 20\text{ }^{\circ}\text{C}$ to $25\text{ }^{\circ}\text{C}$; test duration = 20 s | After removing the test flame from the capacitor, the capacitor must not continue to burn for more than 15 s; no burning particles must drop from the sample |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.