

Aluminum Capacitors Power Economic Printed Wiring





Fig.1 Component outlines



| QUICK REFERENCE DATA | | |
|---|----------------------|------------------|
| DESCRIPTION | VALUE | |
| | 051 | 053 |
| Nominal case size (Ø D x L in mm) | 25 x 30 to 40 x 100 | |
| Rated capacitance range (E6 series), C _R | 680 µF to 150 000 µF | 68 µF to 2200 µF |
| Tolerance on C _R | ± 20 % | |
| Rated voltage range, U _R | 10 V to 100 V | 200 V to 400 V |
| Category temperature range | - 40 °C to + 85 °C | |
| Endurance test at 85 °C | 5000 h | |
| Useful life at 85 °C | 12 000 h | |
| Useful life at 40 °C, 1.4 x I _R applied | 200 000 h | |
| Shelf life at 0 V, 85 °C | 500 h | |
| Based on sectional specification | IEC 60384-4/EN130300 | |
| Climatic category IEC 60068 | 40/085/56 | |

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Large types with reduced dimensions, cylindrical aluminum case, insulated with a blue sleeve
- Provided with keyed polarity
- Long useful life: 12 000 h at 85 °C
- High ripple current capability
- High resistance to shock and vibration
- Compliant to RoHS Directive 2002/95/EC



RoHS
COMPLIANT

APPLICATIONS

- General purpose, industrial, medical and audio/video systems
- Standard and switched mode power supplies
- Energy storage in pulse systems

MARKING


The capacitors are marked (where possible) with the following information:

- Rated capacitance (in µF)
- Tolerance on rated capacitance, code letter in accordance with IEC 60062 (M for ± 20 %)
- Rated voltage (in V)
- Date code (YYMM)
- Name of manufacturer
- Code for factory of origin
- Polarity of the terminals and ‘-’ sign to indicate the negative terminal, visible from the top and/or side of the capacitor
- Code number
- Climatic category in accordance with IEC 60068

| SELECTION CHART FOR C _R , U _R AND RELEVANT NOMINAL CASE SIZES (Ø D x L in mm) | | | | | | | | | |
|---|--------------------|----|----|----|---------|---------|----------|----------|----------|
| C _R (µF) | U _R (V) | | | | | | | | |
| | 10 | 16 | 25 | 40 | 63 | 100 | 200 | 385 | 400 |
| 68 | - | - | - | - | - | - | - | 25 x 30 | 25 x 30 |
| 100 | - | - | - | - | - | - | - | 25 x 40 | 25 x 40 |
| 150 | - | - | - | - | - | - | 25 x 30 | 30 x 40 | 30 x 40 |
| 220 | - | - | - | - | - | - | 25 x 40 | 35 x 40 | 35 x 40 |
| 330 | - | - | - | - | - | - | 30 x 40 | 35 x 50 | 35 x 50 |
| | - | - | - | - | - | - | - | 40 x 40 | 40 x 40 |
| 470 | - | - | - | - | - | - | 35 x 40 | 40 x 50 | 40 x 50 |
| 680 | - | - | - | - | - | 25 x 30 | 35 x 50 | 40 x 70 | 40 x 70 |
| | - | - | - | - | - | - | 40 x 40 | - | - |
| 1000 | - | - | - | - | - | 25 x 40 | 40 x 50 | 40 x 100 | 40 x 100 |
| 1500 | - | - | - | - | - | 30 x 40 | 40 x 70 | - | - |
| 2200 | - | - | - | - | 25 x 30 | 35 x 40 | 40 x 100 | - | - |


| SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm) | | | | | | | | | |
|---|-----------|----------|----------|----------|----------|----------|-----|-----|-----|
| C_R (μF) | U_R (V) | | | | | | | | |
| | 10 | 16 | 25 | 40 | 63 | 100 | 200 | 385 | 400 |
| 3300 | - | - | - | 25 x 30 | 25 x 40 | 35 x 50 | - | - | - |
| | - | - | - | - | - | 40 x 40 | - | - | - |
| 4700 | - | - | 25 x 30 | 25 x 40 | 30 x 40 | 40 x 50 | - | - | - |
| 6800 | - | 25 x 30 | 25 x 40 | 30 x 40 | 35 x 40 | 40 x 70 | - | - | - |
| 10 000 | 25 x 30 | 25 x 40 | 30 x 40 | 35 x 40 | 35 x 50 | 40 x 100 | - | - | - |
| | - | - | - | - | 40 x 40 | - | - | - | - |
| 15 000 | 25 x 40 | 30 x 40 | 35 x 40 | 35 x 50 | 40 x 70 | - | - | - | - |
| | - | - | - | 40 x 40 | - | - | - | - | - |
| 22 000 | 30 x 40 | 35 x 40 | 35 x 50 | 40 x 50 | 40 x 100 | - | - | - | - |
| | - | - | 40 x 40 | - | - | - | - | - | - |
| 33 000 | 35 x 40 | 35 x 50 | 40 x 50 | 40 x 70 | - | - | - | - | - |
| | - | 40 x 40 | - | - | - | - | - | - | - |
| 47 000 | 35 x 50 | 40 x 50 | 40 x 70 | 40 x 100 | - | - | - | - | - |
| | 40 x 40 | - | - | - | - | - | - | - | - |
| 68 000 | 40 x 50 | 40 x 70 | 40 x 100 | - | - | - | - | - | |
| 100 000 | 40 x 70 | 40 x 100 | - | - | - | - | - | - | |
| 150 000 | 40 x 100 | - | - | - | - | - | - | - | |

DIMENSIONS in millimeters **AND AVAILABLE FORMS**

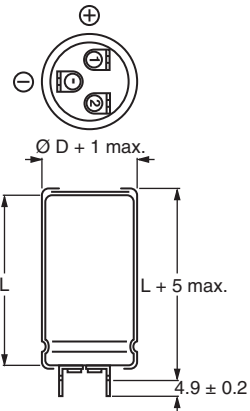


Case $\varnothing D = 25 \text{ mm}$

Fig.2 Printed wiring pin version

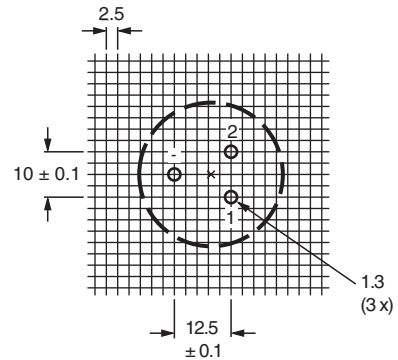


Case $\varnothing D = 25 \text{ mm}$

Fig.3 Mounting hole diagram viewed from component side

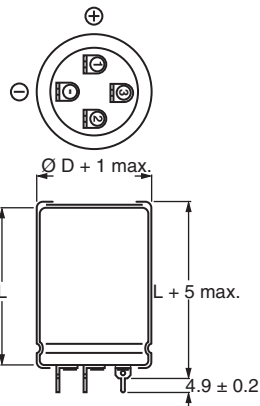


Case $\varnothing D = 30 \text{ mm}$

Fig.4 Printed wiring pin version

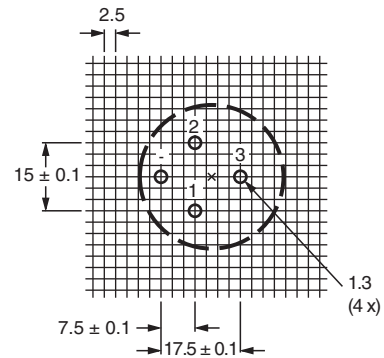


Case $\varnothing D = 30 \text{ mm}$


Fig.5 Mounting hole diagram viewed from component side

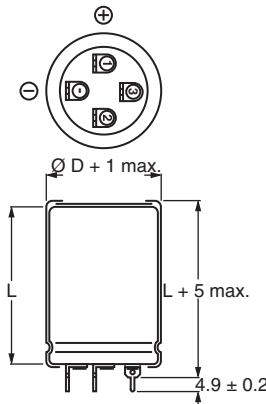


Case Ø D = 35 mm
Fig.6 Printed wiring pin version

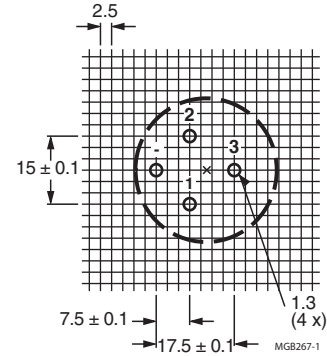

Case Ø D = 35 mm
Fig. 7 Mounting hole diagram viewed from component side

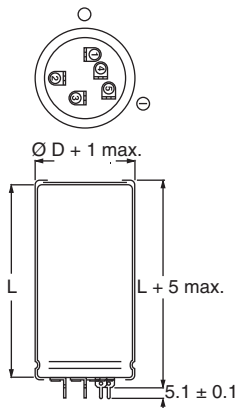

Case Ø D = 40 mm
Fig.8 Printed wiring pin version

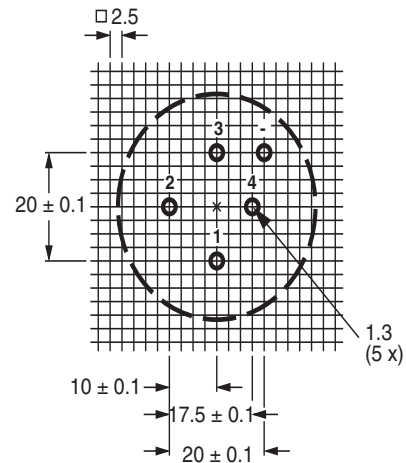

Case Ø D = 40 mm
Fig.9 Mounting hole diagram viewed from component side

Table 1

| DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES PW versions | | | | | |
|--|---------------------|-------------------|----------|--------------------------------------|------------------------------------|
| NOMINAL CASE SIZE Ø D x L | Ø D _{max.} | L _{max.} | MASS (g) | PACKAGING QUANTITIES (units per box) | CARDBOARD BOX DIMENSIONS L x W x H |
| 25 x 30 | 26 | 35 | ≈ 24 | 100 | 290 x 280 x 50 |
| 25 x 40 | 26 | 45 | ≈ 28 | 100 | 290 x 280 x 60 |
| 30 x 40 | 31 | 45 | ≈ 38 | 100 | 340 x 330 x 60 |
| 35 x 40 | 36 | 45 | ≈ 51 | 50 | 390 x 198 x 60 |
| 35 x 50 | 36 | 55 | ≈ 66 | 50 | 390 x 198 x 70 |
| 40 x 40 | 41 | 45 | ≈ 78 | 50 | 440 x 223 x 60 |
| 40 x 50 | 41 | 55 | ≈ 82 | 50 | 440 x 223 x 70 |
| 40 x 70 | 41 | 75 | ≈ 110 | 25 | 230 x 230 x 90 |
| 40 x 100 | 41 | 105 | ≈ 176 | 25 | 230 x 230 x 120 |

MOUNTING

When a number of capacitors are connected in a bank, they must not be closer together than 15 mm, when no derating of ripple current and/or temperature is applied.

Pin numbers 2, 3 and 4 (if present) should be free from the electrical circuit or connected to the minus terminal.



| ELECTRICAL DATA | |
|-----------------|---|
| SYMBOL | DESCRIPTION |
| C _R | rated capacitance at 100 Hz |
| I _R | rated RMS ripple current at 100 Hz, 85 °C or at 20 kHz, 70 °C |
| I _{L1} | max. leakage current after 1 min at U _R |
| I _{L5} | max. leakage current after 5 min at U _R |
| ESR | max. equivalent series resistance at 100 Hz |
| Z | max. impedance at 10 kHz |

ORDERING EXAMPLE

Electrolytic capacitor 051 series
 10 000 µF/25 V; ± 20 %
 Nominal case size: Ø 30 mm x 40 mm
 Ordering code: MAL205156103E3
 Former 12NC: 222205156103

Note

- Unless otherwise specified, all electrical values in tables 2 and 3 apply at T_{amb} = 20 °C, P = 86 kPa to 106 kPa, RH = 45 % to 75 %

Table 2

| ELECTRICAL DATA AND ORDERING INFORMATION 051 SERIES | | | | | | | | | |
|---|----------------------------------|---|--|--|----------------------------------|----------------------------------|-----------------------|---------------------|-------------------------------|
| U _R (V) | C _R 100 Hz (µF) | NOMINAL CASE SIZE Ø D x L (mm) | I _R 100 Hz 85 °C (A) | I _R 20 kHz 70 °C (A) | I _{L1} 1 min (mA) | I _{L5} 5 min (mA) | ESR 100 Hz (mΩ) | Z 10 kHz (mΩ) | ORDERING CODE MAL2051..... |
| 10 | 10 000 | 25 x 30 | 3.1 | 5.9 | 0.60 | 0.20 | 51 | 40 | 54103E3 |
| | 15 000 | 25 x 40 | 4.1 | 7.8 | 0.90 | 0.30 | 37 | 30 | 54153E3 |
| | 22 000 | 30 x 40 | 5.0 | 9.5 | 1.32 | 0.44 | 30 | 25 | 54223E3 |
| | 33 000 | 35 x 40 | 5.5 | 10.4 | 1.98 | 0.66 | 28 | 24 | 54333E3 |
| | 47 000 | 35 x 50 | 6.8 | 12.9 | 2.82 | 0.94 | 23 | 20 | 54473E3 |
| | 47 000 | 40 x 40 | 5.8 | 10.4 | 2.82 | 0.94 | 29 | 22 | 44473E3 |
| | 68 000 | 40 x 50 | 7.1 | 13.5 | 4.08 | 1.36 | 24 | 20 | 54683E3 |
| | 100 000 | 40 x 70 | 9.2 | 17.4 | 6.00 | 2.00 | 19 | 16 | 54104E3 |
| 150 000 | 40 x 100 | 12.0 | 22.7 | 9.00 | 3.00 | 16 | 14 | 54154E3 | |
| 16 | 6800 | 25 x 30 | 3.1 | 5.9 | 0.65 | 0.22 | 53 | 42 | 55682E3 |
| | 10 000 | 25 x 40 | 4.0 | 7.6 | 0.96 | 0.32 | 39 | 34 | 55103E3 |
| | 15 000 | 30 x 40 | 5.0 | 9.5 | 1.44 | 0.48 | 31 | 27 | 55153E3 |
| | 22 000 | 35 x 40 | 5.5 | 10.4 | 2.12 | 0.71 | 29 | 26 | 55223E3 |
| | 33 000 | 35 x 50 | 6.7 | 12.7 | 3.17 | 1.06 | 23 | 21 | 55333E3 |
| | 33 000 | 40 x 40 | 5.7 | 10.8 | 3.17 | 1.06 | 30 | 24 | 45333E3 |
| | 47 000 | 40 x 50 | 7.0 | 13.3 | 4.52 | 1.51 | 24 | 20 | 55473E3 |
| | 68 000 | 40 x 70 | 9.2 | 17.4 | 6.53 | 2.18 | 19 | 16 | 55683E3 |
| 100 000 | 40 x 100 | 12.0 | 22.7 | 9.60 | 3.20 | 16 | 14 | 55104E3 | |
| 25 | 4700 | 25 x 30 | 2.9 | 5.5 | 0.71 | 0.24 | 60 | 42 | 56472E3 |
| | 6800 | 25 x 40 | 3.9 | 7.4 | 1.02 | 0.34 | 42 | 34 | 56682E3 |
| | 10 000 | 30 x 40 | 4.8 | 9.1 | 1.50 | 0.50 | 34 | 27 | 56103E3 |
| | 15 000 | 35 x 40 | 5.3 | 10.0 | 2.25 | 0.75 | 30 | 26 | 56153E3 |
| | 22 000 | 35 x 50 | 6.5 | 12.3 | 3.30 | 1.10 | 24 | 21 | 56223E3 |
| | 22 000 | 40 x 40 | 5.7 | 10.8 | 3.30 | 1.10 | 31 | 24 | 46223E3 |
| | 33 000 | 40 x 50 | 7.0 | 13.3 | 4.95 | 1.65 | 25 | 20 | 56333E3 |
| | 47 000 | 40 x 70 | 9.2 | 17.4 | 7.05 | 2.35 | 19 | 16 | 56473E3 |
| 68 000 | 40 x 100 | 12.0 | 22.7 | 10.20 | 3.40 | 16 | 14 | 56683E3 | |
| 40 | 3300 | 25 x 30 | 2.9 | 5.5 | 0.80 | 0.27 | 87 | 63 | 57332E3 |
| | 4700 | 25 x 40 | 3.8 | 7.2 | 1.13 | 0.38 | 62 | 47 | 57472E3 |
| | 6800 | 30 x 40 | 4.7 | 8.9 | 1.64 | 0.55 | 49 | 38 | 57682E3 |
| | 10 000 | 35 x 40 | 5.2 | 9.8 | 2.40 | 0.80 | 48 | 37 | 57103E3 |
| | 15 000 | 35 x 50 | 6.3 | 11.9 | 3.60 | 1.20 | 37 | 28 | 57153E3 |
| | 15 000 | 40 x 40 | 5.6 | 10.6 | 3.60 | 1.20 | 50 | 35 | 47153E3 |
| | 22 000 | 40 x 50 | 5.8 | 11.0 | 5.28 | 1.76 | 39 | 28 | 57223E3 |
| | 33 000 | 40 x 70 | 7.8 | 14.8 | 7.92 | 2.64 | 28 | 21 | 57333E3 |
| 47 000 | 40 x 100 | 10.4 | 19.7 | 11.28 | 3.76 | 22 | 17 | 57473E3 | |

| ELECTRICAL DATA AND ORDERING INFORMATION 051 SERIES | | | | | | | | | |
|---|----------------------------------|---|--|--|----------------------------------|----------------------------------|-----------------------|---------------------|-------------------------------|
| U _R (V) | C _R 100 Hz (μF) | NOMINAL CASE SIZE Ø D x L (mm) | I _R 100 Hz 85 °C (A) | I _R 20 kHz 70 °C (A) | I _{L1} 1 min (mA) | I _{L5} 5 min (mA) | ESR 100 Hz (mΩ) | Z 10 kHz (mΩ) | ORDERING CODE MAL2051..... |
| 63 | 2200 | 25 x 30 | 2.5 | 4.7 | 0.84 | 0.28 | 83 | 62 | 58222E3 |
| | 3300 | 25 x 40 | 3.3 | 6.2 | 1.25 | 0.42 | 58 | 42 | 58332E3 |
| | 4700 | 30 x 40 | 4.1 | 7.8 | 1.78 | 0.60 | 49 | 38 | 58472E3 |
| | 6800 | 35 x 40 | 4.5 | 8.5 | 2.57 | 0.86 | 48 | 37 | 58682E3 |
| | 10 000 | 35 x 50 | 5.4 | 10.2 | 3.78 | 1.26 | 37 | 28 | 58103E3 |
| | 10 000 | 40 x 40 | 4.6 | 8.7 | 3.78 | 1.26 | 52 | 37 | 48103E3 |
| | 15 000 | 40 x 70 | 7.5 | 14.2 | 5.67 | 1.89 | 29 | 24 | 58153E3 |
| | 22 000 | 40 x 100 | 10.0 | 19.0 | 8.32 | 2.77 | 22 | 19 | 58223E3 |
| 100 | 680 | 25 x 30 | 1.74 | 3.30 | 0.41 | 0.14 | 190 | 130 | 59681E3 |
| | 1000 | 25 x 40 | 2.34 | 4.44 | 0.60 | 0.20 | 130 | 90 | 59102E3 |
| | 1500 | 30 x 40 | 2.95 | 5.59 | 0.90 | 0.30 | 95 | 67 | 59152E3 |
| | 2200 | 35 x 40 | 3.69 | 7.00 | 1.32 | 0.44 | 71 | 53 | 59222E3 |
| | 3300 | 35 x 50 | 4.37 | 8.29 | 1.98 | 0.66 | 55 | 41 | 59332E3 |
| | 3300 | 40 x 40 | 4.16 | 7.89 | 1.98 | 0.66 | 64 | 48 | 49332E3 |
| | 4700 | 40 x 50 | 5.21 | 9.88 | 2.82 | 0.94 | 49 | 38 | 59472E3 |
| | 6800 | 40 x 70 | 6.97 | 13.22 | 4.08 | 1.36 | 35 | 28 | 59682E3 |
| | 10 000 | 40 x 100 | 9.50 | 18.00 | 6.00 | 2.00 | 26 | 21 | 59103E3 |

Table 3

| ELECTRICAL DATA AND ORDERING INFORMATION 053 SERIES | | | | | | | | | |
|---|----------------------------------|---|--|--|----------------------------------|----------------------------------|-----------------------|---------------------|-------------------------------|
| U _R (V) | C _R 100 Hz (μF) | NOMINAL CASE SIZE Ø D x L (mm) | I _R 100 Hz 85 °C (A) | I _R 20 kHz 70 °C (A) | I _{L1} 1 min (mA) | I _{L5} 5 min (mA) | ESR 100 Hz (mΩ) | Z 10 kHz (mΩ) | ORDERING CODE MAL2053..... |
| 200 | 150 | 25 x 30 | 0.70 | 1.33 | 0.18 | 0.06 | 1000 | 770 | 52151E3 |
| | 220 | 25 x 40 | 0.94 | 1.78 | 0.26 | 0.09 | 680 | 525 | 52221E3 |
| | 330 | 30 x 40 | 1.27 | 2.41 | 0.40 | 0.14 | 460 | 360 | 52331E3 |
| | 470 | 35 x 40 | 1.66 | 3.15 | 0.57 | 0.19 | 320 | 250 | 52471E3 |
| | 680 | 35 x 50 | 2.19 | 4.15 | 0.82 | 0.28 | 220 | 170 | 52681E3 |
| | 680 | 40 x 40 | 2.17 | 4.11 | 0.82 | 0.28 | 220 | 170 | 42681E3 |
| | 1000 | 40 x 50 | 2.86 | 5.42 | 1.20 | 0.40 | 150 | 115 | 52102E3 |
| | 1500 | 40 x 70 | 3.81 | 7.22 | 1.80 | 0.60 | 110 | 85 | 52152E3 |
| 2200 | 40 x 100 | 5.20 | 9.86 | 2.64 | 0.88 | 80 | 60 | 52222E3 | |
| 385 | 68 | 25 x 30 | 0.47 | 0.89 | 0.16 | 0.06 | 2200 | 1480 | 58689E3 |
| | 100 | 25 x 40 | 0.64 | 1.21 | 0.23 | 0.08 | 1500 | 1020 | 58101E3 |
| | 150 | 30 x 40 | 0.90 | 1.71 | 0.35 | 0.12 | 1000 | 700 | 58151E3 |
| | 220 | 35 x 40 | 1.15 | 2.18 | 0.51 | 0.17 | 680 | 480 | 58221E3 |
| | 330 | 35 x 50 | 1.53 | 2.90 | 0.77 | 0.26 | 450 | 340 | 58331E3 |
| | 330 | 40 x 40 | 1.52 | 2.88 | 0.77 | 0.26 | 450 | 340 | 48331E3 |
| | 470 | 40 x 50 | 1.96 | 3.72 | 1.09 | 0.36 | 320 | 260 | 58471E3 |
| | 680 | 40 x 70 | 2.70 | 5.12 | 1.58 | 0.53 | 220 | 190 | 58681E3 |
| 1000 | 40 x 100 | 3.70 | 7.02 | 2.31 | 0.78 | 180 | 140 | 58102E3 | |
| 400 | 68 | 25 x 30 | 0.54 | 1.02 | 0.16 | 0.06 | 2100 | 1000 | 56689E3 |
| | 100 | 25 x 40 | 0.73 | 1.38 | 0.24 | 0.08 | 1400 | 780 | 56101E3 |
| | 150 | 30 x 40 | 0.98 | 1.86 | 0.36 | 0.12 | 950 | 520 | 56151E3 |
| | 220 | 35 x 40 | 1.28 | 2.43 | 0.52 | 0.17 | 650 | 400 | 56221E3 |
| | 330 | 35 x 50 | 1.67 | 3.17 | 0.79 | 0.26 | 480 | 280 | 56331E3 |
| | 330 | 40 x 40 | 1.67 | 3.17 | 0.79 | 0.26 | 480 | 280 | 46331E3 |
| | 470 | 40 x 50 | 2.12 | 4.02 | 1.12 | 0.37 | 340 | 220 | 56471E3 |
| | 680 | 40 x 70 | 2.90 | 5.50 | 1.63 | 0.54 | 235 | 155 | 56681E3 |
| 1000 | 40 x 100 | 4.05 | 7.68 | 2.40 | 0.80 | 160 | 110 | 56102E3 | |

| ADDITIONAL ELECTRICAL DATA | | |
|------------------------------------|--|--|
| PARAMETER | CONDITIONS | VALUE |
| Voltage | | |
| Surge voltage | ≤ 250 V versions | $U_s = 1.15 \times U_R$ |
| | ≥ 385 V versions | $U_s = 1.1 \times U_R$ |
| Reverse voltage | | $U_{rev} \leq 1 \text{ V}$ |
| Current | | |
| Leakage current | After 1 min at U_R | $I_{L1} \leq 0.006 C_R \times U_R + 4 \mu\text{A}$ |
| | After 5 min at U_R | $I_{L5} \leq 0.002 C_R \times U_R + 4 \mu\text{A}$ |
| Inductance | | |
| Equivalent series inductance (ESL) | Case $\varnothing D = 25 \text{ mm}$ | max. 25 nH |
| | Case $\varnothing D = 30 \text{ mm}$ and 35 mm | max. 30 nH |
| | Case $\varnothing D = 40 \text{ mm}$ | max. 35 nH |

CAPACITANCE (C)

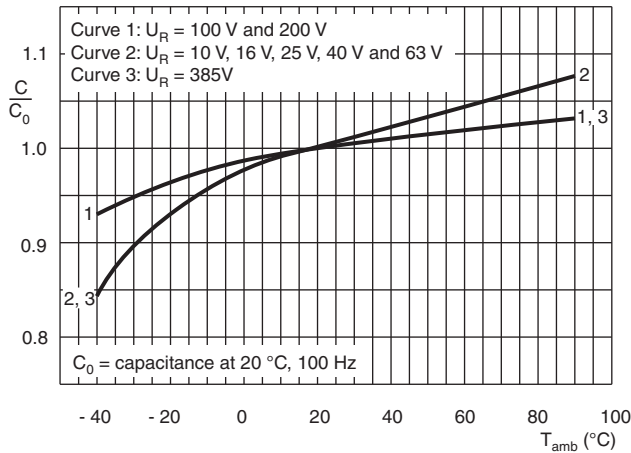


Fig.10 Typical multiplier of capacitance as a function of ambient temperature

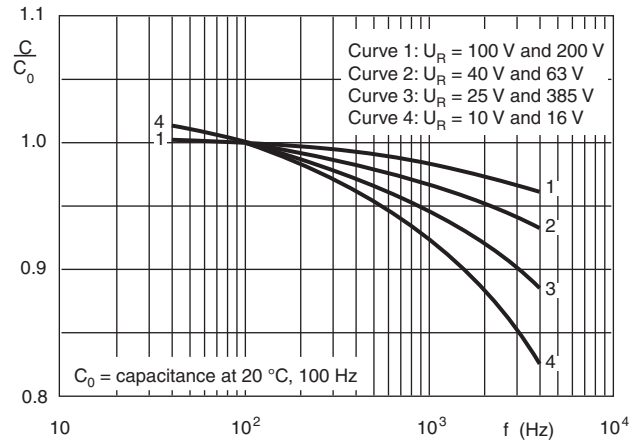


Fig.11 Typical multiplier of capacitance as a function of frequency

EQUIVALENT SERIES RESISTANCE (ESR)

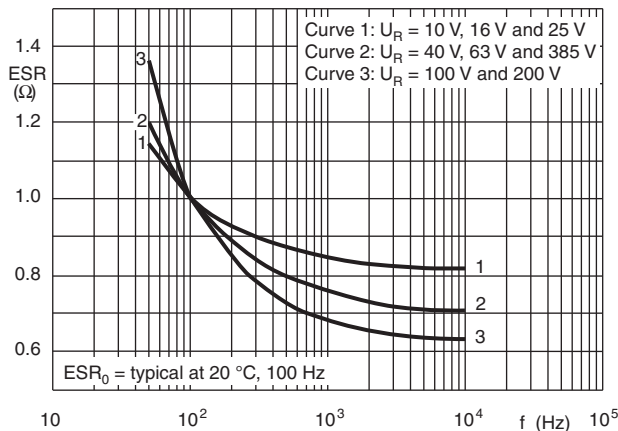


Fig.12 Typical multiplier of typical ESR as a function of frequency

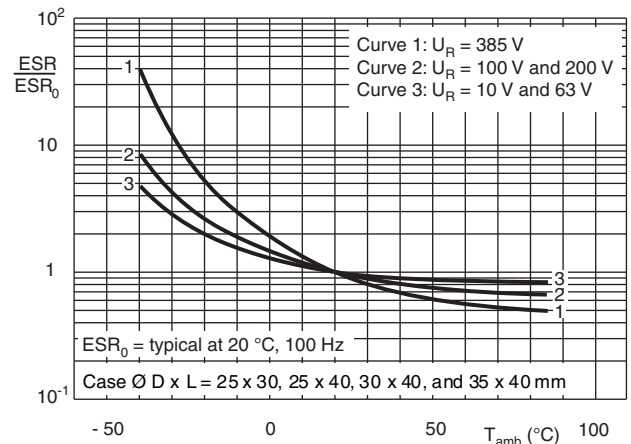


Fig.13 Typical multiplier of ESR as a function of ambient temperature



EQUIVALENT RESISTANCE (ESR)

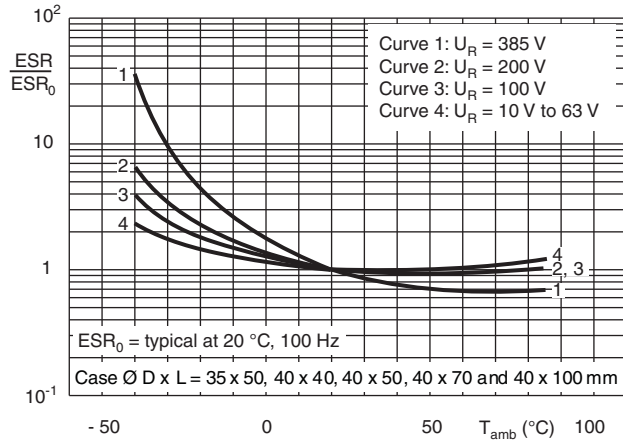


Fig.14 Typical multiplier of ESR as a function of ambient temperature

IMPEDANCE (Z)

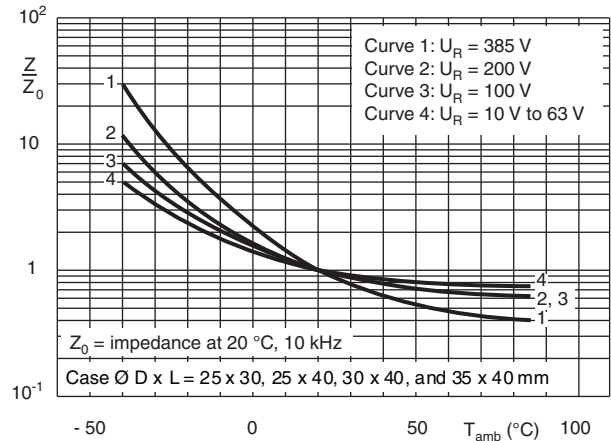


Fig.15 Typical multiplier of impedance as a function of ambient temperature

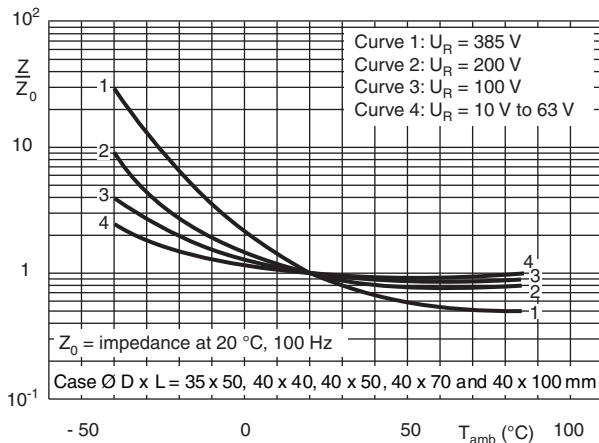


Fig.16 Typical multiplier of impedance as a function of ambient temperature

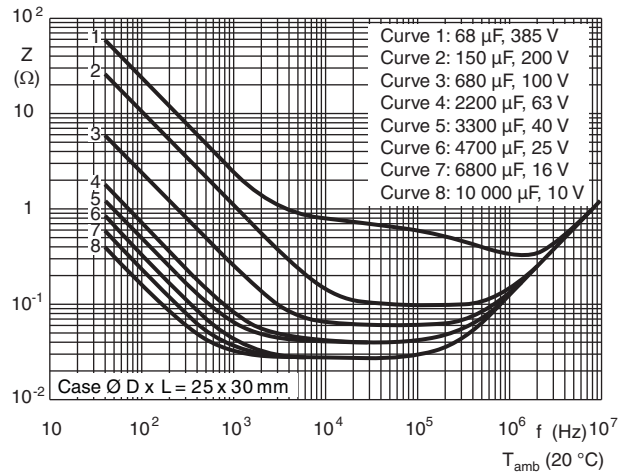


Fig.17 Typical impedance as a function of frequency

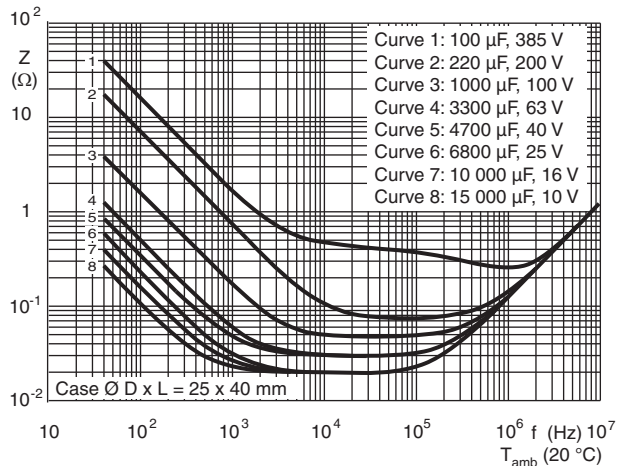


Fig.18 Typical impedance as a function of frequency

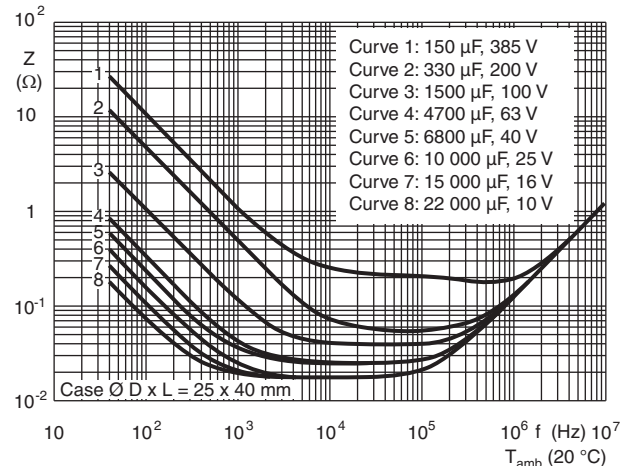


Fig.19 Typical impedance as a function of frequency

IMPEDANCE (Z)

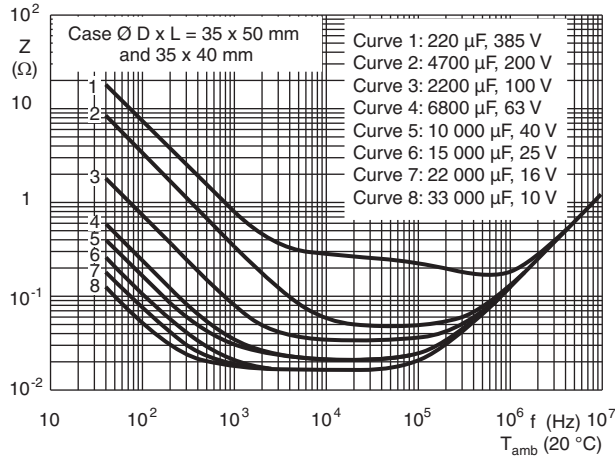


Fig.20 Typical impedance as a function of frequency

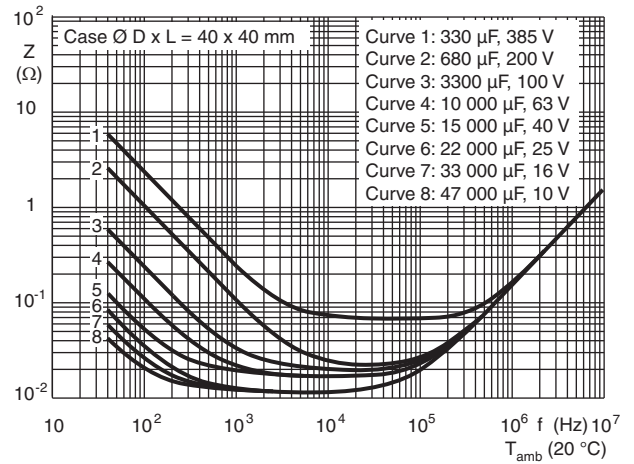


Fig.21 Typical impedance as a function of frequency

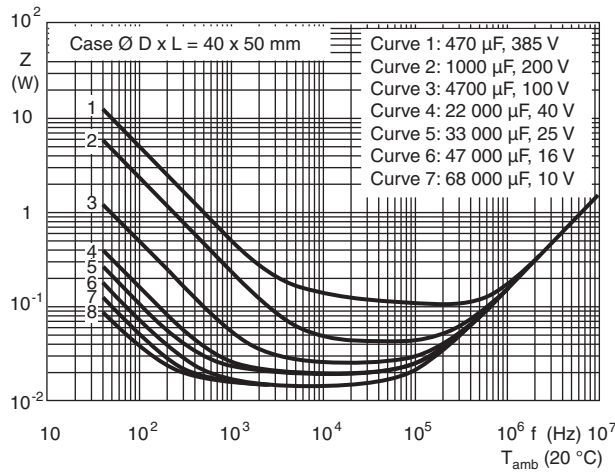


Fig.22 Typical impedance as a function of frequency

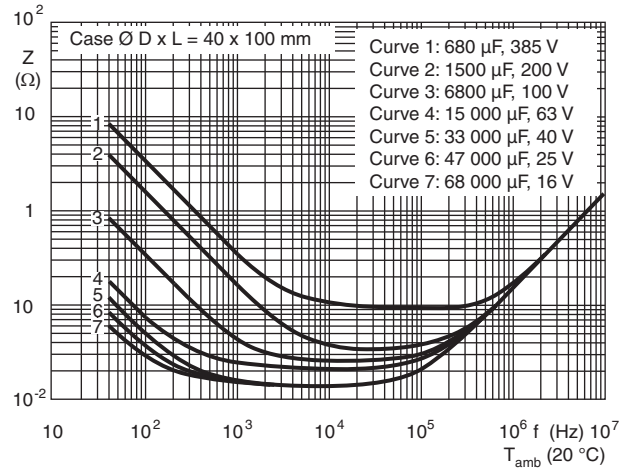


Fig.23 Typical impedance as a function of frequency


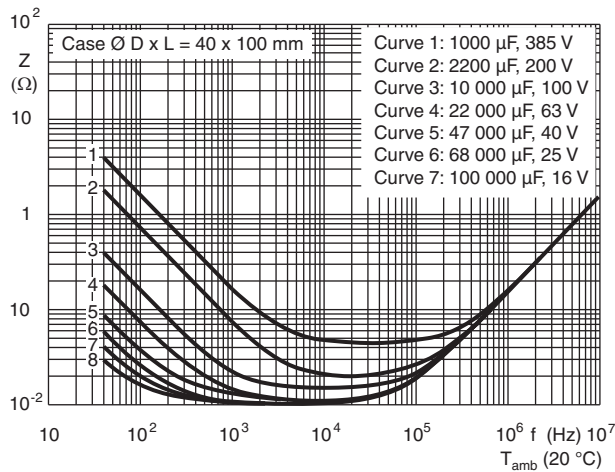


Fig.24 Typical impedance as a function of frequency

RIPPLE CURRENT AND USEFUL LIFE

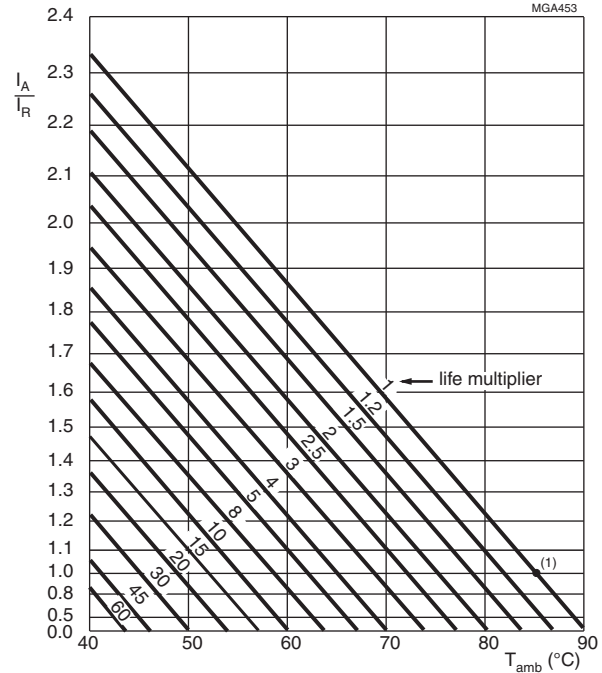

I_A = actual ripple current at 100 Hz
 I_R = rated ripple current at 100 Hz and 85 °C
 (1) Useful life at 85 °C and I_R applied: 12 000 h

Fig.25 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 4

| MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY | |
|---|------------------|
| FREQUENCY (Hz) | I_R MULTIPLIER |
| 50 | 0.83 |
| 100 | 1.00 |
| 200 | 1.10 |
| 400 | 1.15 |
| 1000 | 1.19 |
| ≥ 2000 | 1.20 |

Table 5

| TEST PROCEDURES AND REQUIREMENTS | | | |
|--|--|---|---|
| TEST | | PROCEDURE (quick reference) | REQUIREMENTS |
| NAME OF TEST | REFERENCE | | |
| Endurance | IEC 60384-4/ EN130300 subclause 4.13 | $T_{amb} = 85\text{ °C}$; U_R applied; 5000 h | $U_R \leq 100\text{ V}$; $\Delta C/C: \pm 15\%$ $U_R > 100\text{ V}$; $\Delta C/C: \pm 10\%$ $ESR \leq 1.3 \times \text{spec. limit}$ $Z \leq 2 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ |
| Useful life | CECC 30301 subclause 1.8.1 | $T_{amb} = 85\text{ °C}$; U_R and I_R applied; 12 000 h | $U_R \leq 100\text{ V}$; $\Delta C/C: \pm 45\%$ $U_R > 100\text{ V}$; $\Delta C/C: \pm 30\%$ $ESR \leq 3 \times \text{spec. limit}$ $Z \leq 3 \times \text{spec. limit}$ $I_{L5} \leq \text{spec. limit}$ no short or open circuit, no visible damage total failure percentage: $U_R \leq 100\text{ V}: \leq 1\%$; $U_R > 100\text{ V}: \leq 3\%$ |
| Shelf life (storage at high temperature) | IEC 60384-4/ EN130300 subclause 4.17 | $T_{amb} = 85\text{ °C}$; no voltage applied; 500 h after test: U_R to be applied for 30 min, 24 h to 48 h before measurement | $\Delta C/C: \pm 10\%$ $ESR \leq 1.2 \times \text{spec. limit}$ $I_{L5} \leq 2 \times \text{spec. limit}$ |



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.