



LCD15 SERIES

FEATURES

- 15 WATTS MAXIMUM OUTPUT POWER
- SINGLE OUTPUT UP TO 4A
- SMALL SIZE AND LOW PROFILE : 1.0 x 1.0 x 0.39 Inch
- HIGH EFFICIENCY UP TO 89%
- 2:1 WIDE INPUT VOLTAGE RANGE
- SIX-SIDED CONTINUOUS SHIELD
- FIXED SWITCHING FREQUENCY
- INPUT TO OUTPUT ISOLATION
- INDUSTRY STANDARD PIN-OUT FEC15 SERIES COMPATIBLE
- CE MARK MEETS 2006/95/EC, 93/68/EEC AND 2004/108/EC
- UL60950-1, EN60950-1 AND IEC60950-1 LICENSED
- ISO9001 CERTIFIED MANUFACTURING FACILITIES
- COMPLIANT TO RoHS EU DIRECTIVE 2002/95/EC

APPLICATIONS

Wireless Network
Telecom/Datacom
Industry Control System
Measurement Equipment
Semiconductor Equipment

OPTIONS

Positive logic Remote On/Off, Without trim, Without On/Off pin

DESCRIPTION

LCD15 DC/DC converters provide up to 15 watts of output power in an industry standard package and footprint. These units are specifically designed to meet the power needs of low profile. All models feature with 2:1 wide input voltage of 9-18 VDC, 18-36 VDC and 36-75VDC, comprehensively protected against over-current, over-voltage and input under-voltage protection conditions, and trimmable output voltage.

TECHNICAL SPECIFICATION

All specifications are typical at nominal input, full load and 25°C otherwise noted

OUTPUT SPECIFICATIONS		
Output power	15 Watts	
Voltage accuracy	Full load and nominal Vin	±1%
Minimum load		0%
Voltage adjustability (Note 6)		±10%
Line regulation	LL to HL at Full Load	Single Dual
		± 0.2% ± 0.5%
Load regulation	No Load to Full Load	Single Dual
		± 0.2% ± 1.0%
Cross regulation (Dual)	Asymmetrical load 25% / 100% FL	± 5%
Ripple and noise	20MHz bandwidth (Measured with a 1uF M/C and a 10uF T/C)	See table
Temperature coefficient		±0.02% / °C, max.
Transient response	recovery time 25% load step change	250uS
Over voltage protection	3.3V output 5V output 12V output 15V output	3.7VDC-5.4VDC 5.6VDC-7.0VDC 13.5VDC-19.6VDC 16.8VDC-20.5VDC
Over load protection	% of FL at nominal input	150%, typ.
Short circuit protection		Hiccup, automatics recovery
GENERAL SPECIFICATIONS		
Efficiency	See table	
Isolation voltage	Input to Output Input(Output) to Case	1600VDC, min. 1000VDC, min.
Isolation resistance		10 ⁹ ohms, min.
Isolation capacitance		1000pF, max.
Switching frequency		400KHz, typ.
Approvals and standard	IEC60950-1, UL60950-1, EN60950-1	
Case material		Nickel-coated copper
Base material		FR4 PCB
Potting material		Epoxy (UL94-V0)
Dimensions		1.0 X 1.0 X 0.39 Inch (25.4 X 25.4 X 9.9 mm)
Weight		15g
MTBF (Note 1)	BELLCORE TR-NWT-000332 MIL-HDBK-217F	1.330x10 ⁶ hrs 5.630x10 ⁵ hrs

INPUT SPECIFICATIONS			
Input voltage range	12V nominal input 24V nominal input 48V nominal input	9 – 18VDC 18 – 36VDC 36 – 75VDC	
Input surge voltage 100mS max	12V input 24V input 48V input	36VDC 50VDC 100VDC	
Input reflected ripple current	Nominal Vin and full load	30mA p-p	
Start up time	Nominal Vin and constant resistive load	Power up Remote ON/OFF	30ms, max. 30ms, max.
Start-up voltage	12V input 24V input 48V input	9VDC 17VDC 33VDC	
Shutdown voltage	12V input 24V input 48V input	8VDC 14.5VDC 30.5VDC	
Remote ON/OFF (Note 7)	DC-DC ON DC-DC OFF	Open or 3V < Vr < 15V Short or 0V < Vr < 1.2V	
Positive logic(Option)	DC-DC ON DC-DC OFF	Short or 0V < Vr < 1.2V Open or 3V < Vr < 15V	
Negative logic(Standard)	DC-DC OFF	Open or 3V < Vr < 15V	
Input current of Remote control pin	Nominal Vin	-0.5mA~1.0mA	
Remote off state input current	Nominal Vin	2.5mA	
ENVIRONMENTAL SPECIFICATIONS			
Operating ambient temperature		-40°C to +85°C (with derating)	
Maximum case temperature		105°C	
Storage temperature range		-55°C ~ +125°C	
Thermal impedance (Note 8)	Nature convection Nature convection with heat-sink	18.2°C/Watt 15.8°C/Watt	
Thermal shock		MIL-STD-810F	
Vibration		MIL-STD-810F	
Relative humidity		5% to 95% RH	
EMC CHARACTERISTICS			
EMI (Note 9)	EN55022	Class A	
ESD	EN61000-4-2	Air ± 8KV Contact ± 6KV	Perf. Criteria A
Radiated immunity	EN61000-4-3	10 V/m	Perf. Criteria A
Fast transient (Note 10)	EN61000-4-4	± 2KV	Perf. Criteria A
Surge (Note 10)	EN61000-4-5	± 1KV	Perf. Criteria A
Conducted immunity	EN61000-4-6	3 Vr.m.s	Perf. Criteria A









**POWER MATE
TECHNOLOGY CO.,LTD.**

15 WATTS DC-DC CONVERTER

Model Number	Input Range	Output Voltage	Output Current		Output ⁽⁴⁾ Ripple & Noise	Input Current		Eff ⁽⁴⁾ (%)	Capacitor ⁽⁵⁾ Load max
			Min. Load	Full Load		No Load ⁽³⁾	Full Load ⁽²⁾		
LCD15-12S3P3	9 - 18 VDC	3.3 VDC	0mA	4000mA	75mVp-p	120mA	1375mA	84	1000µF
LCD15-12S05	9 - 18 VDC	5 VDC	0mA	3000mA	75mVp-p	90mA	1524mA	86	1000µF
LCD15-12S12	9 - 18 VDC	12 VDC	0mA	1300mA	100mVp-p	40mA	1605mA	85	330µF
LCD15-12S15	9 - 18 VDC	15 VDC	0mA	1000mA	100mVp-p	40mA	1506mA	87	220µF
LCD15-12D05	9 - 18 VDC	± 5 VDC	0mA	± 1500mA	100mVp-p	30mA	1543mA	85	± 500µF
LCD15-12D12	9 - 18 VDC	± 12 VDC	0mA	± 625mA	100mVp-p	30mA	1506mA	87	± 150µF
LCD15-12D15	9 - 18 VDC	± 15 VDC	0mA	± 500mA	100mVp-p	30mA	1488mA	88	± 100µF
LCD15-24S3P3	18 - 36 VDC	3.3 VDC	0mA	4000mA	75mVp-p	50mA	671mA	86	1000µF
LCD15-24S05	18 - 36 VDC	5 VDC	0mA	3000mA	75mVp-p	65mA	763mA	86	1000µF
LCD15-24S12	18 - 36 VDC	12 VDC	0mA	1300mA	100mVp-p	20mA	783mA	87	330µF
LCD15-24S15	18 - 36 VDC	15 VDC	0mA	1000mA	100mVp-p	20mA	744mA	88	220µF
LCD15-24D05	18 - 36 VDC	± 5 VDC	0mA	± 1500mA	100mVp-p	20mA	772mA	85	± 500µF
LCD15-24D12	18 - 36 VDC	± 12 VDC	0mA	± 625mA	100mVp-p	15mA	744mA	88	± 150µF
LCD15-24D15	18 - 36 VDC	± 15 VDC	0mA	± 500mA	100mVp-p	25mA	744mA	88	± 100µF
LCD15-48S3P3	36 - 75 VDC	3.3 VDC	0mA	4000mA	75mVp-p	40mA	336mA	86	1000µF
LCD15-48S05	36 - 75 VDC	5 VDC	0mA	3000mA	75mVp-p	40mA	372mA	88	1000µF
LCD15-48S12	36 - 75 VDC	12 VDC	0mA	1300mA	100mVp-p	15mA	387mA	88	330µF
LCD15-48S15	36 - 75 VDC	15 VDC	0mA	1000mA	100mVp-p	15mA	372mA	88	220µF
LCD15-48D05	36 - 75 VDC	± 5 VDC	0mA	± 1500mA	100mVp-p	15mA	386mA	85	± 500µF
LCD15-48D12	36 - 75 VDC	± 12 VDC	0mA	± 625mA	100mVp-p	15mA	368mA	89	± 150µF
LCD15-48D15	36 - 75 VDC	± 15 VDC	0mA	± 500mA	100mVp-p	20mA	372mA	88	± 100µF

Note

1. BELLCORE TR-NWT-000332, Case 1: 50% Stress, Temperature at 40°C.
MIL-HDBK-217F Notice2 @Ta=25 °C, Full load(Ground, Benign, controlled environment)
2. Maximum value at nominal input voltage and full load.
3. Typical value at nominal input voltage and no load.
4. Typical value at nominal input voltage and full load.
5. Test by minimum Vin and constant resistive load.
6. Trimming allows the user to increase or decrease the output voltage set point of the module. This is accomplished by connecting an external resistor between the TRIM pin and either the +VOUT pin or the -VOUT pin.
7. The ON/OFF control pin voltage is reference to -Vin.
The order number please see product standard table.
8. Heat sink is optional and P/N:7G-0047C-F
9. The LCD15 series can meet EN55022 Class A with parallel external capacitors to the input pins.
Recommend : 12Vin : 10µF /25V 1812 MLCC
24Vin : 6.8µF /50V * 2 pcs 1812 MLCC
48Vin : 2.2µF /100V * 2 pcs 1812 MLCC
10. An external input filter capacitor is required if the module has to meet EN61000-4-4, EN61000-4-5.
The filter capacitor Power Mate suggest: Nippon chemi-con KY series, 220µF/100V, ESR 48mΩ.

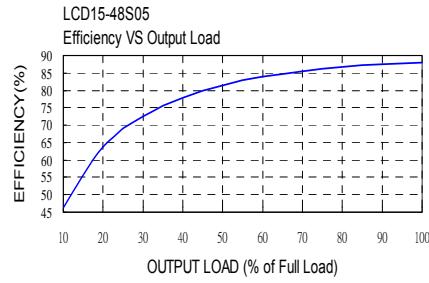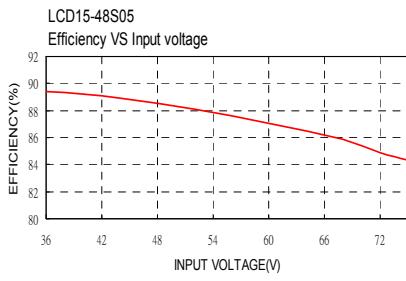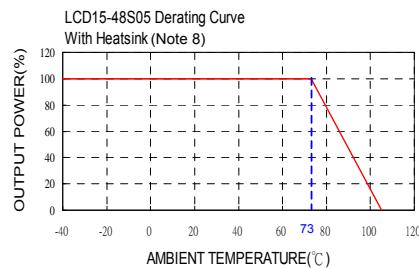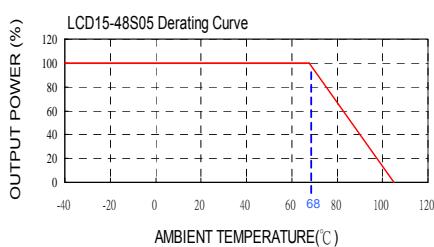


WWW.PDUKE.COM




**POWER MATE
TECHNOLOGY CO.,LTD.**

15 WATTS DC-DC CONVERTER

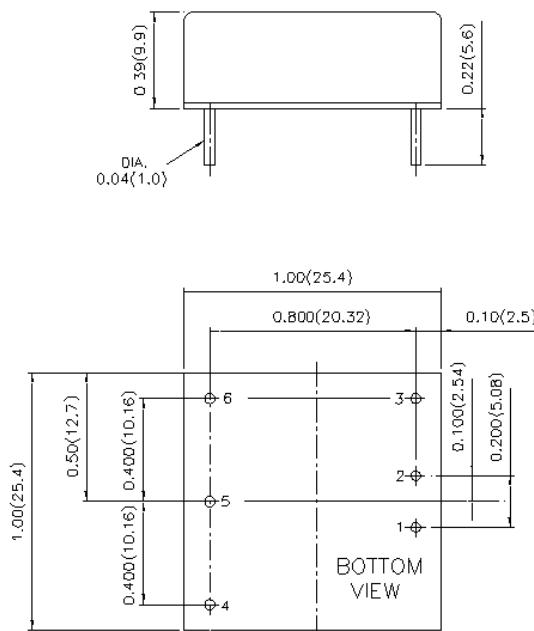

- All dimensions in Inches (mm)
Tolerance: X.XX±0.02 (X.X±0.5)
X.XXX±0.01 (X.XX±0.25)
- Pin pitch tolerance ±0.01(0.25)
- Pin dimension tolerance ±0.004 (0.1)


PIN CONNECTION		
PIN	SINGLE	DUAL
1	+ INPUT	+ INPUT
2	- INPUT	- INPUT
3	ON/OFF	ON/OFF
4	+VOUT	+VOUT
5	TRIM	COMMON
6	-VOUT	-VOUT

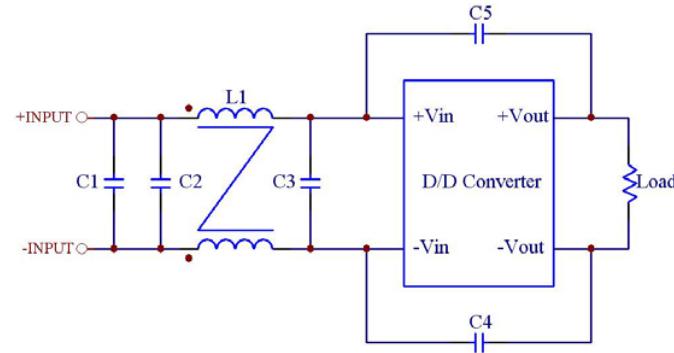

Recommended Filter for EN55022 Class B Compliance

The components used in the above figure, together with the manufacturers' part numbers for these components, are as follows:

	C1	C2	C3	C4 & C5	L1
LCD15-12xxx	10µF/25V 1812 MLCC	N/A	10µF/25V 1812 MLCC	470pF/2KV 1808 MLCC	145µH Common Choke PMT-051
LCD15-24xxx	6.8µF/50V 1812 MLCC	N/A	6.8µF/50V 1812 MLCC	470pF/2KV 1808 MLCC	325µH Common Choke PMT-050
LCD15-48xxx	2.2µF/100V 1812 MLCC	2.2µF/100V 1812 MLCC	2.2µF/100V 1812 MLCC	1000pF/2KV 1808 MLCC	325µH Common Choke PMT-050

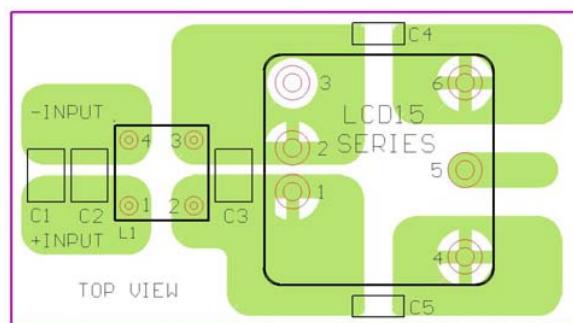

Recommended EN55022 Class B Filter Circuit Layout

EXTERNAL OUTPUT TRIMMING	
Output can be externally trimmed by using the method shown below.	
TRIM UP	6 ↪ R _U ↪ 5 ↪ R _D ↪ 4 ↪
TRIM DOWN	5 ↪ R _U ↪ 6 ↪ R _D ↪ 4 ↪

PRODUCT STANDARD TABLE	
Option	Suffix
Negative remote ON/OFF(Standard)	
Positive remote ON/OFF without ON/OFF pin	-A
negative remote ON/OFF without TRIM pin	-B
without ON/OFF&TRIM pin	-C
positive remote ON/OFF without TRIM pin	-D
	-E



WWW.PDUKE.COM

Page 3 of 3 Issued Date : 2008/05/21