



SiI 1390/1930/1368 PanelLink/HDCP Transmitters



Applications


- Media Center PCs
- Desktop PC Motherboards
- Add-In Graphics Cards
- ADD2 Expansion Cards
- Notebook PCs

Silicon Image introduces a new series of PanelLink® transmitters that bring advanced multimedia functionality to PC products. Leveraging PanelLink technology, these transmitters interface seamlessly to a variety of PC graphics sources to support DVI and HDMI™ displays with resolutions up to UXGA or 1080p. Built into the transmitters, the High-bandwidth Digital Content Protection (HDCP) engine secures the digital link for transmission of valuable HD video and even audio when used with the SiI 1390™ and SiI 1930™'s HDMI output. These transmitters are preprogrammed with unique HDCP keys, providing the highest level of security while reducing manufacturing complexity and cost.

The new SiI 1390 and SiI 1368™ transmitters provide a fully compliant 25-165 MHz HDMI and DVI HDCP output respectively. Each product accepts the full operating range of SDVO (1-2 GHz) on the input port with a robust, highly jitter-tolerant implementation exceeding the requirements of the Intel SDVO 1.0 specification. As an HDMI transmitter, the SiI 1390 supports a variety of audio interfaces including I²S, S/PDIF, or the Intel HD-Audio interface to enable broad hardware compatibility. When using the high-resolution HD-Audio port, this chip is capable of supporting the DVD Audio standard and other digital audio formats consisting of up to 8 channels at 192 kHz. To improve manufacturers' time-to-market, the SiI 1390 and SiI 1368 are pin-compatible with the previous generation SiI 1364 DVI transmitter in a 64-pin TQFP package with EPad.

The SiI 1930 transmitter is designed to generate a fully compliant 25-165 MHz HDMI output. The SiI 1930 interfaces to a variety of industry-leading GPUs with integrated TMDS® transmitters by accepting a TMDS input. The SiI 1930 also has a variety of audio interface ports (I²S, S/PDIF, or HD-Audio), and can support the DVD Audio standard and other digital audio formats consisting of up to 8 channels at 192 kHz when using the HD-Audio port.

This latest family of PanelLink transmitters brings a comprehensive suite of solutions to enable PC platforms to offer new levels of multimedia performance with access to premium HD video and audio content. Each product is HDCP 1.1-compliant and supports repeaters by implementing on-chip Secure Hash Algorithm (SHA-1) logic and provides convenient and secure on-chip, preprogrammed HDCP keys.

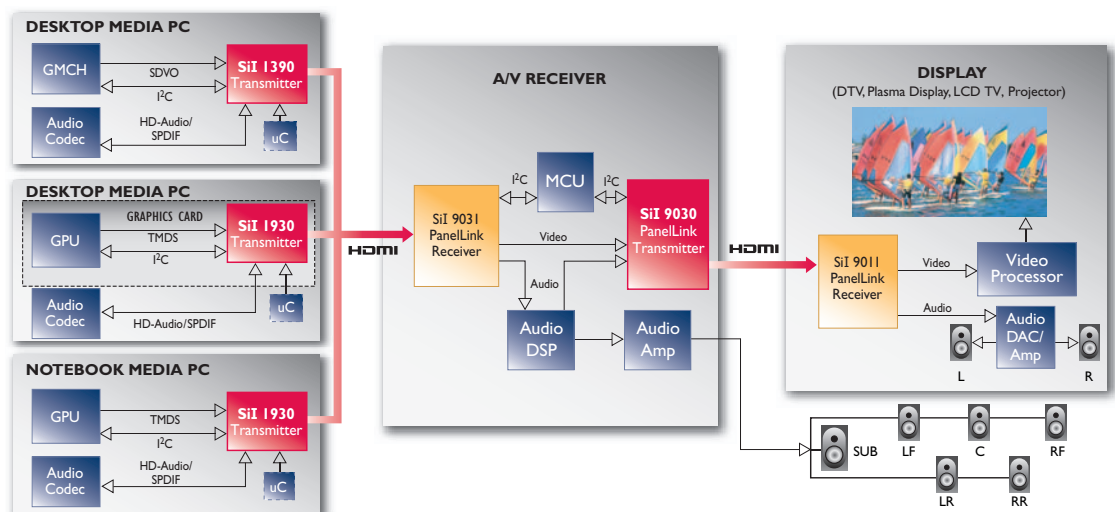

PanelLink®

PanelLink®

SiI 1390/1930/1368 Features

PanelLink/HDCP Transmitters

Industry-Standard Compliance

- DVI 1.0
- HDMI 1.1 (SiI 1390/1930)
- EIA/CEA-861B
- HDCP 1.1
- SDVO 1.0 (SiI 1368/1390)

Digital Video Inputs

Part	Video Input
SiI 1390	SDVO (1-2 GHz)
SiI 1930	TMDS (0.25-1.65 GHz)
SiI 1368	SDVO (1-2 GHz)

(For applications requiring a DVO input, please contact your Silicon Image sales representative for further information)

Digital Video Outputs


- Integrated PanelLink core supporting cables over 10 meters
- **SiI 1390/1930:**
 - 25-165 MHz HDMI output
 - Supports DTV (480i-1080p) and PC (VGA-UXGA) resolutions
- **SiI 1368**
 - 25-165 MHz DVI HDCP output
 - Supports DTV (480p-1080p) and PC (VGA-UXGA) resolutions
- Integrated RGB ↔ YCbCr color space conversion
- 4:4:4 ↔ 4:2:2 converter

Digital Audio

- Supports 8 channels at 192 kHz (including DVD-Audio) through HD-Audio input
- Supports IEC60958 2-channel PCM or IEC61937 compressed audio (Dolby Digital, DTS, etc.)
- Industry-standard HD-Audio, S/PDIF or 3xI²S inputs

Part Number - SiI1390CTU: SDVO input, HDMI output
SiI1930CTU: TMDS input, HDMI output
SiI1368CTU: SDVO input, DVI HDCP output

©2005 Silicon Image, Inc. All rights reserved. Silicon Image, the Silicon Image logo, SiI, SiI 1390, SiI 1930, SiI 1368, PanelLink, the PanelLink logo and TMDS are trademarks or registered trademarks of Silicon Image, Inc. in the United States and other countries. Other trademarks are the property of their respective holders. Product specifications are subject to change without notice. Printed in the U.S.A. 2/05 SiI PB-0054

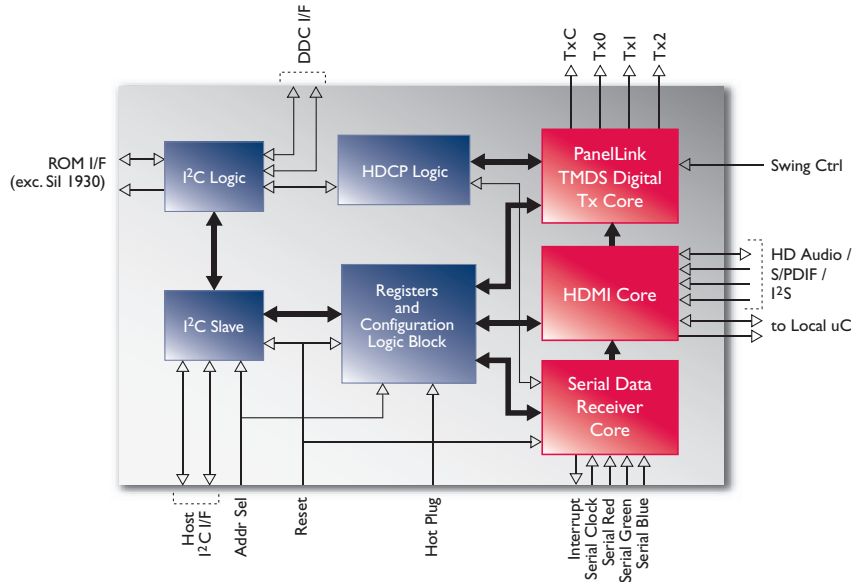

Content Protection

- Integrated HDCP cipher engine
- HDCP repeater function support with on-chip SHA-1 logic for high security
- Pre-programmed HDCP keys
 - Simplify manufacturing process
 - Most secure solution available
 - Lower system, manufacturing costs
- Encrypts both video and audio
 - SiI 1368: video encryption only
 - SiI 1390/1930: video and audio encryption available

System Operation

- Advanced technology for synchronizing video and audio streams without requiring direct communication between graphics and audio drivers
- Separate I²C slave interface for direct microcontroller access to internal registers
- Dual I²C pass-through interfaces for host I²C access of EDID (via DDC) and configuration EEPROM (for SiI 1368/1390 using SDVO)
- Flexible interrupt registers with interrupt pin
- Monitor-detection support through hot plug and receiver detection

Power Management

- Low-power 1.8V core operation
- Low-power standby mode
- Flexible power-down modes

SiI 1390 Starter Kit (CPI1390HDMI)

- SiI 1390 ADD2 card
 - For desktop PC motherboards with integrated graphics chipset supporting SDVO and available x16 PCI Express slot
 - Requires available S/PDIF or HD-Audio interconnection from motherboard or sound card
- User's Guide
- Schematics
- Bill of Materials (BOM)

SiI 1930 Starter Kit (CPI1930HDMI)

- SiI 1930 add-in graphics card adapter
 - For graphics card with DVI connector output
 - Requires available S/PDIF or HD-Audio interconnection from motherboard or sound card
- User's Guide
- Schematics
- Bill of Materials (BOM)

SiI 1368 Starter Kit (CPI1368DVI)

- SiI 1368 ADD2 card
 - For desktop PC motherboards with integrated graphics chipset supporting SDVO and available x16 PCI Express slot
- User's Guide
- Schematics
- Bill of Materials (BOM)



Silicon Image, Inc.
 1060 E. Arques, Sunnyvale, CA 94085
 T 408.616.4000 F 408.830.9530
 www.siliconimage.com