


A14

Ordering Information

1. Series	A14	1C	C	Q	12VDC
A14					
2. Contact Arrangement					
1A = SPST N.O.					
1C = SPDT					
3. Sealing Option					
C = Dust Cover					
4. Termination Options					
Q = Quick Connect					
5. Coil Voltage					
12VDC					
24VDC					
6. Coil Suppression					
Blank = 680Ω for 12VDC; 2700Ω for 24VDC					
D = Diode (1N4005)					
2D = 2 Diodes (1N4005)					
**Consult factory if other values are needed					

Dimensions


Units = mm

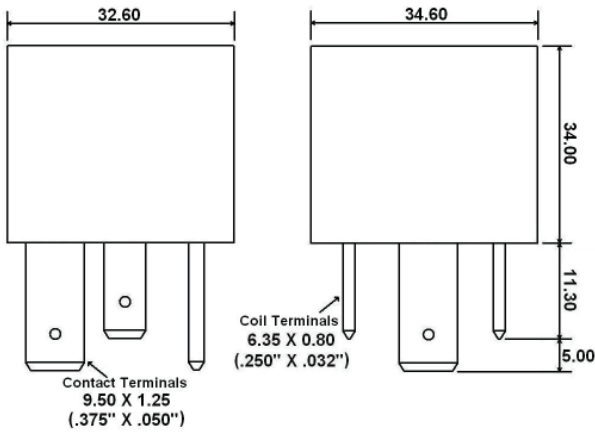


** We recommend the PR Series socket from Custom Connector Corporation

Schematics


Bottom Views



1A



1C



Dimensions shown in mm. Dimensions are shown for reference purposes only.

Specifications and availability subject to change without notice.