


Features

- Low Turn-on Voltage
- Fast Switching
- PN Junction Guard Ring for Transient and ESD Protection
- Ultra-Small Surface Mount Package


Mechanical Data

- Case: SOT-523, Molded Plastic
- Case material - UL Flammability Rating 94V-0
- Moisture sensitivity: Level 1 per J-STD-020A
- Terminals: Solderable per MIL-STD-202, Method 208
- Polarity: See Diagrams Below
- Marking: See Diagrams Below & Page 2
- Weight: 0.002 grams (approx.)
- Ordering Information, see Page 2

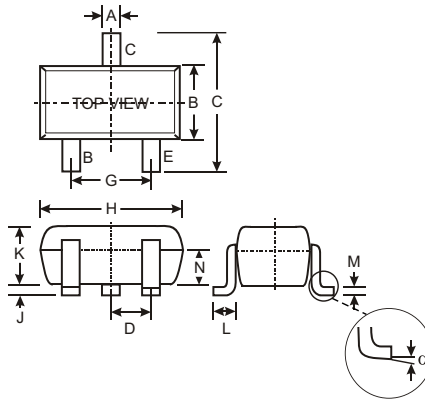


| SOT-523 | | | |
|----------|------|------|------|
| Dim | Min | Max | Typ |
| A | 0.15 | 0.30 | 0.22 |
| B | 0.75 | 0.85 | 0.80 |
| C | 1.45 | 1.75 | 1.60 |
| D | — | — | 0.50 |
| G | 0.90 | 1.10 | 1.00 |
| H | 1.50 | 1.70 | 1.60 |
| J | 0.00 | 0.10 | 0.05 |
| K | 0.60 | 0.80 | 0.75 |
| L | 0.10 | 0.30 | 0.22 |
| M | 0.10 | 0.20 | 0.12 |
| N | 0.45 | 0.65 | 0.50 |
| α | 0° | 8° | — |


All Dimensions in mm




BAS70T Marking: 7C



BAS70-04T Marking: 7D



BAS70-05T Marking: 7E



BAS70-06T Marking: 7F

Maximum Ratings and Electrical Characteristics, Single Diode @ $T_A = 25^\circ\text{C}$ unless otherwise specified

| Characteristic | Symbol | Value | Unit |
|--|---------------------------------|-------------|---------------------------|
| Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage | V_{RRM} V_{RWM} V_R | 70 | V |
| RMS Reverse Voltage | $V_{R(RMS)}$ | 49 | V |
| Forward Continuous Current (Note 1) | I_{FM} | 70 | mA |
| Non-Repetitive Peak Forward Surge Current @ $t_p < 1.0\text{s}$ | I_{FSM} | 100 | mA |
| Power Dissipation (Note 1) | P_d | 150 | mW |
| Thermal Resistance Junction to Ambient Air (Note 1) | $R_{\theta JA}$ | 833 | $^\circ\text{C}/\text{W}$ |
| Operating Temperature Range | T_j | -55 to +125 | $^\circ\text{C}$ |
| Storage Temperature Range | T_{STG} | -65 to +150 | $^\circ\text{C}$ |

Electrical Ratings @ $T_A = 25^\circ\text{C}$ unless otherwise specified


| Characteristic | Symbol | Min | Max | Unit | Test Condition |
|------------------------------------|-------------|-----|-------------|------|--|
| Reverse Breakdown Voltage (Note 2) | $V_{(BR)R}$ | 70 | — | — | $I_R = 10\mu\text{A}$ |
| Forward Voltage (Note 2) | V_F | — | 410 1000 | mV | $t_p < 300\mu\text{s}$, $I_F = 1.0\text{mA}$ $t_p < 300\mu\text{s}$, $I_F = 15\text{mA}$ |
| Leakage Current (Note 2) | I_R | — | 100 | nA | $t_p < 300\mu\text{s}$, $V_R = 50\text{V}$ |
| Total Capacitance | C_T | — | 2.0 | pF | $V_R = 0\text{V}$, $f = 1.0\text{MHz}$ |
| Reverse Recovery Time | t_{rr} | — | 5.0 | ns | $I_F = I_R = 10\text{mA}$ to $I_R = 1.0\text{mA}$, $I_{rr} = 0.1 \times I_R$, $R_L = 100\Omega$ |

- Notes:
1. Device mounted on FR-4 PC board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
 2. Short duration test pulse used to minimize self-heating effect.

Ordering Information (Note 3)

| Device | Packaging | Shipping |
|-------------|-----------|------------------|
| BAS70T-7 | SOT-523 | 3000/Tape & Reel |
| BAS70-04T-7 | SOT-523 | 3000/Tape & Reel |
| BAS70-05T-7 | SOT-523 | 3000/Tape & Reel |
| BAS70-06T-7 | SOT-523 | 3000/Tape & Reel |

Notes: 3. For Packaging Details: go to our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

Marking Information

XX = Product Type Marking Code (See Page 1, e.g. 7C = BAS70T)
 YM = Date Code Marking
 Y = Year (ex: N = 2002)
 M = Month (ex: 9 = September)

Date Code Key

| Year | 2002 | 2003 | 2004 | 2005 | 2006 | 2007 | 2008 | 2009 |
|------|------|------|------|------|------|------|------|------|
| Code | N | P | R | S | T | U | V | W |

| Month | Jan | Feb | March | Apr | May | Jun | Jul | Aug | Sep | Oct | Nov | Dec |
|-------|-----|-----|-------|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| Code | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | O | N | D |