


Soberton Inc.


EM9752N

Noise Canceling Electret Condenser Microphone

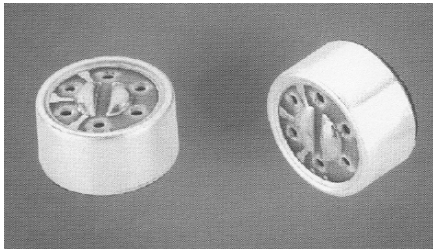


Sensitivity	0dB = 1V/Pa. 1KHz
Directivity	Noise Canceling
Impedance	Low Impedance
Current Consumption	Max. 0.5mA
Standard Operation Voltage	1.5V
Sensitivity Reduction	Within -3dB at 1V
S/N Ratio	More than 58dB
Sensitivity Range	-51± 4dB, -54 ± 4dB

Typical Frequency Response Curve:

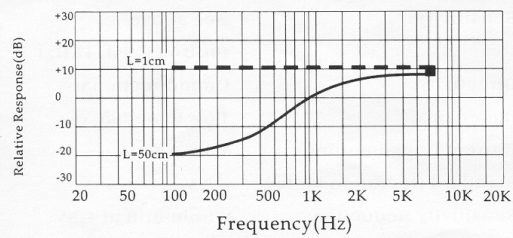

Schematic Diagram:

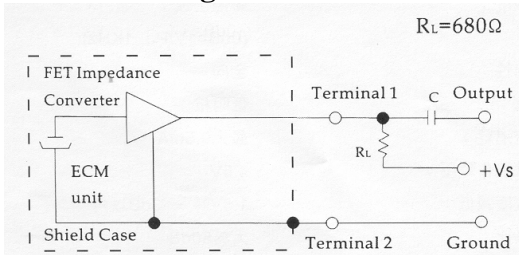

EM9752N

