


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

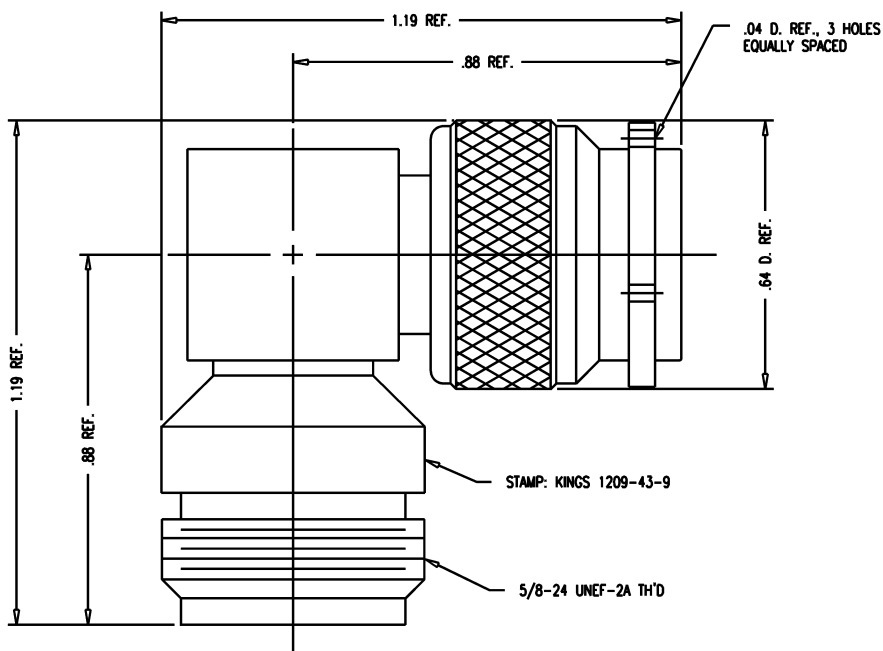

- NOTES:
1. INTERFACE PER MIL-STD-348, FIG. 304-2 AND FIG. 313.1.
  2. MATERIALS:  
 INSULATORS: TEFLON, ASTM-D-4894  
 C-RINGS: PHOSPHOR BRONZE, QQ-B-750  
 GASKET: SILICONE RUBBER, ZZ-R-765  
 ANG. CONTACT (F) } BER. COPPER, ASTM-B-196  
 OUTER CONTACT }  
 ALL OTHER METAL PARTS: BRASS, QQ-B-626

3. FINISHES:  
 CENTER CONTACTS: HARD GOLD PLATE, PER MIL-C-45204  
 ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT FINISH (TR-5)
4. ELECTRICAL CHARACTERISTICS:  
 NOMINAL IMPEDANCE: 50 OHMS  
 WORKING VOLTAGE: 500 VRMS  
 FREQUENCY RANGE: DC TO 11 GHz.

GSD

1209-43-9

REVISIONS	
ISSUE	CHANGES
0	ER 31145 KH 09/19/89
1	CN 38226 C BDH 02/26/01

SCALE 4:1	
APPROX SURFACE AREA	
USED ON	
REF: BOEING	
ADAPTER, F-M, ANGLE, N-TNC	
DRAWN KH	DATE 04/13/94
DESIGN MJB	DATE 04/14/94
APPR.	DATE

**KINGS**  
 ELECTRONICS CO., INC.  
 ROCK HILL, SOUTH CAROLINA 29730  
 1209-43-9

GSD