


DASH NO. M CODE MADE FROM

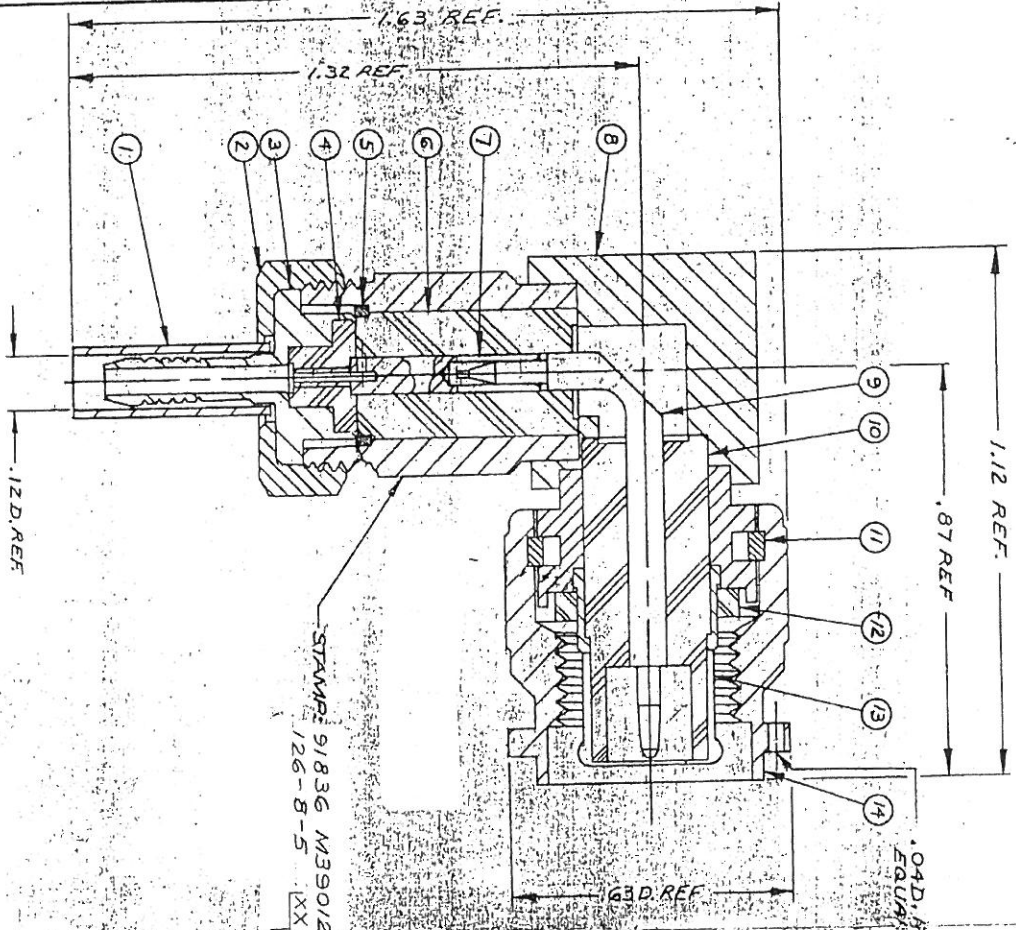

UNLESS OTHERWISE SPECIFIED:
 1. TOLERANCES: FRACTIONS & PLACE DECIMALS & DIM.
 3 PLACE DECIMALS * ONLY OF ANY 2 DIAMETERS MAY
 VARY BY .0015 IN. TOTAL. THE SUM OF THEIR TOLERANCES
 NOT EXCEED THE SUM OF THEIR TOLERANCES.

2. REMOVE ALL BURRS, BREAK SHARP EDGES .005 MAX.
 3. NO FILLETS PERMITTED.
 4. SURFACE ROUGHNESS 63 MICRONS INCHES RMS MAX.
 5. ALL DIMENSIONS PRIOR TO PLATING.
 6. ALL PLATING IN ACCORDANCE WITH MIL 10001.

STAMP: 9183G M39012/30-0022
 126-8-5 XX XX

DATE CODE

1. FOR USE WITH MIL/ITT-ERG 174 AND
 MIL/TT-3-RG 316 CABLES.
 2. FOR CABLE TRIMMING USE KIT
 KTD-245.
 3. FOR CRIMPING USE DIE SIZE 11.

.04 D REF. 3 HOLES
 EQUALLY SPACED

M39012/30-0022 (SHT 1 OF 2)

REV	CHANGES	REVISIONS
0	ER 26172	
1	SD 4 JUNE 84	
	CN 32302 A	
	LNW 20 JUN 90	

SCALE: 4:1

APPROX. SURFACE AREA: _____

USED ON: _____

REF: _____

TNG ANGLE PLUG

DRAWN: SD DATE 4 JUNE

APP: JMW DATE 5 JUN

EKINGS
 TECHNICAL SERVICES

M39012/30-0022 (SHT 1 OF 2)

SD

ITEM	REQ'D	DESCRIPTION	PART NO.
1	1	K-GRIP SLEEVE	A-19-147-1-MC7
2	1	HEX NUT	
3	1	K-GRIP	
4	1	INSULATOR	
5	1	RETAINING RING	
6	1	INSULATOR	
7	1	TNC CONTACT	1-3175-3M9D
8	1	BODY ASS'Y	
9	1	TNC ANGLE CONTACT M-M	
10	1	INSULATOR	
11	1	C-RING	
12	1	GASKET	
13	1	OUTER CONTACT	
14	1	COUPLING NUT	
15	1	SOLDER PREFORM	
16	1	CABLING INSTRUCTIONS	3-189-2M88

M39012/30-0022
(SHEET 2 OF 2)

REVISIONS

REV. NO.	CHANGES
0	ER 26172
1	SD 1 JUNE 84
2	CN 32302 A
3	LNM 20 JUN 90

SD

126-8-5

USED ON:

REF:

FINISH SPEC. KER 10004

PARTS LIST

DRAWN SD DATE 1 JUNE 84
 APPR. M/W DATE 5 JUN 84

BEKINGS
 ELECTRONICS CO., INC.
 NORWALK, NEW YORK 10601

M39012/30-0022
(SHEET 2 OF 2)