


This document was generated on 05/25/2010 PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Deut Maurele eur			
Part Number:	<u>0702462601</u>		
Status:	Active		
Overview:			
	cgrid sl_products		
Description:		C-Grid® Header, Low Profile, Dual Row, Vertical, Shrouded, 26	
	Circuits, 0.38µm (15µ'	') Gold (Au) Selective Plating, Tin (Sn) PC Tail Plating	
Documents:			
3D Model		RoHS Certificate of Compliance (PDF)	
Drawing (PDF)		······································	
<u></u>			Series
Agency Certifica	tion		image - Reference only
CSA		LR19980	
UL		E29179	EU RoHS China RoHS
UL		E29179	ELV and RoHS
General			Compliant
		DOD Lloaders	
Product Family		PCB Headers	REACH SVHC
Series		<u>70246</u>	Contains SVHC: No
Application		Wire-to-Board	Halogen-Free
Overview		cgrid sl products	Status
Product Name		C-Grid®	Not Halogen-Free
			Need more information on product
Physical			environmental compliance?
Breakaway		No	
Circuits (Loaded)		26	Email productcompliance@molex.com
Circuits (maximum)		26	For a multiple part number RoHS Certificate of
First Mate / Last Brea	ak	No	Compliance, <u>click here</u>
Flammability		94V-0	
Glow-Wire Compliant	t	No	Please visit the <u>Contact Us</u> section for any
Guide to Mating Part		No	non-product compliance questions.
Keying to Mating Par		None	
Lock to Mating Part		None	
Material - Plating Mat	ting	Gold	
			Search Parts in this Series
Material - Plating Ter	mination	Tin	70246Series
Number of Rows		2	
Orientation		Vertical	
PC Tail Length (in)		0.135 In	Mates With
PC Tail Length (mm)		3.43 mm	<u>70450</u> SL [™] Crimp Housing, <u>70058</u> SL [™]
PCB Locator		No	Crimp Terminal
PCB Retention		None	
PCB Thickness Reco		0.062 In	
PCB Thickness Reco	ommended (mm)	1.60 mm	
Packaging Type		Tray	
Pitch - Mating Interfac	ce (in)	0.100 In	
Pitch - Mating Interfac		2.54 mm	
Pitch - Term. Interfac	()	0.100 ln	
Pitch - Term. Interfac		2.54 mm	
Plating min: Mating (15.2	
Plating min: Mating (0.38	
Plating min: Terminat		75.2	
Plating min: Terminat		1.88	
Polarized to Mating P	้อน	Center Slot	
Polarized to PCB		No	
Shrouded		Fully	
Stackable		No	
Surface Mount Comp		No	
Temperature Range ·	 Operating 	-55°C to +120°C	

Termination Interface: Style	Through Hole
Electrical Current - Maximum per Contact Voltage - Maximum	2.5A 250V DC
Solder Process Data Duration at Max. Process Temperature (seconds) Lead-free Process Capability Max. Cycles at Max. Process Temperature Process Temperature max. C	10 Wave Capable (TH only) 1 265
Material Info	
Reference - Drawing Numbers	

Packaging Specification Sales Drawing PK-87835-001 SDA-70246-**20-25,39

This document was generated on 05/25/2010 PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

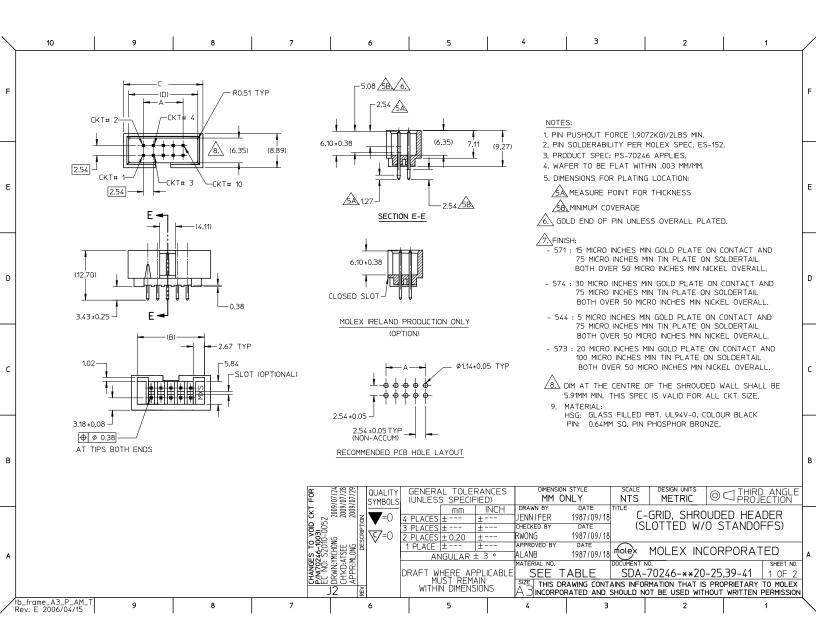

$\overline{\}$	10			9		8		7		6	5		4	3	2		1	
F	PART	СКТ	VOID	DIM	DIM	DIM	DIM	VOID CKT, ONLY										
	NUMBER	SIZE	CKT	A	В	С	D	TO PLATING	CODE									
	70246-08**	08	-	7.62	14.73	17.78	15.24	-						LEGEND:				F
	70246-10**	10 12	-	10.16	17.27	20.32	17.78	-						70246 - * * * *				
	70246-12**	12		12.70	19.81	22.86	20.32						CKT	SIZE				
	70246-14** 70246-16**	14	-	15.24 17.78	22.35 24.89	25.40 27.94	22.86 25.40	-						LATING OPT.				
	70246-20**	20	-	22.86	29.97	33.02	30.48							FOR DETAIL				
-	70246-24**	24	-	27.94	35.05	38.10	35.56	-					• PART	PLATING OPTION				
-	70246-26**		-	30.48	37.59	40.64	38.10	-					A NUMBER					
	70246-30**	30	-	35,56	42.67	45.72	43.18	-					70246-**01	571				
E	70246-34**	34	-	40.64	47.75	50.80	48.26	-		-			70246-**02					Е
	70246-40**	40	-	48.26	55.37	58.42	55.88	-					70246-**04	544				
	70246-44**	44	-	53.34	60.45	63.50	60.96	-					70246-**12					
	70246-50**	50	-	60.96	68.07	71.12	68.58	-						5.5				
	70246-56**	56	-	68.58	75.69	78.74	76.20	-										
	70246-60**	60	-	73.66	80.77	83.82	81.28	-										
	70246-64**	64	-	78.74	85.85	88.90	86.36	-										
D	70246-72**	72	-	88.90	96.01	99.06	96.52	-										D
	70246-25**	26	26	30.48	37.59	40.64	38.10	-										
	70246-1003	10	10	10.16	17.27	20.32	17.78	571										
с																		с
в									FOR 07/24		GENERAL T((UNLESS SP			SION STYLE SC ONLY N	ALE DESIGN UNITS			В
A									CHANGES TO VOID CKT FOR PUNTO246-1003) CLONO: SZ010-0052 DRWN:YMCHONG 2009/07/24		PLACES ± PLACES ± PLACES ± 0.2 PLACES ± 0.2 1 PLACE ±	m INC - ± 20 ± - ± AR ± 3 °	H DRAWN BY JENN I FER CHECKED BY RWONG APPROVED BY ALANB MATERIAL NO ABLE SIZE THIS	DATE 1987/09/18 DATE 1987/09/18 DATE 1987/09/18 TABLE DRAWING CONTAINS	C-GRID, SHROU (SLOTTED W/C	JDED HEA STANDOF ORPORAT 25,39-41	DER FS) ED SHEET NO. 2 OF 2	A
	o_frame_A3_F ev. E 2006/0		Т	9		8		7		6	5		4	3	2		1	\searrow