



**FEATURES:**

- RoHS Compliant
- Wide 2:1 input range
- High Efficiency up to 83%
- Continuous short circuit
- Operating Temperature -40°C to 85°C
- Input / Output Isolation of 500VAC
- No Tantalum capacitors used inside
- Over voltage protection



**Models**  
**Dual output**

Model	Input Voltage (V)	Output Voltage (V)	Output Current max (mA)	Isolation (VAC)	Efficiency (%)
AM2Q-0512DZ	4.5-9	±12	±65	500	82
AM2Q-0515DZ	4.5-9	±15	±50	500	81
AM2Q-1212DZ	9-18	±12	±65	500	83
AM2Q-1215DZ	9-18	±15	±50	500	83
AM2Q-2412DZ	18-36	±12	±65	500	81
AM2Q-2415DZ	18-36	±15	±50	500	82
AM2Q-4812DZ	36-75	±12	±65	500	80
AM2Q-4815DZ	36-75	±15	±50	500	79

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified.

**Input Specifications**

Parameters	Nominal	Typical	Maximum	Units
Voltage range	5	4.5-9	4.5-9	VDC
	12	9-18	9-18	
	24	18-36	18-36	
	48	36-75	36-75	
Filter	LC Type			
Start up time		20		ms
No Load Input Current		30		mA
Input reflected current		20		mA

**Isolation Specifications**

Parameters	Conditions	Typical	Rated	Units
Tested I/O voltage	3sec		500	VAC
Resistance		50		MOhm
Capacitance		500		pF

**Output Specifications**

Parameters	Conditions	Typical	Maximum	Units
Voltage accuracy		±1		%
Cross Regulation (Dual Output Models)	25% load on one output – 100% load on the other output	±5		%
Over voltage protection	Zener Diode Clamp	±12	±15	V
		±15	±18	
Short Circuit protection	Continuous			
Short circuit restart	Auto Recovery			
Line voltage regulation (Dual)	LL-HL	±0.5		% of Vin
Load voltage regulation (Dual)	Load:0-100% unbalanced	±1		%
Temperature coefficient		±0.02		%/°C
Ripple & Noise	20MHz Bandwidth	50		mV p-p
Minimum Load Current		0		% of Max

## General Specifications

Parameters	Conditions	Typical	Maximum	Units
Switching frequency	100% load	100		KHz
Operating temperature	Derating above 60°C		-40 to +85	°C
Storage temperature		-40 to +125		°C
Maximum case temperature			100	°C
Cooling		Free Air Convection		
Humidity			95	% RH
Case material		Nickel Coated Copper		
Weight		10		g
Dimensions (L x W x H)		1.08 x 0.70 x 0.28 inches	27.50 x 18.00 x 7.00 mm	
MTBF		>1.6Mhrs ( MIL-HDBK -217F, Ground Benign, t=+25°C )		
Transient recovery deviation		±3		%


## Safety Specifications

Parameters	
Standards	Designed to meet IEC/EN 60950-1


## Pin Out Specifications

Pin	500 VAC Dual
1	-V Input
2	+V Input
3	+V Output
4	Common
5	-V Output

## Dimensions

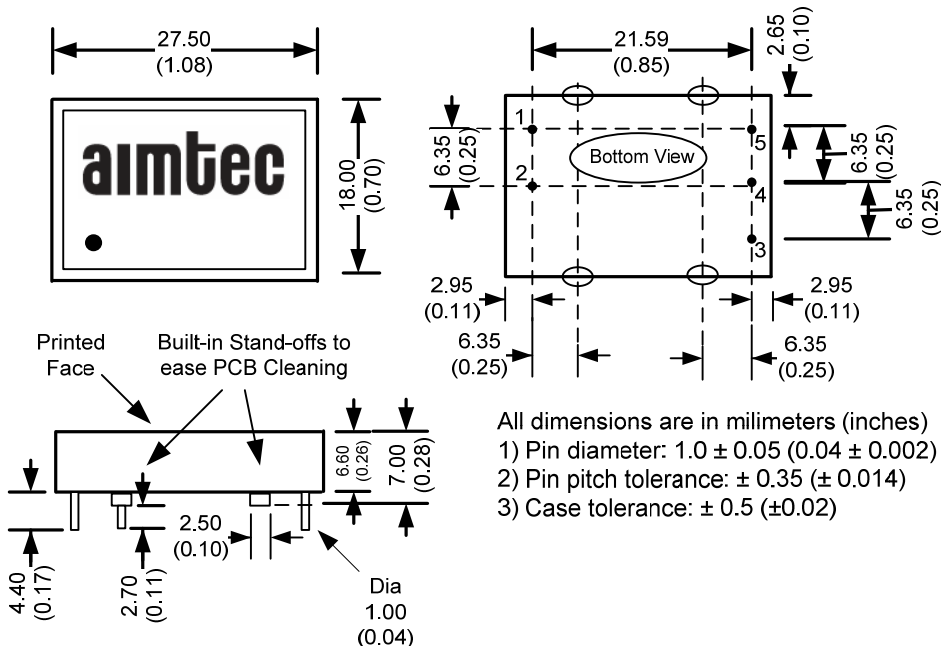

**Derating**

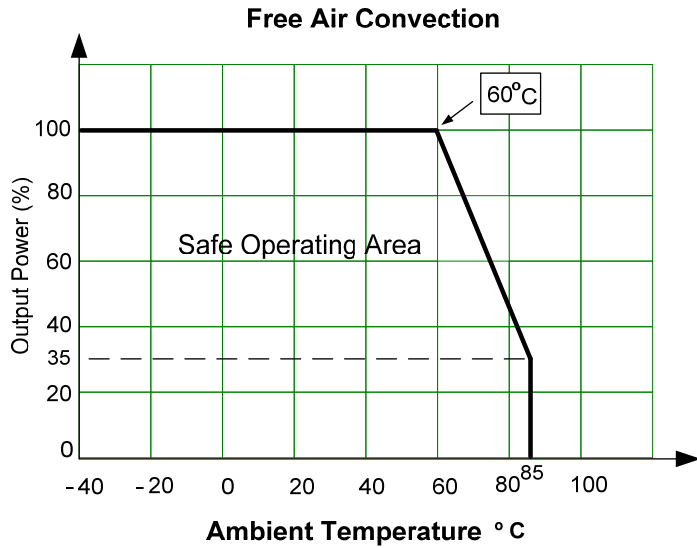

**NOTE:** **1.** Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to [www.aimtec.com](http://www.aimtec.com) for the most current product specifications. **2.** Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. **3.** Mechanical drawings and specifications are for reference only. **4.** All specifications are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified. **5.** Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. **6.** This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other the ones listed in this datasheet. **7.** Warranty is in accordance with Aimtec's standard Terms of Sale available at [www.aimtec.com](http://www.aimtec.com).