

Aluminum Capacitors Axial, Smallest Diameter


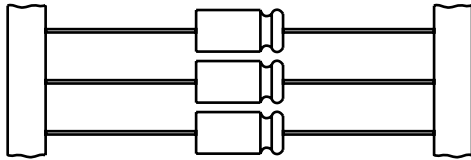


Fig.1 Component outlines



QUICK REFERENCE DATA	
DESCRIPTION	VALUE
Nominal case sizes ($\varnothing D \times L$ in mm)	3.3 x 8 and 3.3 x 11
Rated capacitance range, C_R	0.47 to 22 μF
Tolerance on C_R	- 10 to + 50 % (± 20 % to special order)
Rated voltage range, U_R	6.3 to 63 V
Category temperature range	- 40 to 85 $^{\circ}\text{C}$
Endurance test at 85 $^{\circ}\text{C}$	1500 hours
Useful life at 85 $^{\circ}\text{C}$	2000 hours
Useful life at 40 $^{\circ}\text{C}$, 1.4 I_R applied	60 000 hours
Shelf life at 0 V, 85 $^{\circ}\text{C}$	500 hours
Based on sectional specification	IEC 60384-4/EN130300
Climatic category IEC 60068	40/085/56

FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte
- Axial leads, cylindrical aluminum case, insulated with a blue sleeve
- Taped for automatic insertion
- Charge and discharge proof
- Ultra miniature, diameter 3.3 mm
- Lead (Pb)-free versions are RoHS compliant



APPLICATIONS


- General purpose, low profile and lightweight equipment
- Smoothing, filtering, buffering, decoupling, timing
- Boards with restricted mounting height

MARKING

The capacitors are marked (where possible) with the following information:

- Rated capacitance (in μF)
- Rated voltage (in V)
- Date code, in accordance with IEC 60062
- Code for factory of origin
- Name of manufacturer
- Band to indicate the negative terminal
- Series number (117)

SELECTION CHART FOR C_R , U_R AND RELEVANT NOMINAL CASE SIZES ($\varnothing D \times L$ in mm)						
C_R (μF)	U_R (V)					
	6.3	10	16	25	40	63
0.47	→	→	→	→	→	3.3 x 8
1.0	→	→	→	→	→	3.3 x 8
2.2	→	→	→	→	3.3 x 8	3.3 x 11
3.3	→	→	→	3.3 x 8	→	3.3 x 11
4.7	→	→	3.3 x 8	→	3.3 x 11	-
6.8	→	3.3 x 8	→	3.3 x 11	-	-
10	3.3 x 8	-	3.3 x 11	-	-	-
22	3.3 x 11	-	-	-	-	-

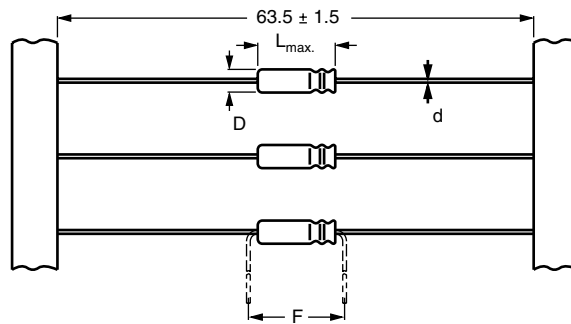DIMENSIONS in millimeters **AND AVAILABLE FORMS**


Form BR: Taped on reel
 Form BA: Taped in box
 Case $\varnothing D \times L = 3.3 \times 8$ mm and 8×11 mm

Fig.2 Components insulated with a blue plastic sleeve

Table 1

AXIAL; DIMENSIONS in millimeters, MASS AND PACKAGING QUANTITIES								
NOMINAL CASE SIZE $\varnothing D \times L$	CASE CODE	AXIAL: FORM BA AND BR				MASS (g)	PACKAGING QUANTITIES	
		$\varnothing d$	$\varnothing D_{max.}$	$L_{max.}$	F_{min}		FORM BA	FORM BR
3.3 x 8	1a	0.6	3.5	9	12.5	≈ 0.3	1000	4000
3.3 x 11	1	0.6	3.5	12	15	≈ 0.35	1000	4000

Note

1. Detailed tape dimensions see section 'PACKAGING'.

ELECTRICAL DATA	
SYMBOL	DESCRIPTION
C_R	rated capacitance at 100 Hz, tolerance - 10 to + 50 %
I_R	rated RMS ripple current at 100 Hz , 85 °C
I_{L5}	max. leakage current after 5 minutes at U_R
$\tan \delta$	max. dissipation factor at 100 Hz
Z	max. impedance at 10 kHz

ORDERING EXAMPLE

Electrolytic capacitor 117 series
 10 μF /16 V; - 10/+ 50 %
 Nominal case size: $\varnothing 3.3 \times 11$ mm; Form BA
 Former 12NC: 2222 117 35109
 Ordering code: MAL211735109E3

Note

 Unless otherwise specified, all electrical values in Table 1 apply at $T_{amb} = 20$ °C, $P = 86$ to 106 kPa, $RH = 45$ to 75 %.

Table 1

ELECTRICAL DATA AND ORDERING INFORMATION								
U_R (V)	C_R 100 Hz (μF)	NOMINAL CASE SIZE $\varnothing D \times L$ (mm)	I_R 100 Hz 85 °C (mA)	I_{L5} 5 min (μA)	$\tan \delta$ 100 Hz	Z 10 kHz (Ω)	ORDERING CODE MAL2117.....	
							ON REEL FORM BR	IN BOX FORM BA
6.3	10	3.3 x 8	11	3	0.30	20	23109E3	33109E3
	22	3.3 x 11	20	3	0.30	9	23229E3	33229E3
10	6.8	3.3 x 8	10	3	0.25	24	24688E3	34688E3
	4.7	3.3 x 8	9	3	0.20	26	25478E3	35478E3
16	10	3.3 x 11	16	3	0.20	12	25109E3	35109E3
	3.3	3.3 x 8	8	3	0.18	27	26338E3	36338E3
25	6.8	3.3 x 11	14	3	0.18	13	26688E3	36688E3
	2.2	3.3 x 8	7	3	0.16	32	27228E3	37228E3
40	4.7	3.3 x 11	13	3	0.16	15	27478E3	37478E3
	0.47	3.3 x 8	4	3	0.10	120	28477E3	38477E3
63	1	3.3 x 8	6	3	0.12	55	28108E3	38108E3
	2.2	3.3 x 11	11	3	0.14	25	28228E3	38228E3
	3.3	3.3 x 11	13	3	0.14	17	28338E3	38338E3



ADDITIONAL ELECTRICAL DATA		
PARAMETER	CONDITIONS	VALUE
Voltage		
Surge voltage		$U_s \leq 1.15 \times U_R$
Reverse voltage		$U_{rev} \leq 1 \text{ V}$
Current		
Leakage current	After 1 minute at U_R	$I_{L1} \leq 0.02 C_R \times U_R + 3 \mu\text{A}$
	After 5 minutes at U_R	$I_{L5} \leq 0.002 C_R \times U_R + 3 \mu\text{A}$
Inductance		
Equivalent series inductance (ESL)	Case $\varnothing D \times L = 3.3 \times 8 \text{ mm}$	typ. 13 nH
	Case $\varnothing D \times L = 3.3 \times 11 \text{ mm}$	typ. 15 nH
Resistance		
Equivalent series resistance (ESR)	Calculated from $\tan \delta_{max}$ and C_R (see Table 1)	$ESR = \tan \delta / 2 \pi f C_R$

RIPPLE CURRENT AND USEFUL LIFE

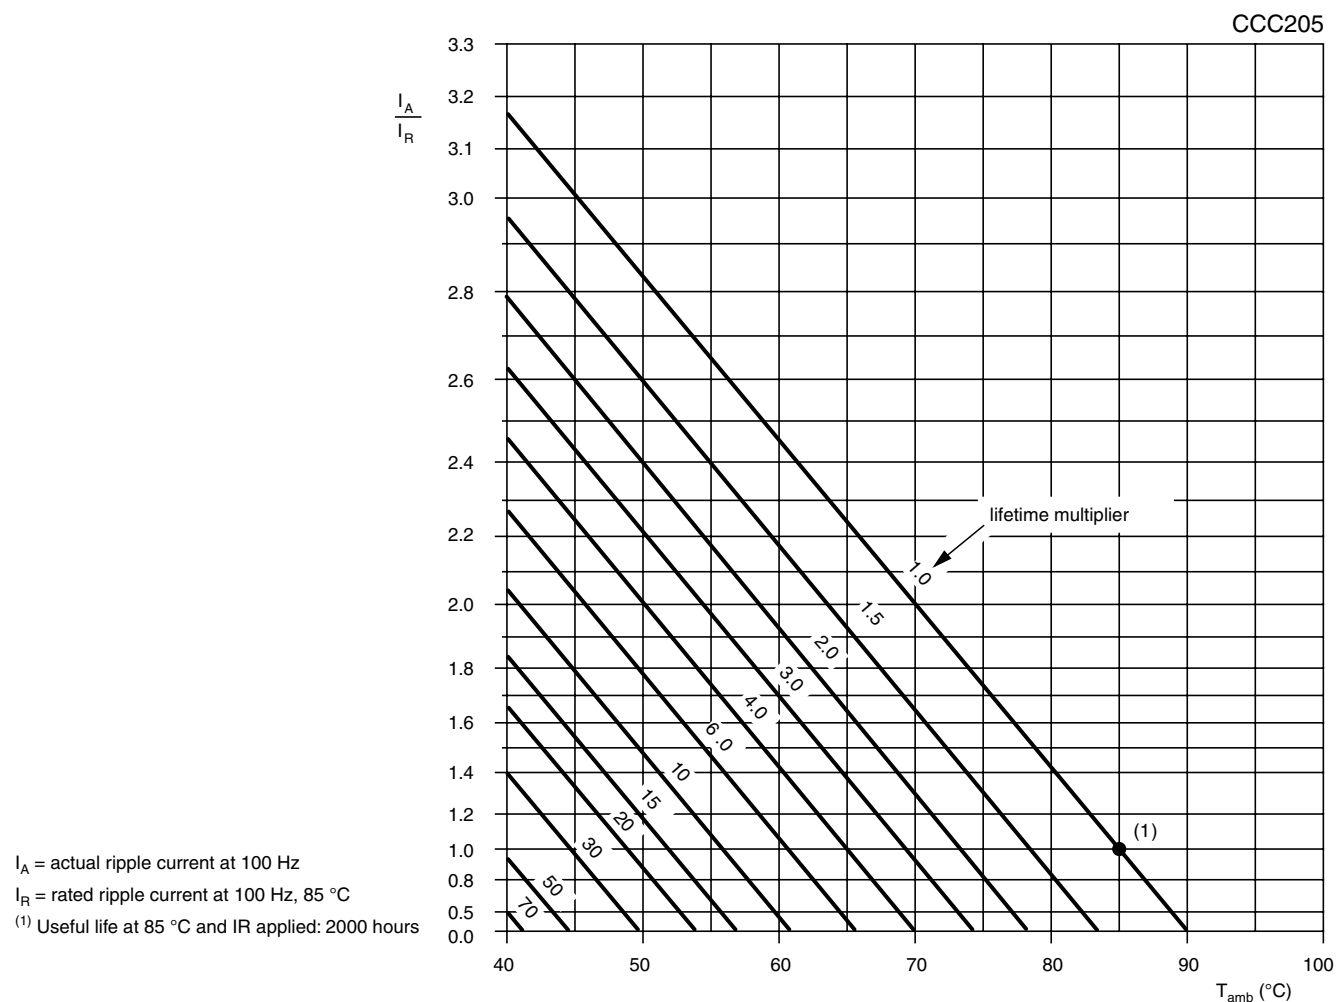


Fig.3 Multiplier of useful life as a function of ambient temperature and ripple current load

Table 2

MULTIPLIER OF RIPPLE CURRENT (I_R) AS A FUNCTION OF FREQUENCY			
FREQUENCY (Hz)	I_R MULTIPLIER		
	$U_R = 6.3$ to 16 V	$U_R = 25$ to 40 V	$U_R = 63$ V
50	0.80	0.75	0.70
100	1.00	1.00	1.00
300	1.20	1.30	1.55
1000	1.35	1.55	1.90
3000	1.45	1.70	2.30
$\geq 10\ 000$	1.50	1.80	2.50

Table 3

TEST PROCEDURES AND REQUIREMENTS			
TEST		PROCEDURE (quick reference)	REQUIREMENTS
Name of test	Reference		
Endurance	IEC 60384-4/ EN130300 subclause 4.13	$T_{amb} = 85$ °C; U_R applied; 1500 hours	$\Delta C/C: \pm 20$ % $\tan \delta \leq 2$ x spec. limit $Z \leq 3$ x spec. limit $I_{L5} \leq$ spec. limit
Useful life	CECC 30301 subclause 1.8.1	$T_{amb} = 85$ °C; U_R and I_R applied; 2000 hours	$\Delta C/C: \pm 50$ % $\tan \delta \leq 3$ x spec. limit $Z \leq 3$ x spec. limit $I_{L5} \leq$ spec. limit no short or open circuit total failure percentage: ≤ 3 %
Shelf life (storage at high temperature)	IEC 60384-4/ EN130300 subclause 4.17	$T_{amb} = 85$ °C; no voltage applied; 500 hours after test: U_R to be applied for 30 minutes, 24 to 48 hours before measurement	$\Delta C/C, \tan \delta, Z:$ for requirements see 'Endurance test' above $I_{L5} \leq 2$ x spec. limit



Disclaimer

All product specifications and data are subject to change without notice.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

Vishay disclaims any and all liability arising out of the use or application of any product described herein or of any information provided herein to the maximum extent permitted by law. The product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein, which apply to these products.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications unless otherwise expressly indicated. Customers using or selling Vishay products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify Vishay for any damages arising or resulting from such use or sale. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.