
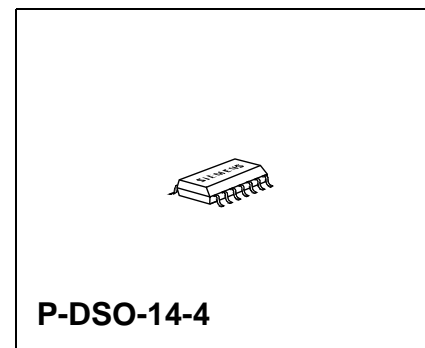


### Features

- Output voltage tolerance  $\leq \pm 2 \%$
- Low-drop voltage
- Very low standby current consumption
- Overtemperature protection
- Reverse polarity protection
- Short-circuit proof
- Settable reset threshold
- Watchdog
- Wide temperature range
- Suitable for use in automotive electronics

Type	Ordering Code	Package
TLE 4263 G	Q67006-A9095	P-DSO-20-6 (SMD)
▼ TLE 4263 GM	Q67006-A9357	P-DSO-14-4 (SMD)

▼ New type

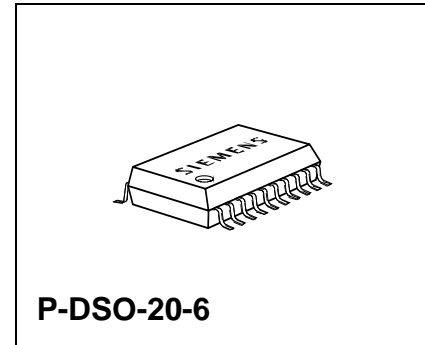

### Functional Description

TLE 4263 G is a 5-V low-drop voltage regulator in a P-DSO-20-6 SMD package. The maximum input voltage is 45 V. The maximum output current is more than 200 mA. The IC is short-circuit proof and incorporates temperature protection that disables the IC at overtemperature.

The IC regulates an input voltage  $V_I$  in the range of  $6 \text{ V} < V_I < 45 \text{ V}$  to  $V_{Q_{\text{rated}}} = 5.0 \text{ V}$ . A reset signal is generated for an output voltage of  $V_Q < 4.5 \text{ V}$ . This voltage threshold can be decreased to 3.5 V by external connection. The reset delay can be set externally by a capacitor. The integrated watchdog logic controls the connected microcontroller. The IC can be switched off via the inhibit input, which causes the current consumption to drop from 800  $\mu\text{A}$  to  $< 50 \mu\text{A}$ .



---

**Pin Definitions and Functions**

Pin	Symbol	Function
1, 2, 19, 13	N.C.	Not connected
3	QRES	<b>Reset output</b> ; open-collector output connected to the output via a resistor of 30 k $\Omega$ .
4-7, 14-17	GND	<b>Ground</b>
9	DRES	<b>Reset delay</b> ; connected to ground with a capacitor.
10	SRES	<b>Reset threshold</b> ; for setting the switching threshold connect with a voltage divider from output to ground. If this input is connected to GND, reset is triggered at an output voltage of 4.5 V.
11	W	<b>Watchdog</b> ; positive edge triggered input for monitoring a microcontroller.
12	$V_Q$	<b>5-V output voltage</b> ; block to ground with a 22- $\mu$ F capacitor.
18	$V_I$	<b>Input voltage</b> ; block to ground directly at the IC with a ceramic capacitor.
20	INH	<b>Inhibit</b> ; TTL-compatible, low-active input.



**Absolute Maximum Ratings** $T_j = -40$  to  $150$  °C

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		

**Input**

Input voltage	$V_I$	-42	45	V	-
Input current	$I_I$	-	-	-	internally limited

**Reset Output**

Voltage	$V_R$	-0.3	42	V	-
Current	$I_R$	-	-	-	internally limited

**Reset Input**

Reset threshold	$V_{RE}$	-0.3	6	V	-
-----------------	----------	------	---	---	---

**Reset Delay**

Voltage	$V_d$	-0.3	42	V	-
Current	$I_d$	-	-	-	internally limited

**Output**

Voltage	$V_Q$	-0.3	7	V	-
Current	$I_Q$	-	-	-	internally limited

**Inhibit**

Voltage	$V_e$	-42	45	V	-
---------	-------	-----	----	---	---

**Watchdog**

Voltage	$V_W$	-0.3	6	V	-
---------	-------	------	---	---	---

**Ground**

Current	$I_{GND}$	-0.5	-	A	-
---------	-----------	------	---	---	---

**Absolute Maximum Ratings** (cont'd) $T_j = -40$  to  $150$  °C

Parameter	Symbol	Limit Values		Unit	Remarks
		min.	max.		

**Temperature**

Junction temperature	$T_j$	–	150	°C	–
Storage temperature	$T_{stg}$	– 50	150	°C	–

**Operating Range**

Input voltage	$V_I$	–	45	V	–
Junction temperature	$T_j$	– 40	150	°C	–
Thermal resistance junction-ambient	$R_{th JA}$	–	70	K/W	soldered
junction-case	$R_{th JC}$	–	25	K/W	–

**Characteristics**

$V_i = 13.5\text{ V}$ ;  $T_j = 25\text{ °C}$ ;  $V_e > 3.5\text{ V}$ ; (unless specified otherwise)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		

**Normal Operation**

Output voltage	$V_Q$	4.90	5.00	5.10	V	$5\text{ mA} \leq I_Q \leq 150\text{ mA}$ ; $6\text{ V} \leq V_i \leq 28\text{ V}$ ; $-40\text{ °C} \leq T_j \leq 125\text{ °C}$
Output voltage	$V_Q$	4.95	5.00	5.05	V	$6\text{ V} \leq V_i \leq 32\text{ V}$ ; $I_Q = 100\text{ mA}$ ; $T_j = 100\text{ °C}$
Output current	$I_Q$	200	250	–	mA	–
Current consumption; $I_q = I_i - I_Q$	$I_q$	–	–	50	$\mu\text{A}$	$V_e = 0$
	$I_q$	–	800	1100	$\mu\text{A}$	$I_Q = 0\text{ mA}$
	$I_q$	–	10	15	mA	$I_Q = 150\text{ mA}$
	$I_q$	–	15	20	mA	$I_Q = 150\text{ mA}$ ; $V_i = 4.5\text{ V}$
Drop voltage	$V_{Dr}$	–	0.35	0.6	V	$I_Q = 150\text{ mA}^*)$
Load regulation	$\Delta V_Q$	–	–	25	mV	$I_Q = 5\text{ mA to }150\text{ mA}$
Supply-voltage regulation	$\Delta V_Q$	–	15	25	mV	$V_i = 6\text{ V to }28\text{ V}$ ; $I_Q = 150\text{ mA}$
Ripple rejection	$SVR$	–	54	–	dB	$f_r = 100\text{ Hz}$ ; $V_r = 0.5\text{ Vpp}$

**Reset Generator**

Switching threshold	$V_{RT}$	4.2	4.5	4.8	V	$V_{RE} = 0\text{ V}$
Switching voltage	$V_{RE}$	1.28	1.35	1.42	V	$V_Q > 3.5\text{ V}$
Reset low voltage	$V_R$	–	0.10	0.40	V	$I_R = 1\text{ mA}$

**Note:** The reset output is low within the range  $V_Q = 1\text{ V}$  to  $V_{RT}$

<sup>\*)</sup> Drop voltage =  $V_i - V_Q$  (measured when the output voltage has dropped 100 mV from the nominal value obtained at 13.5 V input)

**Characteristics** (cont'd)

$V_i = 13.5 \text{ V}$ ;  $T_j = 25 \text{ °C}$ ;  $V_e > 3.5 \text{ V}$ ; (unless specified otherwise)

Parameter	Symbol	Limit Values			Unit	Test Condition
		min.	typ.	max.		
Saturation voltage	$V_C$	–	50	100	mV	$V_Q < V_{RT}$
Delay switching threshold	$V_{dT}$	1.5	1.7	2.1	V	–
Switching threshold	$V_{ST}$	0.2	0.35	0.55	V	–
Charge current	$I_d$	40	60	80	$\mu\text{A}$	–
Delay time	$t_d$	–	2.8	–	ms	$C_d = 100 \text{ nF}$
Delay time	$t_t$	–	2	–	$\mu\text{s}$	$C_d = 100 \text{ nF}$

**Watchdog**


Discharge current	$I_{Cd}$	4.4	6.25	8.2	$\mu\text{A}$	$V_C = 1.5 \text{ V}$
Switching voltage	$V_{Cd}$	1.5	1.7	2.1	V	–
Pulse time	$T_W$	–	22.5	–	ms	$C_d = 100 \text{ nF}$

**Inhibit**


Switching voltage	$V_{eON}$	3.5	–	–	V	IC turned on
Turn-OFF voltage	$V_{eOFF}$	–	–	0.8	V	IC turned off
Input current	$I_e$	5	10	15	$\mu\text{A}$	$V_e = 5 \text{ V}$

**Note:** The reset output is low within the range  $V_Q = 1 \text{ V}$  to  $V_{RT}$




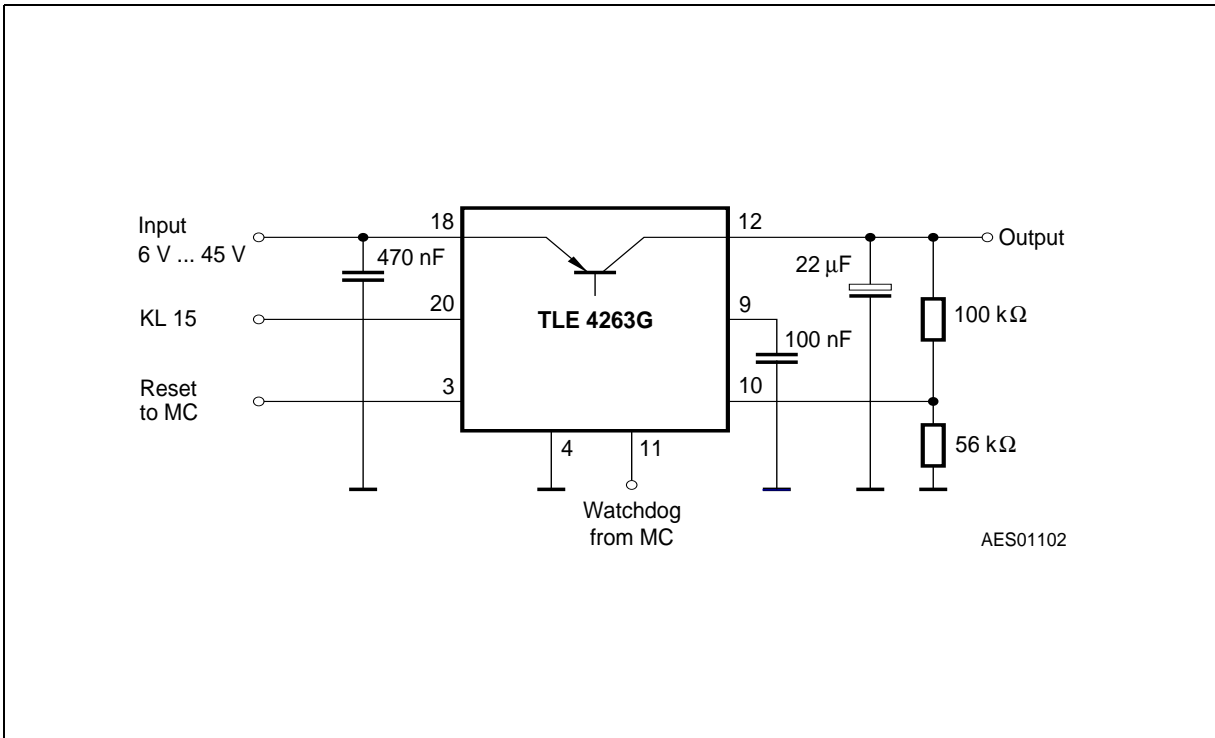

**Application Circuit**

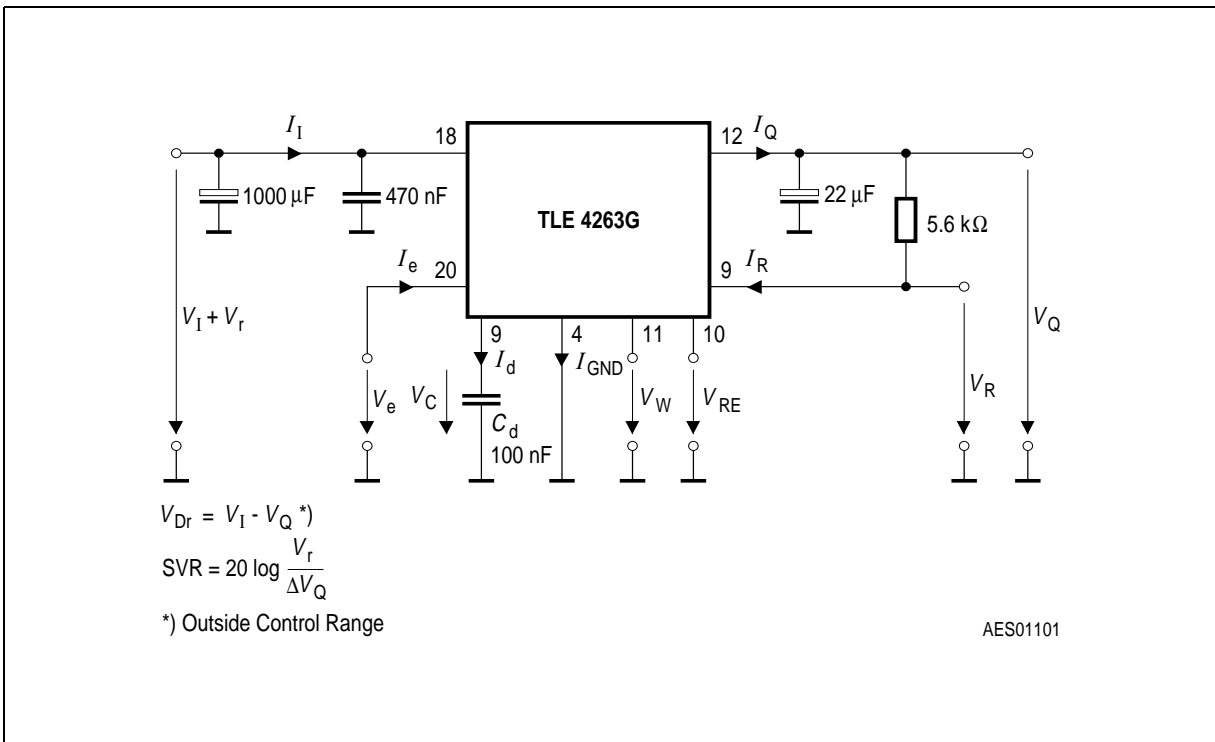


**Test Circuit**

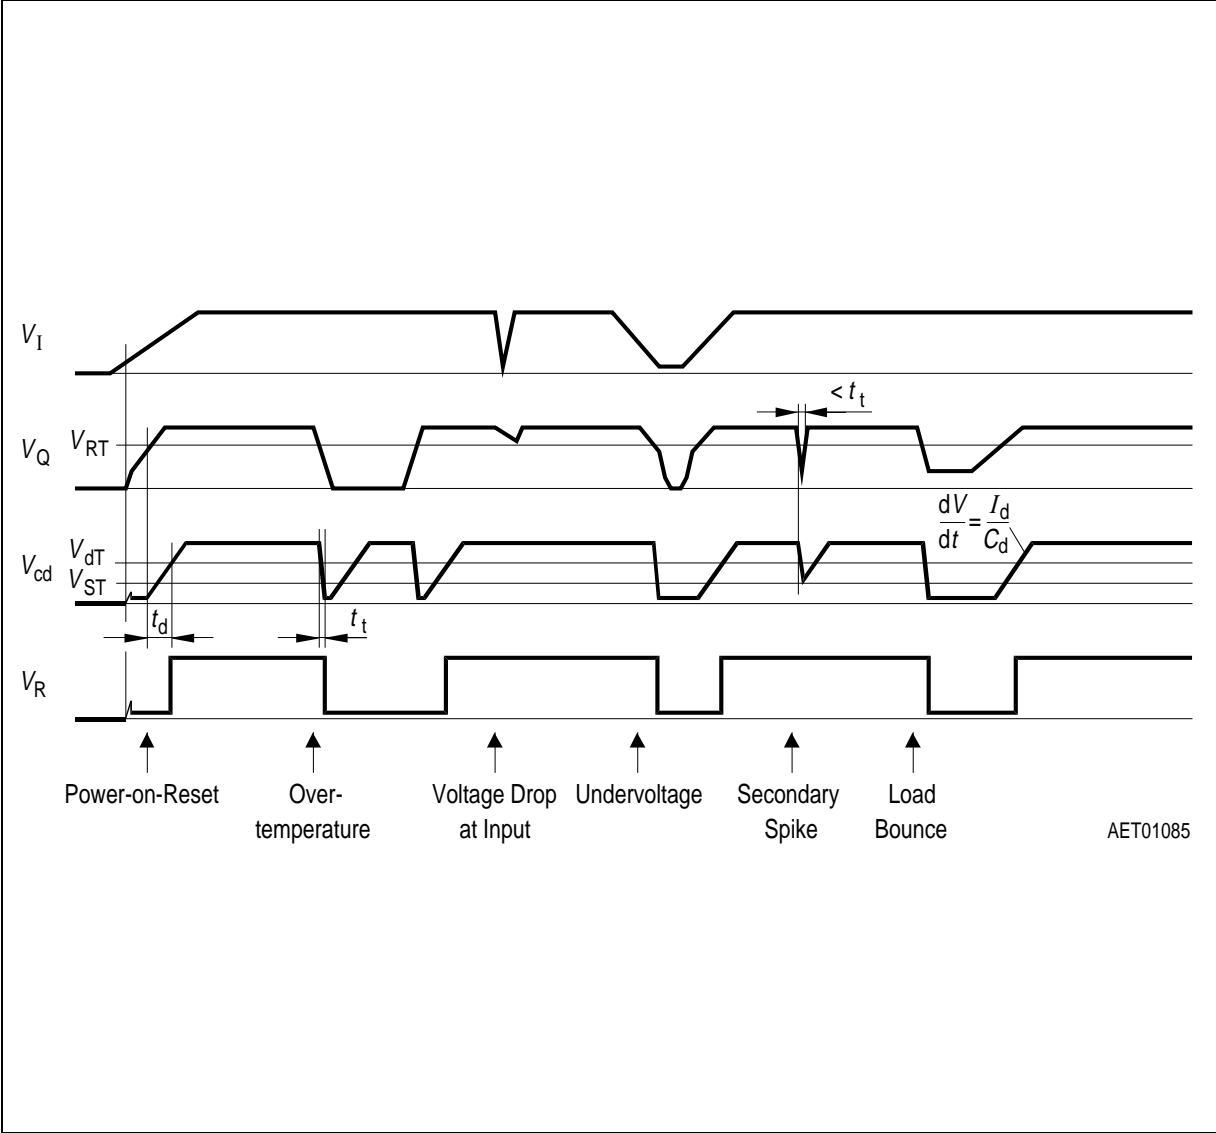


Time Response, Watchdog with High-Frequency Clock

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor


**Reset Threshold versus Output Voltage**

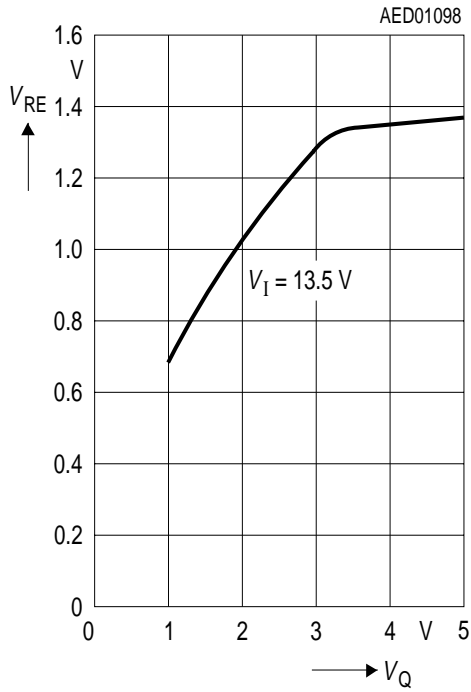


**Switching Voltage  $V_{Cd}$ ,  $V_{dT}$  and  $V_{ST}$  versus Temperature**

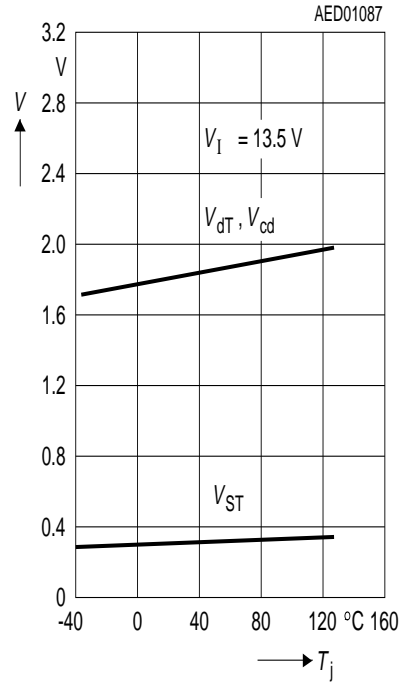


**Reset Switching Threshold versus Temperature**

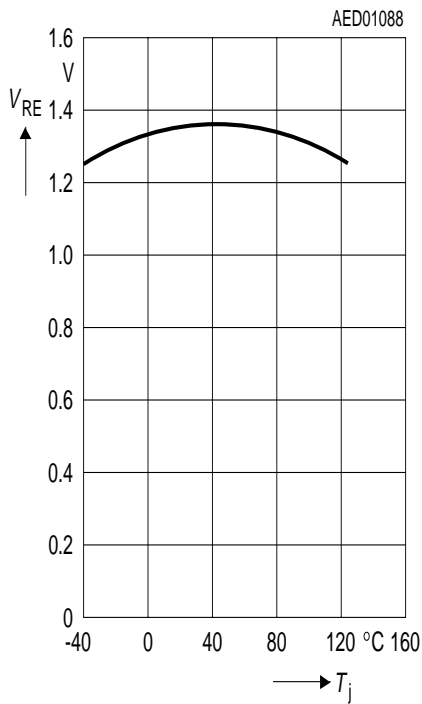


**Current Consumption of Inhibit versus Temperature**

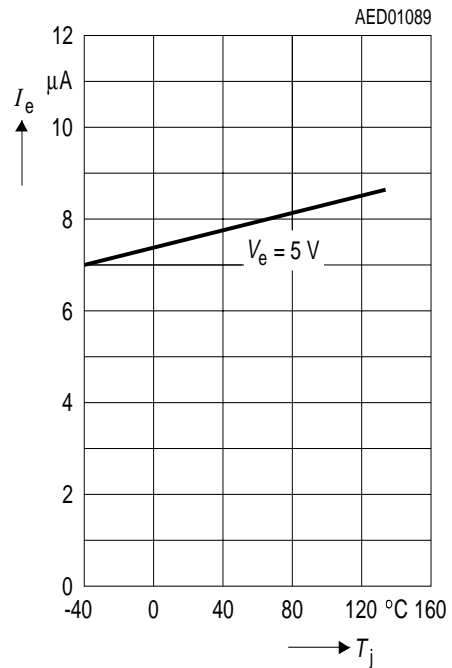


Drop Voltage versus Output Current

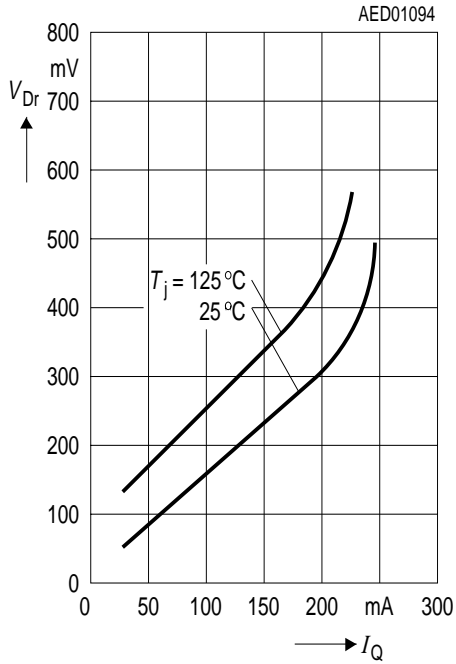


Current Consumption versus Output Current

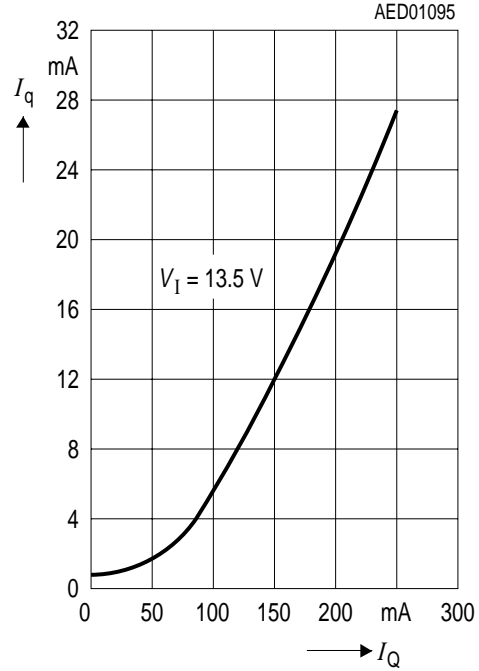


Current Consumption versus Input Voltage

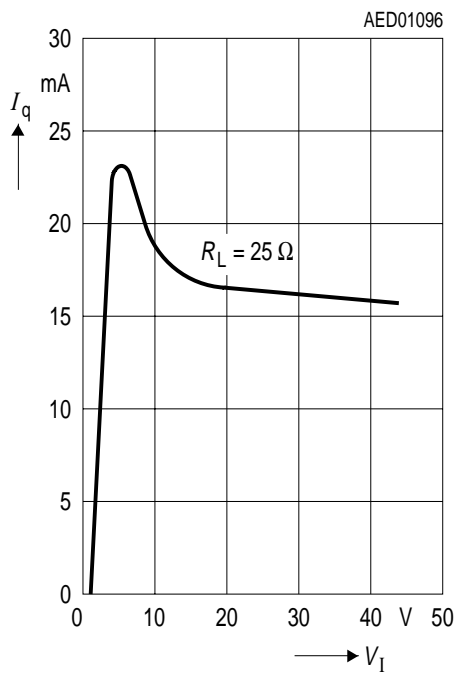


Output Voltage versus Input Voltage

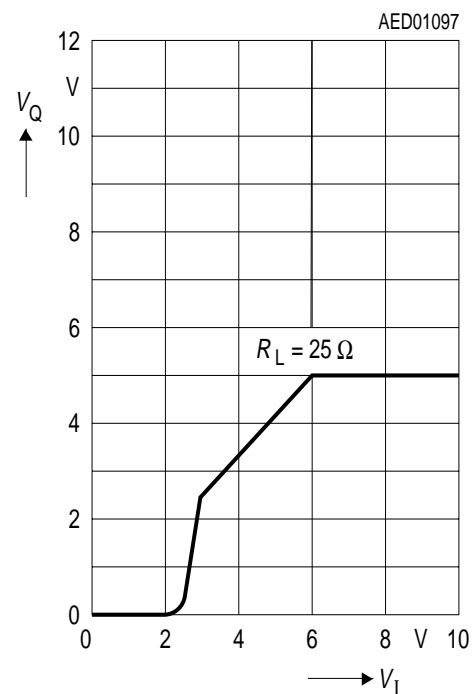


Charge Current and Discharge Current versus Temperature

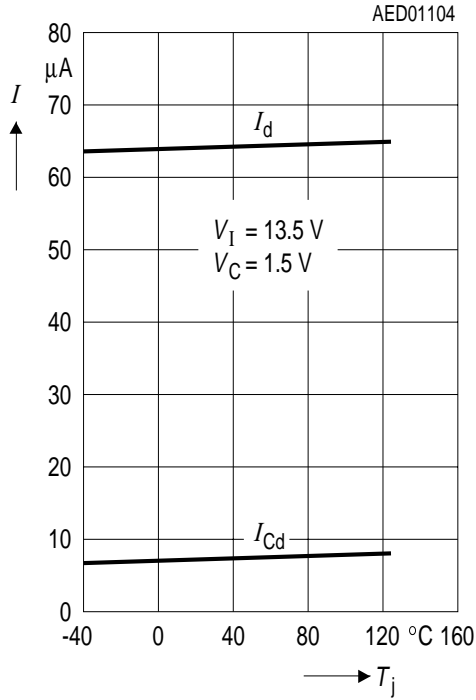


Output Voltage versus Temperature

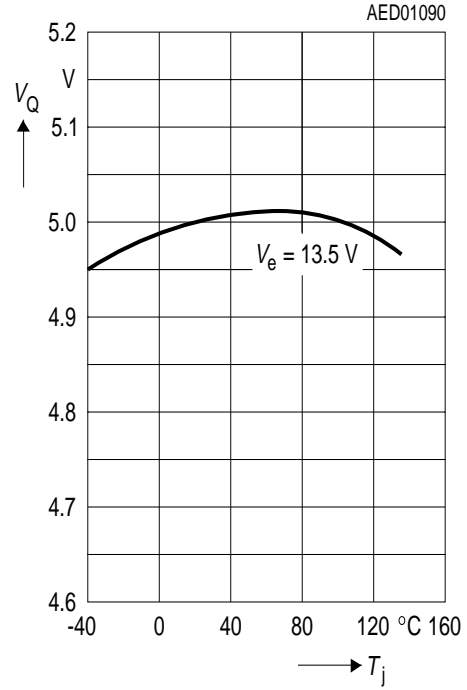


Pulse Time versus Temperature

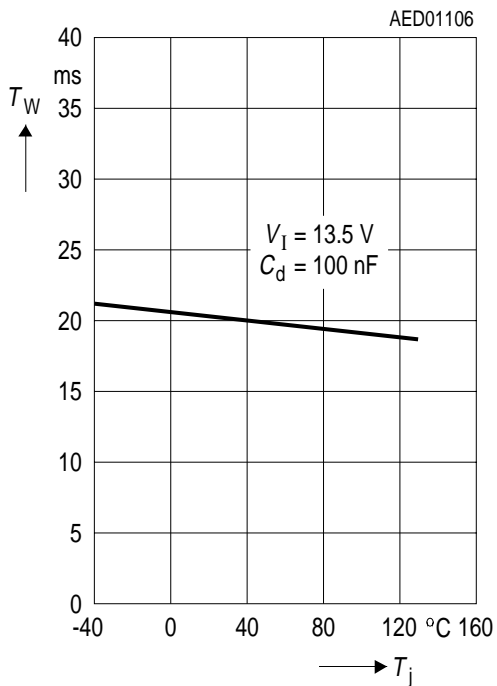


Input Response

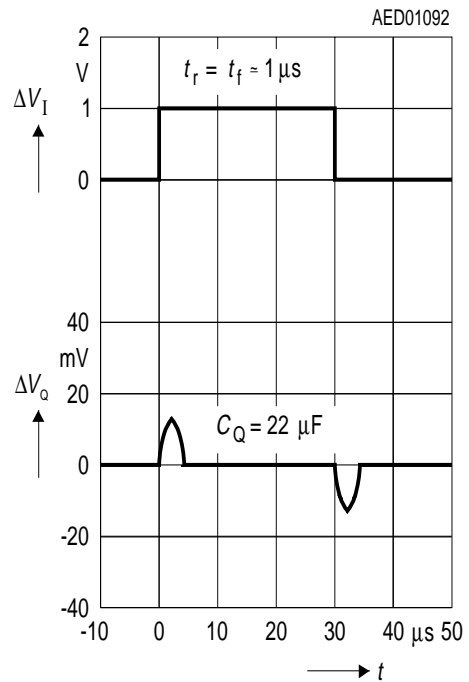

Output Current versus Input Voltage

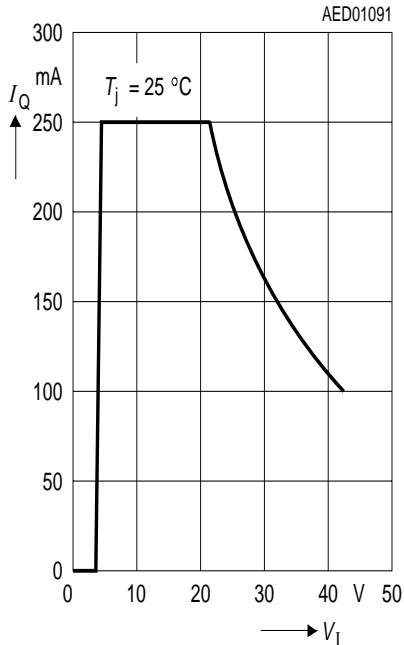


Load Response

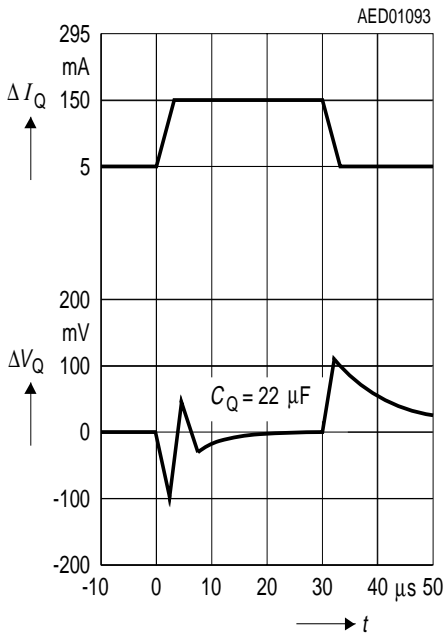

Downloaded from [Elcodis.com](http://Elcodis.com) electronic components distributor

Package Outlines

**P-DSO-20-6**  
(Plastic Dual Small Outline)

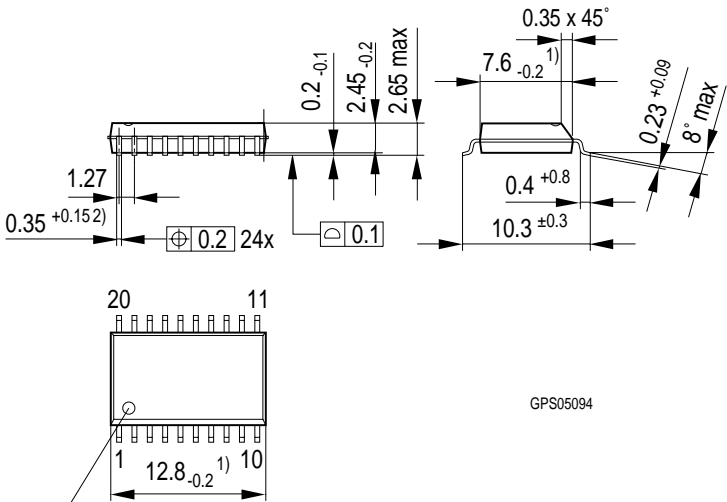

GPS05094

Index Marking

- 1) Does not include plastic or metal protrusions of 0.15 max per side
- 2) Does not include dambar protrusion of 0.05 max per side

Weight approx. 0.6 g


**Sorts of Packing**

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

SMD = Surface Mounted Device

Dimensions in mm

**P-DSO-14-1**  
(Plastic Dual Small Outline)

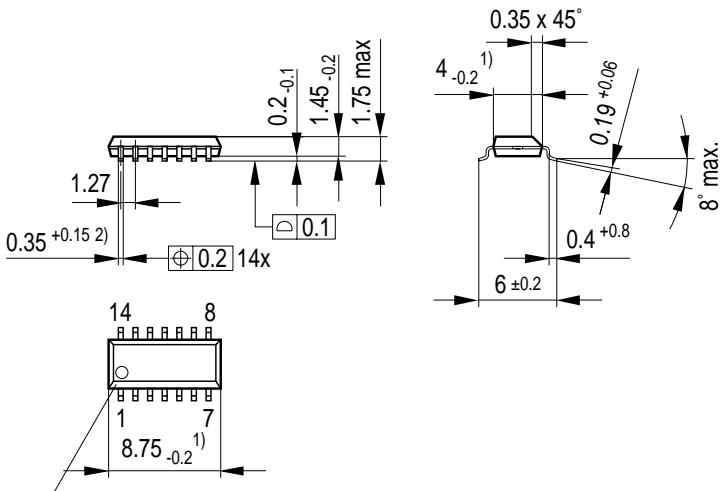

Index Marking

- 1) Does not include plastic or metal protrusion of 0.15 max. per side
- 2) Does not include dambar protrusion of 0.05 max. per side

GPS05093

**Sorts of Packing**

Package outlines for tubes, trays etc. are contained in our Data Book "Package Information".

SMD = Surface Mounted Device

Dimensions in mm