


Specify AEL

Chip Ceramic Resonators Built-In Capacitors



Ceramic Resonators

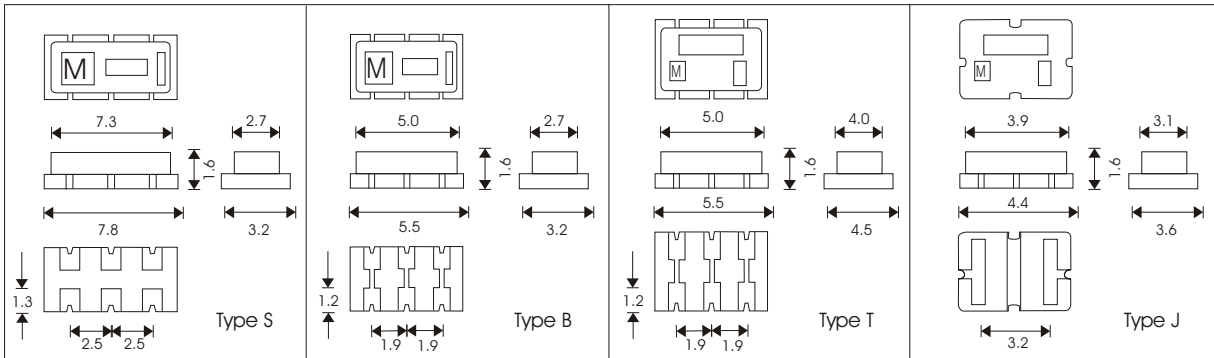

FEATURES

- Ceramic Encapsulation
- High Reliability
- Designed for Reflow Soldering
- Low Profile 1.8mm

APPLICATIONS

- Clock Generator
- Datacommunications
- Telecommunication
- Automotive Electronics

STANDARD SPECIFICATION

Part Number		Oscillation Frequency
Bulk Pack	Embossed Taping	
EFO S3584B5	EFO S3585E5	3.58 MHz +/- 0.5%
EFO S4004B5	EFO S4004E5	4.00 MHz +/- 0.5%
EFO S8004B5	EFO S8004E5	8.00 MHz +/- 0.5%
EFO S1005B5	EFO S1005E5	10.00 MHz +/- 0.5%
EFO S1205B5	EFO S1205E5	12.00 MHz +/- 0.5%
EFO B1605B5	EFO B1605E5	16.00 MHz +/- 0.5%
EFO B1695B5	EFO B1695E5	16.93 MHz +/- 0.5%
EFO B2005B5	EFO B2005E5	20.00 MHz +/- 0.5%
EFO T2405B5	EFO T2405E5	24.00 MHz +/- 0.5%
EFO T2545B5	EFO T2545E5	25.40 MHz +/- 0.5%
EFO J3205B5	EFO J3205E5	32.00 MHz +/- 0.5%
EFO J3385B5	EFO J3385E5	33.868 MHz +/- 0.5%

OPTIONS


- Type **S** (2.0 MHz ~ 13 MHz)
- Type **B** (13.1 MHz ~ 20 MHz)
- Type **T** (20.1 MHz ~ 30 MHz)
- Type **J** (30.1 MHz ~ 50 MHz)

Application Note

Reflow soldering shall be done at 220°C for less than 10 seconds, and peak temperature of 240°C

Flow soldering and dip soldering method should not be applied

ORDERING CODE

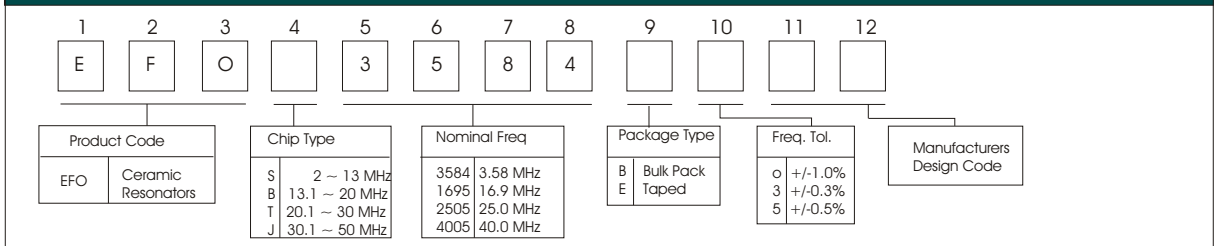

www.aelcrystals.co.uk quartz based frequency control components

Order Hotline +44 1293 524245

www.aelcrystals.co.uk
sales@aelcrystals.co.uk