


Smart Lowside Power Switch

Features

- Logic Level Input
- Input Protection (ESD)
- Thermal shutdown
- Overload protection
- Short circuit protection
- Overvoltage protection
- Current limitation
- Analog driving possible

Product Summary

| | | | |
|----------------------|--------------|-----|------------|
| Drain source voltage | V_{DS} | 42 | V |
| On-state resistance | $R_{DS(on)}$ | 28 | m Ω |
| Nominal load current | $I_{D(Nom)}$ | 4.6 | A |
| Clamping energy | E_{AS} | 3.5 | J |




Application

- All kinds of resistive, inductive and capacitive loads in switching or linear applications
- μ C compatible power switch for 12 V DC applications
- Replaces electromechanical relays and discrete circuits

General Description

N channel vertical power FET in Smart SIPMOS[®] technology. Fully protected by embedded protection functions.

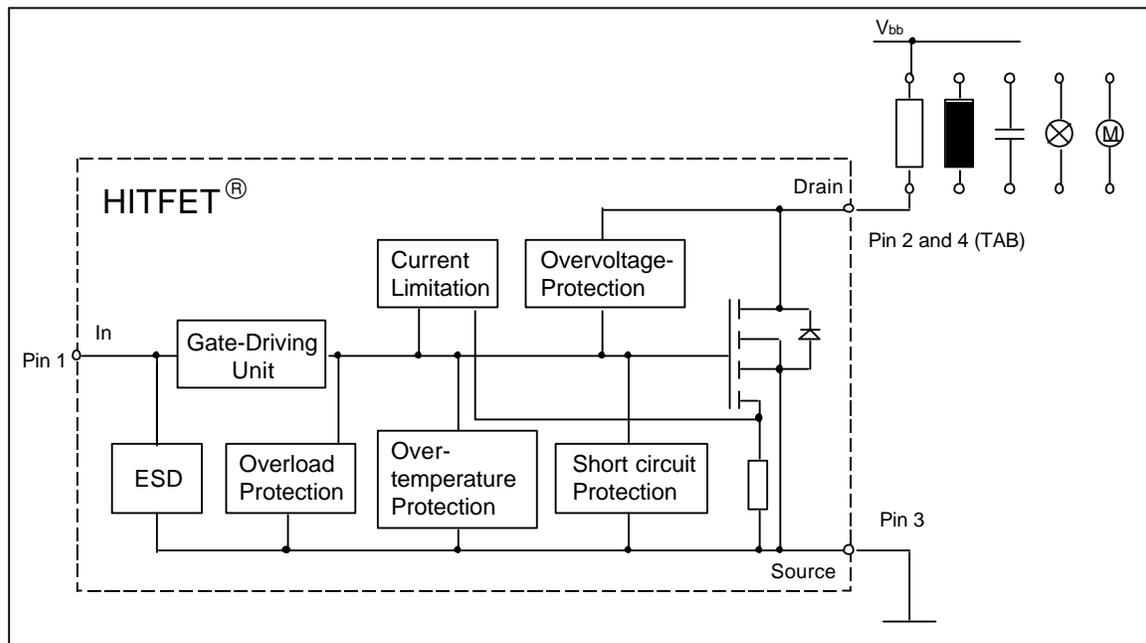

Maximum Ratings at $T_j = 25^\circ\text{C}$, unless otherwise specified

| Parameter | Symbol | Value | Unit |
|--|--------------|-------------------------------|------------------|
| Drain source voltage | V_{DS} | 42 | V |
| Drain source voltage for short circuit protection $T_j = -40\dots 150^\circ\text{C}$ | $V_{DS(SC)}$ | 28 | |
| Continuous input current $-0.2\text{V} \leq V_{IN} \leq 10\text{V}$ $V_{IN} < -0.2\text{V}$ or $V_{IN} > 10\text{V}$ | I_{IN} | no limit $ I_{IN} \leq 2$ | mA |
| Operating temperature | T_j | -40 ... +150 | $^\circ\text{C}$ |
| Storage temperature | T_{stg} | -55 ... +150 | |
| Power dissipation $T_C = 85^\circ\text{C}$ 6cm ² cooling area , $T_A = 85^\circ\text{C}$ | P_{tot} | 59 1.1 | W |
| Unclamped single pulse inductive energy ¹⁾ | E_{AS} | 3.5 | J |
| Load dump protection $V_{LoadDump}^{2)} = V_A + V_S$ $V_{IN} = 0$ and 10V , $t_d = 400\text{ms}$, $R_I = 2\ \Omega$, $R_L = 3\ \Omega$, $V_A = 13.5\text{V}$ | V_{LD} | 67.5 | V |
| Electrostatic discharge voltage (Human Body Model) according to MIL STD 883D, method 3015.7 and EOS/ESD assn. standard S5.1 - 1993 | V_{ESD} | 2 | kV |
| DIN humidity category, DIN 40 040 | | E | |
| IEC climatic category; DIN IEC 68-1 | | 40/150/56 | |

Thermal resistance

| | | | |
|--|------------|-----|-----|
| junction - case: | R_{thJC} | 1.1 | K/W |
| SMD: junction - ambient @ min. footprint | R_{thJA} | 115 | |
| @ 6 cm ² cooling area ³⁾ | | 55 | |

¹ Not tested, specified by design.

² $V_{Loaddump}$ is setup without the DUT connected to the generator per ISO 7637-1 and DIN 40839

³ Device on 50mm*50mm*1.5mm epoxy PCB FR4 with 6cm² (one layer, 70µm thick) copper area for drain connection. PCB mounted vertical without blown air.

Electrical Characteristics

| Parameter at $T_j = 25^\circ\text{C}$, unless otherwise specified | Symbol | Values | | | Unit |
|--|--------------|------------|----------|----------|------------------|
| | | min. | typ. | max. | |
| Characteristics | | | | | |
| Drain source clamp voltage $T_j = -40 \dots +150$, $I_D = 10 \text{ mA}$ | $V_{DS(AZ)}$ | 42 | - | 55 | V |
| Off-state drain current $T_j = -40 \dots +150^\circ\text{C}$ $V_{DS} = 32 \text{ V}$, $V_{IN} = 0 \text{ V}$ | I_{DSS} | - | 1.5 | 20 | μA |
| Input threshold voltage $I_D = 1.2 \text{ mA}$, $T_j = 25^\circ\text{C}$ $I_D = 1.2 \text{ mA}$, $T_j = 150^\circ\text{C}$ | $V_{IN(th)}$ | 1.3 0.8 | 1.7 - | 2.2 - | V |
| On state input current | $I_{IN(on)}$ | - | 10 | 30 | μA |
| On-state resistance $V_{IN} = 5 \text{ V}$, $I_D = 4.6 \text{ A}$, $T_j = 25^\circ\text{C}$ $V_{IN} = 5 \text{ V}$, $I_D = 4.6 \text{ A}$, $T_j = 150^\circ\text{C}$ | $R_{DS(on)}$ | - - | 27 54 | 34 68 | $\text{m}\Omega$ |
| On-state resistance $V_{IN} = 10 \text{ V}$, $I_D = 4.6 \text{ A}$, $T_j = 25^\circ\text{C}$ $V_{IN} = 10 \text{ V}$, $I_D = 4.6 \text{ A}$, $T_j = 150^\circ\text{C}$ | $R_{DS(on)}$ | - - | 23 46 | 28 56 | |
| Nominal load current $T_j < 150^\circ\text{C}$, $V_{IN} = 10 \text{ V}$, $T_A = 85^\circ\text{C}$, SMD ¹⁾ | $I_{D(Nom)}$ | 4.6 | - | - | A |
| Nominal load current $V_{IN} = 10 \text{ V}$, $V_{DS} = 0.5 \text{ V}$, $T_C = 85^\circ\text{C}$, $T_j < 150^\circ\text{C}$ | $I_{D(ISO)}$ | 12.6 | - | - | |
| Current limit (active if $V_{DS} > 2.5 \text{ V}$) ²⁾ $V_{IN} = 10 \text{ V}$, $V_{DS} = 12 \text{ V}$, $t_m = 200 \mu\text{s}$ | $I_{D(lim)}$ | 30 | 45 | 55 | |

¹⁾ @ 6 cm² cooling area

²⁾ Device switched on into existing short circuit (see diagram Determination of $I_{D(lim)}$). If the device is in on condition and a short circuit occurs, these values might be exceeded for max. 50 μs .

Electrical Characteristics

| Parameter at $T_j = 25^\circ\text{C}$, unless otherwise specified | Symbol | Values | | | Unit |
|---|--------|--------|------|------|------|
| | | min. | typ. | max. | |

Dynamic Characteristics

| | | | | | |
|---|--------------------|---|-----|-----|------------------|
| Turn-on time V_{IN} to 90% I_D : $R_L = 4.7 \Omega$, $V_{IN} = 0$ to 10 V, $V_{bb} = 12$ V | t_{on} | - | 60 | 120 | μs |
| Turn-off time V_{IN} to 10% I_D : $R_L = 4.7 \Omega$, $V_{IN} = 10$ to 0 V, $V_{bb} = 12$ V | t_{off} | - | 60 | 120 | |
| Slew rate on 70 to 50% V_{bb} : $R_L = 4.7 \Omega$, $V_{IN} = 0$ to 10 V, $V_{bb} = 12$ V | $-dV_{DS}/dt_{on}$ | - | 0.3 | 1.5 | V/ μs |
| Slew rate off 50 to 70% V_{bb} : $R_L = 4.7 \Omega$, $V_{IN} = 10$ to 0 V, $V_{bb} = 12$ V | dV_{DS}/dt_{off} | - | 0.3 | 1.5 | |

Protection Functions¹⁾

| | | | | | |
|--|----------------|-----|-----|-----|------------------|
| Thermal overload trip temperature | T_{jt} | 150 | 175 | - | $^\circ\text{C}$ |
| Input current protection mode | $I_{IN(Prot)}$ | - | 220 | 400 | μA |
| Input current protection mode $T_j = 150^\circ\text{C}$ | $I_{IN(Prot)}$ | - | 180 | 400 | |
| Unclamped single pulse inductive energy ²⁾ $I_D = 4.6$ A, $T_j = 25^\circ\text{C}$, $V_{bb} = 12$ V | E_{AS} | 3.5 | - | - | J |

Inverse Diode


| | | | | | |
|---|----------|---|-----|---|---|
| Inverse diode forward voltage $I_F = 51$ A, $t_m = 250 \mu\text{s}$, $V_{IN} = 0$ V, $t_p = 300 \mu\text{s}$ | V_{SD} | - | 1.0 | - | V |
|---|----------|---|-----|---|---|

¹⁾ Integrated protection functions are designed to prevent IC destruction under fault conditions described in the data sheet. Fault conditions are considered as "outside" normal operating range. Protection functions are not designed for continuous repetitive operation.


²⁾ Not tested, specified by design.

Block diagram


Terms

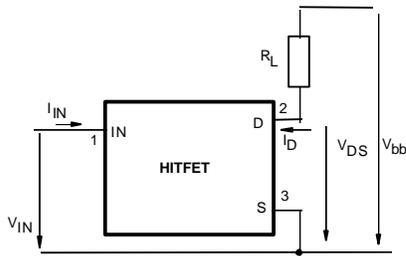


Inductive and overvoltage output clamp

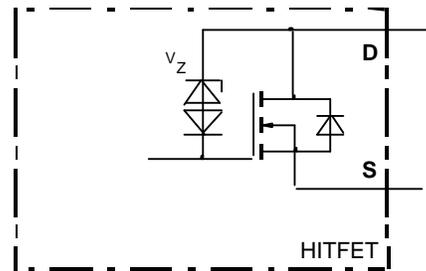

Input circuit (ESD protection)

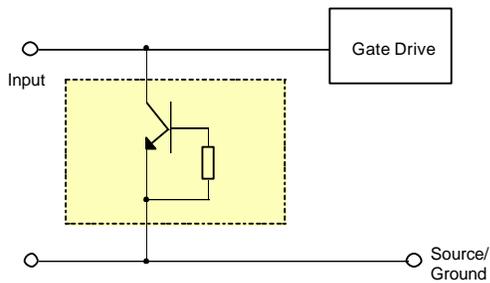


Short circuit behaviour

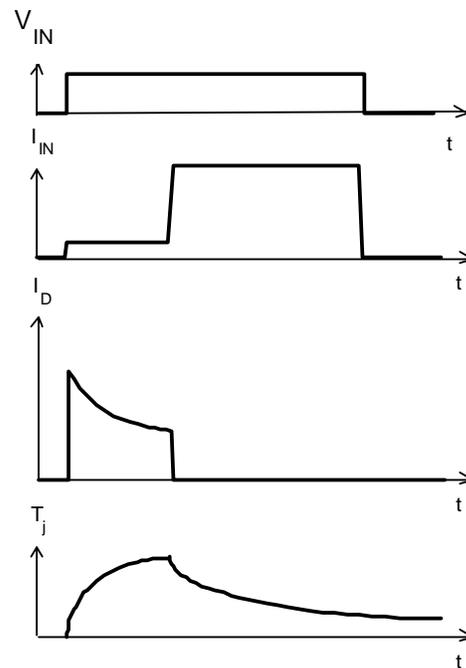

1 Maximum allowable power dissipation


$P_{tot} = f(T_C)$ resp.

$P_{tot} = f(T_A) @ R_{thJA}=55 \text{ K/W}$

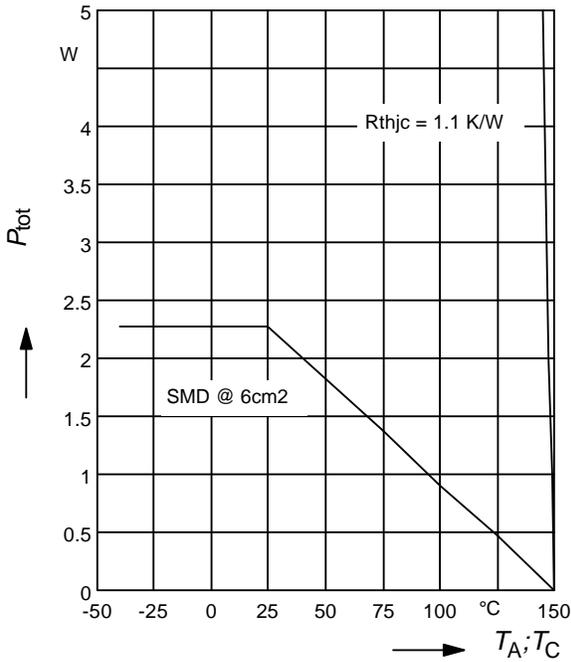


2 On-state resistance

$R_{ON} = f(T_j); I_D=12.6A; V_{IN}=10V$

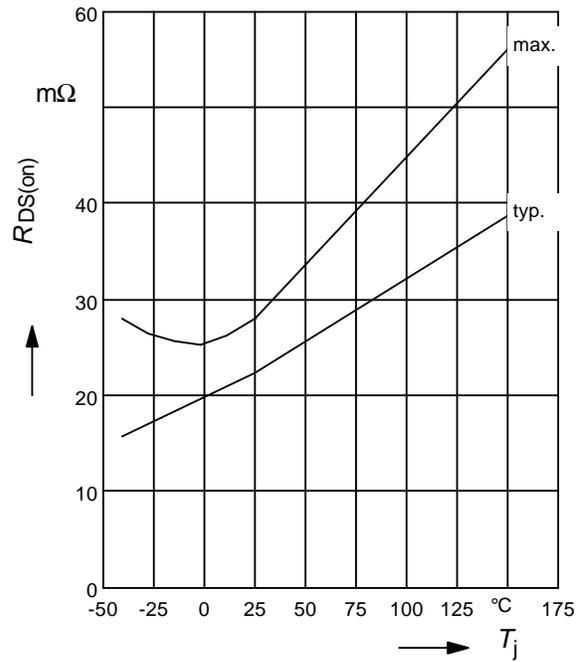


3 On-state resistance

$R_{ON} = f(T_j); I_D= 12.6A; V_{IN}=5V$

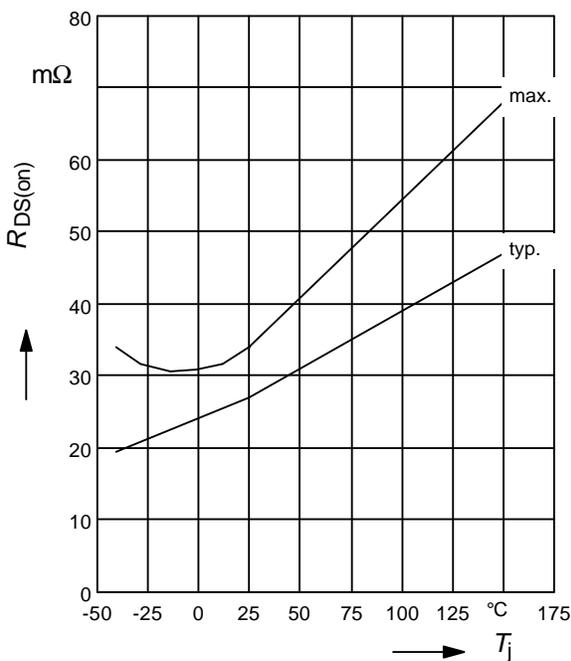


4 Typ. input threshold voltage

$V_{IN(th)} = f(T_j); I_D = 1.2 \text{ mA}; V_{DS} = 12V$

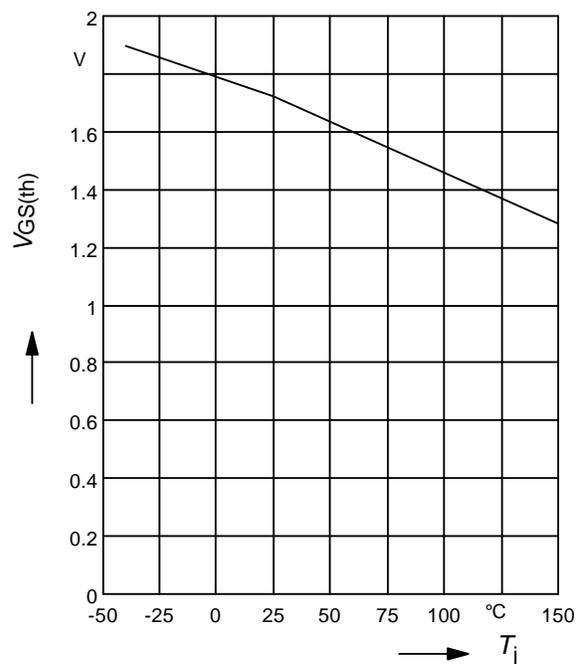

5 Typ. transfer characteristics


$I_D = f(V_{IN}); V_{DS} = 12V; T_{Jstart} = 25^\circ C$

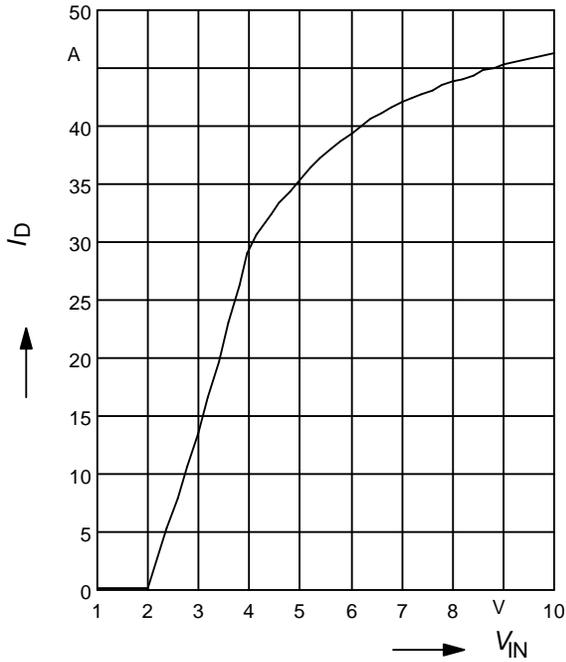

6 Typ. short circuit current

$I_{D(lim)} = f(T_j); V_{DS} = 12V$


Parameter: V_{IN}

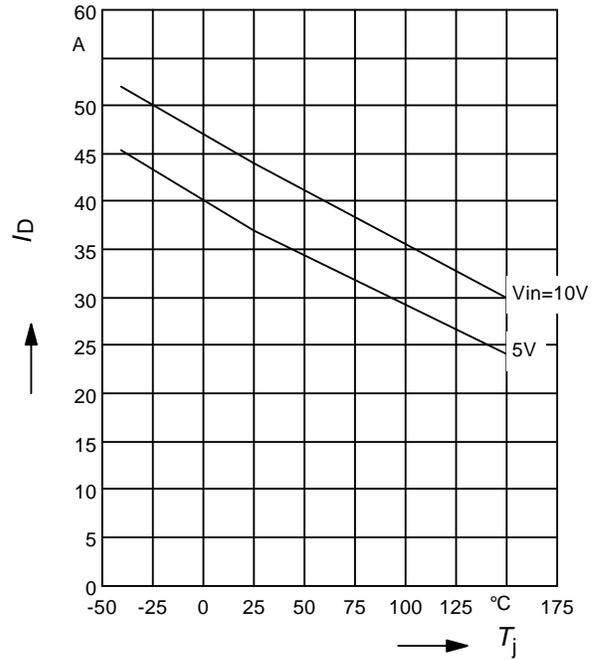

7 Typ. output characteristics


$I_D = f(V_{DS}); T_{Jstart} = 25^\circ C$

Parameter: V_{IN}

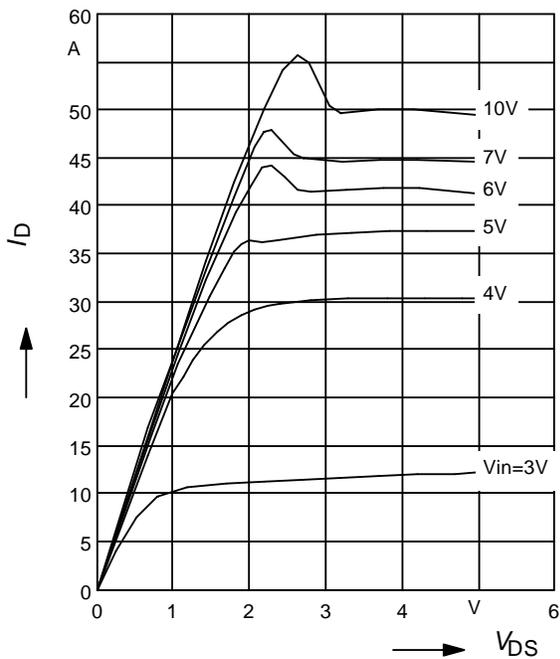

8 Typ. off-state drain current


$I_{DSS} = f(T_j)$

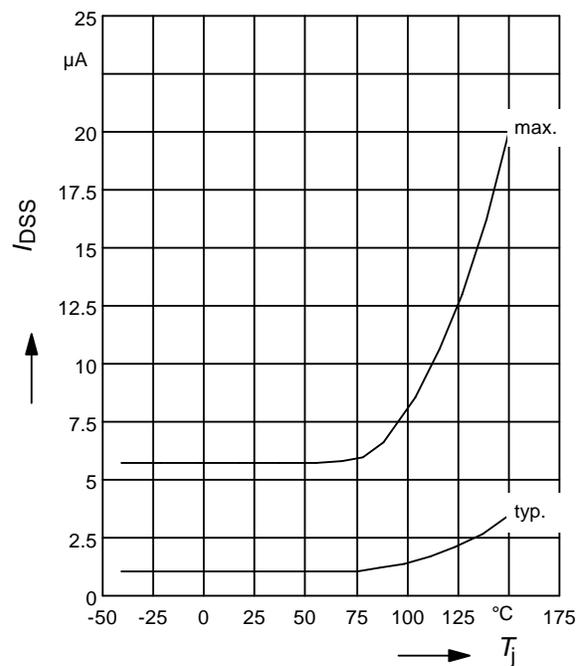

9 Typ. overload current

$I_{D(lim)} = f(t)$, $V_{bb}=12\text{ V}$, no heatsink


Parameter: T_{jstart}

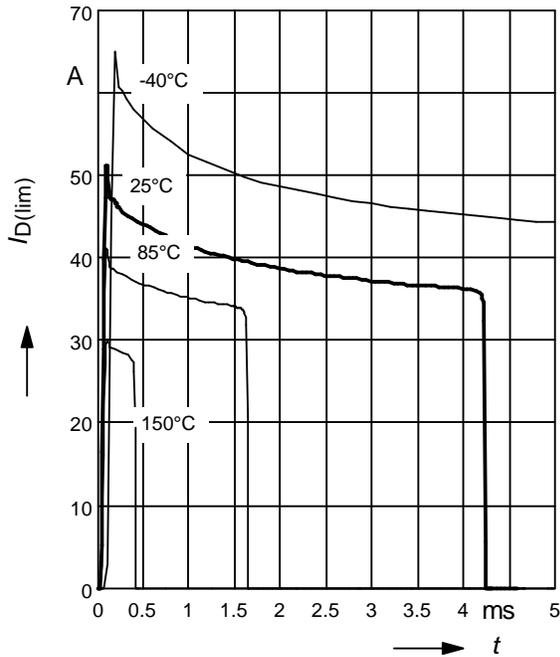

10 Typ. transient thermal impedance

$Z_{thJA} = f(t_p)$ @ 6 cm^2 cooling area


Parameter: $D = t_p/T$

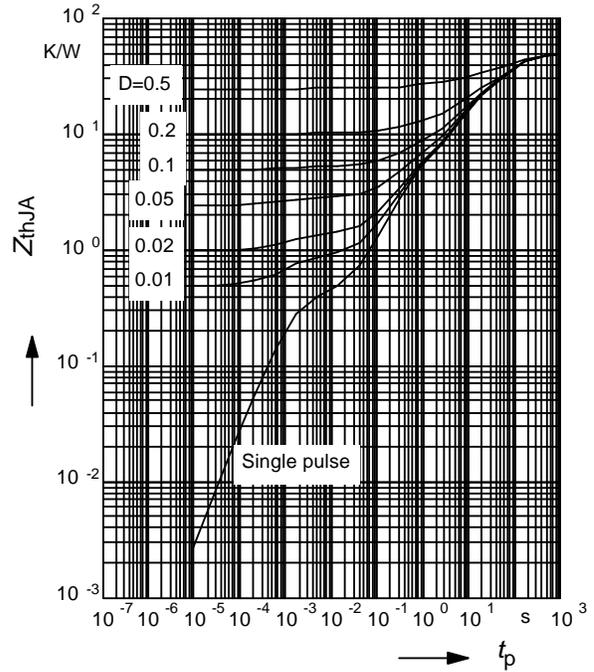


11 Determination of $I_{D(lim)}$

$I_{D(lim)} = f(t)$; $t_m = 200\mu\text{s}$

Parameter: T_{jstart}

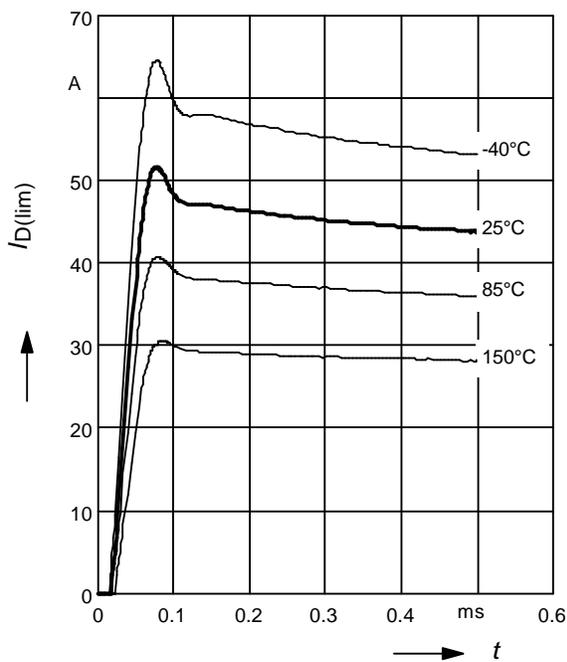

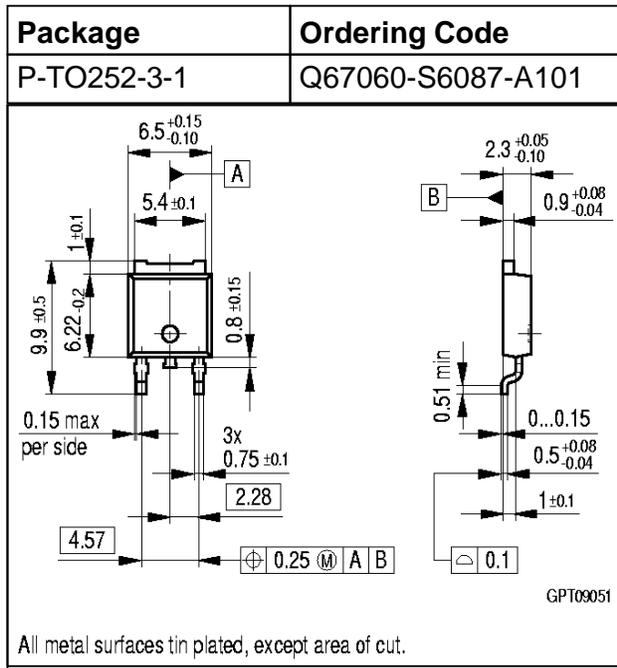

Published by
Infineon Technologies AG,
Bereichs Kommunikation
St.-Martin-Strasse 53,
D-81541 München
© Infineon Technologies AG 1999
All Rights Reserved.

Attention please!

The information herein is given to describe certain components and shall not be considered as warranted characteristics.

Terms of delivery and rights to technical change reserved.

We hereby disclaim any and all warranties, including but not limited to warranties of non-infringement, regarding circuits, descriptions and charts stated herein.

Infineon Technologies is an approved CECC manufacturer.

Information

For further information on technology, delivery terms and conditions and prices please contact your nearest Infineon Technologies Office in Germany or our Infineon Technologies Representatives worldwide (see address list).

Warnings

Due to technical requirements components may contain dangerous substances.

For information on the types in question please contact your nearest Infineon Technologies Office.

Infineon Technologies Components may only be used in life-support devices or systems with the express written approval of Infineon Technologies, if a failure of such components can reasonably be expected to cause the failure of that life-support device or system, or to affect the safety or effectiveness of that device or system. Life support devices or systems are intended to be implanted in the human body, or to support and/or maintain and sustain and/or protect human life. If they fail, it is reasonable to assume that the health of the user or other persons may be endangered.