

# PPC



## PPC-7500F Fanless and High Performance 10.4" Panel PC

### Features and Benefits:

- True fanless thermal solution
- Small size, low power and economical solution
- Built-in giga LAN
- On board IDE interface Type-II compact flash slot
- Touch screen support
- 24v DC power support
- I/O port highlights:
  - 2 powered serials,
  - 1 parallel,
  - 2 USB2.0,
  - 1 keyboard,
  - 1 mouse,
  - 1 10M/100M/1G Base-TX LAN,
  - 1 line-in/-out/mic
  - 1 x CF slot on the left side (IDE interface)
- Industry level of durability
- Against dust and powerful jetting



No. 24, Lane 365, Yang Guang St., Nei Hu District, Taipei 114, Taiwan, R.O.C.

Tel: +886-2-8751-1111

Fax: +886-2-8751-1199

Email: sales@protech.com.tw

http://www.protech.com.tw




ISO CERTIFIED  
9001 14001


# PPC-7500F

Fanless and High Performance 10.4" Panel PC


Front View

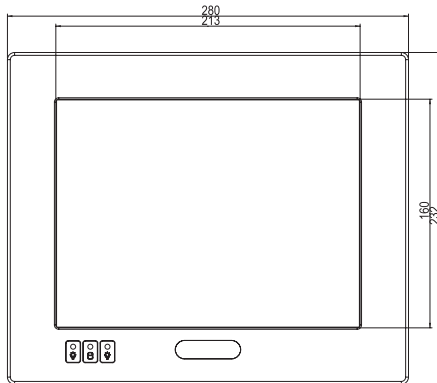

Rear View

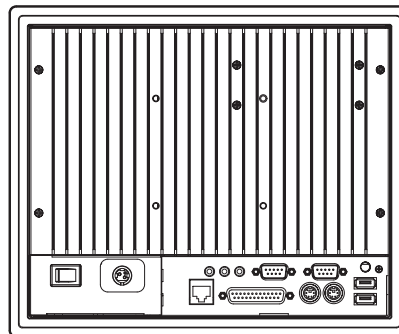

Side View

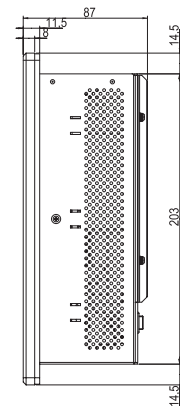

Unit: mm

## Specification

Systems	
<b>CPU Support</b>	Intel Celeron® M ULV 1.0GHz on board
<b>Memory Support</b>	1 x 200pin DDR SO-DIMM, Support DDR 333 SDRAM up to 1GB
<b>Front Bazel</b>	Aluminum
<b>Open Frame</b>	Yes (optional)
<b>IP65 / NEMA4</b>	Yes
<b>Power Supply</b>	DC 24Vin 80W power supply / AC100-240Vin (optional power adaptor)
<b>O.S. Support</b>	Win 98SE / 2000 / XP / CE.net, Linux Redhat 8.0/9.0
<b>Dimension (W x H x D)</b>	280 x 232 x 80 mm (11.02" x 9.13" x 3.15")
<b>System Weight</b>	7 Kg (13.22lb)
<b>VESA Mounting Support</b>	75mm
<b>Certificate</b>	CE / FCC

## I/O Ports

<b>USB</b>	2 x USB2.0
<b>KB / Mouse</b>	2
<b>Audio</b>	Line in / Line out / MIC in
<b>Parallel</b>	1 x parallel port (SPP / EPP / ECP)
<b>Serial Port</b>	2 x COMs, COM1 supports +5V or +12V, COM2 for RS232/422/485, supports +5V only

<b>Digital I/O</b>	N/A
<b>LAN</b>	10/100/1000 Mbps
<b>VGA</b>	N/A
<b>Brightness Control</b>	VR on rear panel
<b>Drive Bay</b>	1x 2.5" HDD, 1x IDE CF slot on board
<b>Expansion Slots</b>	N/A

## Display

<b>LCD</b>	10.4" SVGA TFT LCD
<b>Touch Screen</b>	5W Analog resistive (USB interface)

## Environment

<b>Operating Temp.</b>	0 °~ 40 °C
<b>Storage Temp.</b>	-20 °~ 60 °C
<b>Humidity</b>	20% ~ 90%

## Ordering

<b>PPC-7500F</b>	FanlessPanel PC with 10.4" LCD, Intel Celeron M ULV 600MHz CPU board, resistive touchscreen, 80W DC power supply
<b>EFSP120-ACB</b>	120W, 24 Vdc output power adaptor

All of trademarks and brand names are the property of their owners. Trademark "Protech" is the property of Protech Systems Co., Ltd. All information contained in this document is subject to change without any prior notice. This catalog is copyrighted in May, 2006.