



## VRLA Rechargeable Battery

# EP26-12 (EP26-12FR)



Measures

Technology

Values

Innovation

### FEATURES

- Maintenance free(no water topping-up required)
- No free acid(Non-spillable battery)
- Can be used in any orientation(excluding used inverted)
- The battery is designed for heavy duty cyclic application
- Low self-discharge rate, lower than 3% capacity loss per month

### APPLICATION

- UPS
- Golf-Carts
- Wheelchairs
- Lawn Mowers
- Electric Vehicles



### SPECIFICATIONS

Nominal Voltage	12 V
Nominal Capacity	26Ah @ 20 hour rate F.V.(1.75V/cell)
Approx. Weight	9600g(21.17lbs.)
Terminals	B1 (Fitting M5 bolt & nut) , T2 and I1 are optional
Internal Resistance	≤ 10m Ω (Fully Charged )
Max. Discharge Current	390 A (5 sec.)
Max. Charge Current	7.8 A
Operating Temperature Range	Charge : 0°C~40°C(32°F~104°F) Discharge : -20°C~50°C(-4°F~122°F) Storage. : -20°C~40°C(-4°F~104°F)
Container Material	ABS(UL94-HB, UL94-V0 is optional)




ISO 9001	
ISO14001	
UL	
CE	
<ul style="list-style-type: none"> <li>● IEC61056</li> <li>● JIS C 8702</li> <li>● GB/T 19639</li> </ul>	

### DIMENSION(mm/inch)

### OUTER DIMENSIONS

### TERMINAL TYPE

- Length  
175±1.5 (6.89±0.06)
- Width  
166±1.5 (6.54±0.06)
- Container Height  
125±1.5 (4.92±0.06)
- Total Height  
125±1.5 (4.92±0.06)

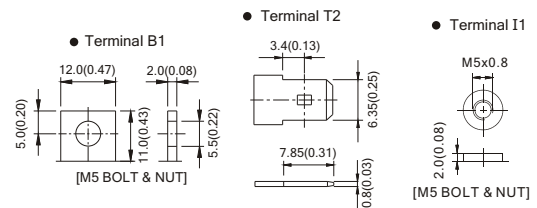

Terminal Hardware Initial Torque: B1(2.5Nm±5%),I1(4.0Nm±5%)

### Constant power discharge characteristics at 25 °C/77 °F

Unit: W

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	847.0	636.6	515.5	310.1	179.8	75.8	52.4	29.19	15.26
1.75V	981.0	689.7	539.7	322.0	185.0	77.3	53.1	29.64	15.60
1.70V	1040.0	714.6	556.0	329.1	188.3	78.0	53.5	29.79	15.67
1.65V	1088.0	731.7	569.0	333.9	190.9	78.7	53.9	29.86	15.71
1.60V	1122.0	746.2	580.2	337.3	192.8	79.1	53.9	29.86	15.71

### Constant current discharge characteristics at 25 °C/77 °F

Unit: A

F.V. (V/cell) \ Discharge Time	5 Min	10 Min	15 Min	30 Min	1 Hr	3 Hr	5 Hr	10 Hr	20 Hr
1.80V	76.3	56.0	44.8	26.3	15.1	6.32	4.37	2.43	1.27
1.75V	90.0	60.7	46.9	27.3	15.5	6.44	4.43	2.47	1.30
1.70V	95.4	62.9	48.3	27.9	15.8	6.50	4.46	2.48	1.31
1.65V	99.8	64.4	49.5	28.3	16.0	6.56	4.49	2.49	1.31
1.60V	102.9	65.7	50.5	28.6	16.2	6.59	4.49	2.49	1.31

All data shall be changed without prior notice, BB reserves the right to explain and update the information contained herein.