



CHENMKO ENTERPRISE CO.,LTD

SURFACE MOUNT

SCHOTTKY BARRIER DIODE
VOLTAGE 40 Volts CURRENT 0.03 Ampere

Lead free devices

CH717FPT

APPLICATION

- * General purpose detection
- * High speed switching

FEATURE

- * Small surface mounting dual element linear type.
(SC-70/SOT-323)
- * Low VF and low IR.
- * High reliability


CONSTRUCTION

- * Silicon epitaxial planar


MARKING

- * 3E

CIRCUIT



SC-70/SOT-323

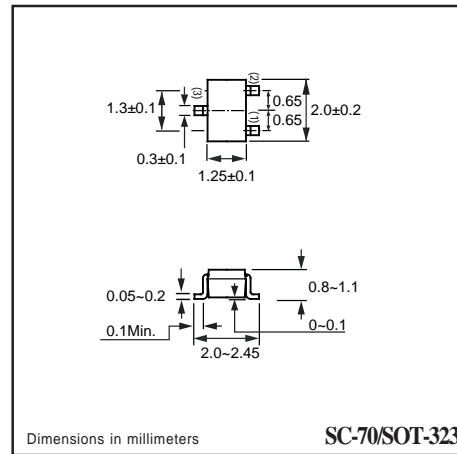

Dimensions in millimeters

SC-70/SOT-323

MAXIMUM RATINGS (At TA = 25°C unless otherwise noted)

| RATINGS | SYMBOL | CH717FPT | UNITS |
|--|------------------|-------------|-------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 40 | Volts |
| Maximum RMS Voltage | V _{RMS} | 28 | Volts |
| Maximum DC Blocking Voltage | V _{DC} | 40 | Volts |
| Maximum Average Forward Rectified Current | I _o | 0.03 | Amps |
| Peak Forward Surge Current at 8.3 mSec single half sine-wave | I _{FSM} | 0.2 | Amps |
| Typical Junction Capacitance between Terminal (Note 1) | C _J | 2.0 | pF |
| Maximum Operating Temperature Range | T _J | +125 | °C |
| Storage Temperature Range | T _{STG} | -40 to +125 | °C |

ELECTRICAL CHARACTERISTICS (At TA = 25°C unless otherwise noted)

| CHARACTERISTICS | SYMBOL | CH717FPT | UNITS |
|---|----------------|----------|-------|
| Maximum Instantaneous Forward Voltage at I _F = 1mA | V _F | 0.37 | Volts |
| Maximum Average Reverse Current at V _R = 10V | I _R | 1.0 | uAmps |

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 1.0 volts.
2. ESD sensitive product handling required.

2002-5

RATING CHARACTERISTIC CURVES (CH717FPT)

FIG. 1 - FORWARD CHARACTERISTICS

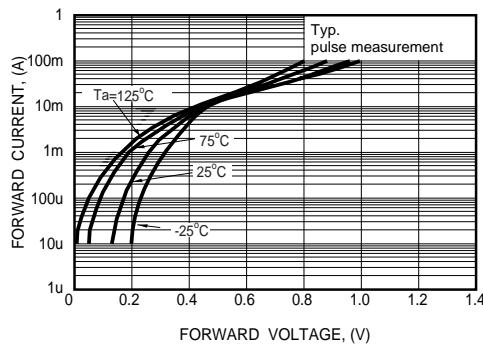


FIG. 2 - REVERSE CHARACTERISTICS

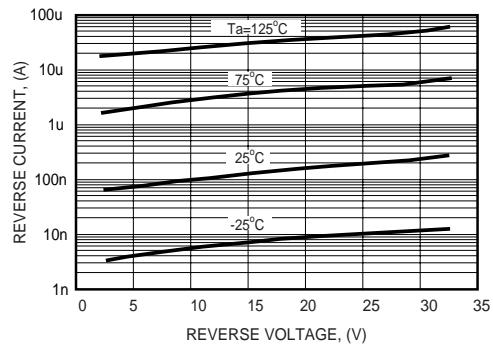


FIG. 3 - TYPICAL JUNCTION CAPACITANCE

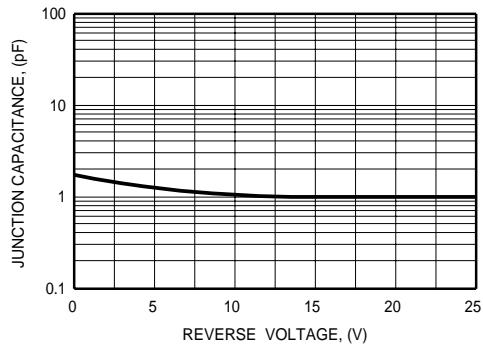


FIG. 4 REVERSE RECOVERY TIME CHARACTERISTICS

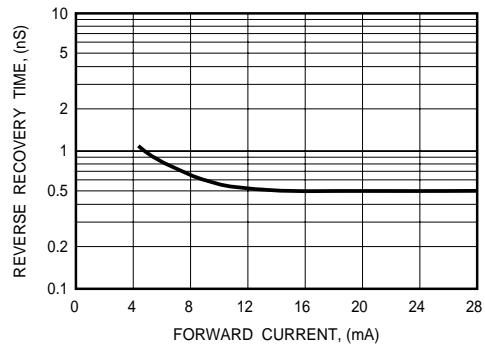


FIG. 5 - TYPICAL FORWARD CURRENT DERATING CURVE

