

4

3



2

1

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION AUGUST 2005.
 © COPYRIGHT 2005 BY TYCO ELECTRONICS CORPORATION. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS		DATE	BY	APP'D
E	B	F	LTR			
		C	ECR-05-006587	03AUG05	JMS	FWK

- NOTES:**
- ▲ SINGLE PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ▲ 50 TRAY PACK IN ACCORDANCE WITH AMP SPEC 107-3275
 - ▲ Au PLATING OVER Ni PLATING OVER Cu PLATING
 - ▲ Ni PLATING OVER Cu PLATING
 - ▲ TIN PLATING
 - ▲ RECOMMENDED SELF-TAPPING SCREW 221108-4
 - 7. RECOMMENDED MOUNT NUT 1-1634816-0
 - 8. RECOMMENDED LOCKWASHER 1-1634817-0
 - 9. CHARACTERISTICS
 - FREQUENCY RANGE: DC - 4GHz
 - NOMINAL IMPEDANCE: 50 OHMS
 - WORKING VOLTAGE: 500V RMS
 - INSULATION RESISTANCE: 5000 MOHMS
 - DIELECTRIC WITHSTAND VOLTAGE: 1500V RMS
 - CONTACT RESISTANCE: 1.5 mOHMS
 - CENTRE CONTACT: 0.2 mOHMS
 - 10. MECHANICAL CHARACTERISTICS
 - DURABILITY: 50 CYCLES
 - 11. FOR TECHNICAL DATA REFER TO YOUR LOCAL TYCO ELECTRONICS SALES OFFICE
 - 12. ALL DIMENSIONS ARE NOMINAL FOR REFERENCE ONLY UNLESS OTHERWISE STATED

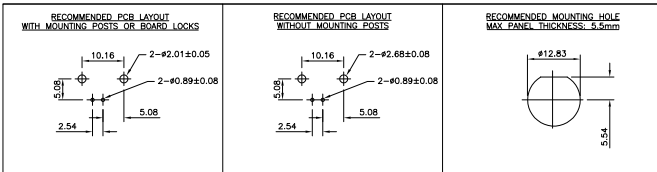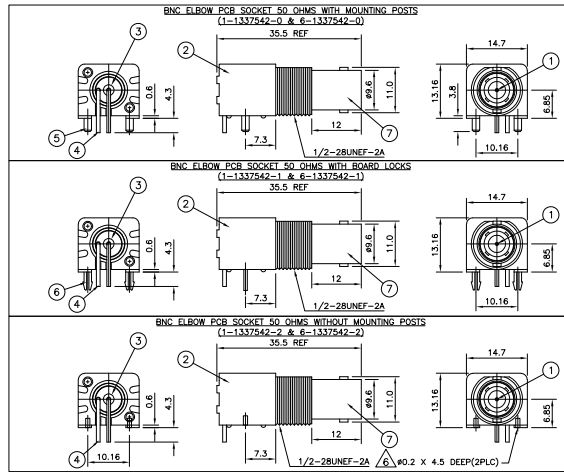

QTY	REF	ASSY	MATERIAL	DESCRIPTION	ITEM	
1	1	1	1	ZINC DIECAST	▲ BODY	7
-	-	2	2	BRASS	▲ BOARD LOCK	6
-	-	-	-	BRASS	▲ MOUNTING POST	5
1	1	1	1	BRASS	▲ SOLDER TAIL	4
1	1	1	1	PE-806	▲ INSULATOR	3
1	1	1	1	PBT WHITE	HOUSING	2
1	1	1	1	BRASS	▲ CONTACT	1
6-2	1-2	6-1	1-1	6-0	1-0	MATERIAL DESCRIPTION ITEM

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm TO DIMENSIONS UNLESS OTHERWISE SPECIFIED 0 PLC 1 PLC 2 PLC 3 PLC 4 PLS ANGLES FINISH	DIM: J SANDWELL CHK: S PARLOW DPC: F WHEELER-KING PRODUCT SPEC: 108-3435 APPLICATION SPEC: 108-3435 WEIGHT: -	03AUG05 03AUG05 03AUG05 NAME: BNC LOW PROFILE R/A INSULATED PCB SOCKET 50 OHM WHITE SIZE: A2 CASE CODE: 00779 DRAWING NO: 1337542 SCALE: NTS SHEET: 1 OF 1 REV: C	Tyco Electronics Corporation Bideford, UK, EX39 4HE RESTRICTED TO: - CUSTOMER DRAWING
---	--	--	--