


# SBD Type : EA60QC04

## OUTLINE DRAWING

### FEATURES

- \* TO-251AA Case
- \* Dual Diodes Cathode Common
- \* Low Forward Voltage drop
- \* Low Power Loss
- \* High Surge Capability
- \* 30 Volts thru 100 Volts Types Available

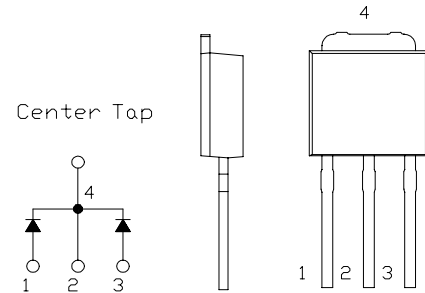

### Maximum Ratings

Approx Net Weight:0.35g


Rating		Symbol	EA60QC04			Unit
Repetitive Peak Reverse Voltage		$V_{RRM}$	40			V
Non-repetitive Peak Reverse Voltage		$V_{RSM}$	45			V
Average Rectified Output Current	P.C.Board mounted *	$I_O$	2.0	$T_a=20^{\circ}\text{C}$	50Hz Full Sine Wave Resistive Load	A
	-		6.0	$T_c=118^{\circ}\text{C}$		
RMS Forward Current		$I_{F(RMS)}$	6.66			A
Surge Forward Current		$I_{FSM}$	45	50Hz Full Sine Wave, 1cycle, Non-repetitive		A
Operating Junction Temperature Range		$T_{jw}$	- 40 to + 150			$^{\circ}\text{C}$
Storage Temperature Range		$T_{stg}$	- 40 to + 150			$^{\circ}\text{C}$

### Electrical • Thermal Characteristics


Characteristics		Symbol	Conditions	Min	Typ	Max	Unit
Peak Reverse Current		$I_{RM}$	$T_j=25^{\circ}\text{C}, V_{RM}=V_{RRM}$ per Arm	-	-	3.0	mA
Peak Forward Voltage		$V_{FM}$	$T_j=25^{\circ}\text{C}, I_{FM}= 3 \text{ A}$ per Arm	-	-	0.55	V
Thermal Resistance	Junction to Ambient	$R_{th(j-a)}$	P.C.Board mounted *	-	-	80	$^{\circ}\text{C/W}$
	Junction to Case	$R_{th(j-c)}$	-	-	-	5	$^{\circ}\text{C/W}$

\* Print Land = 20x20 mm



EA60QC04 OUTLINE DRAWING (Dimensions in mm)

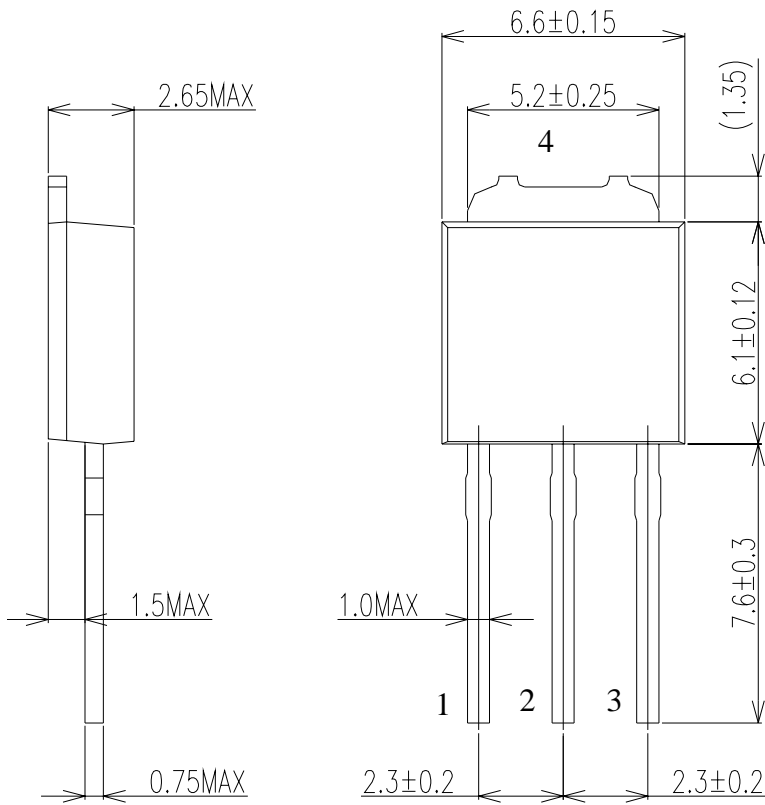


Center Tap

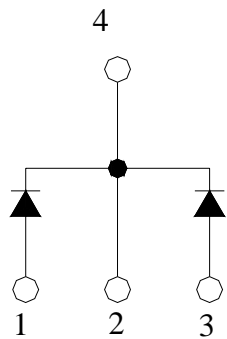

### FORWARD CURRENT VS. VOLTAGE

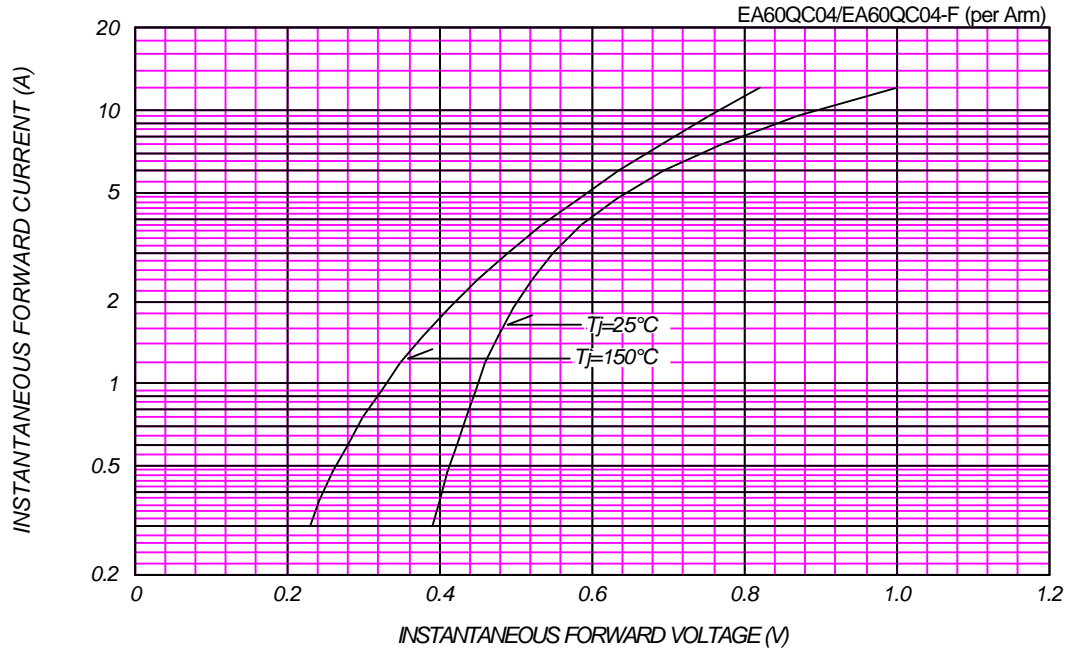


### AVERAGE FORWARD POWER DISSIPATION

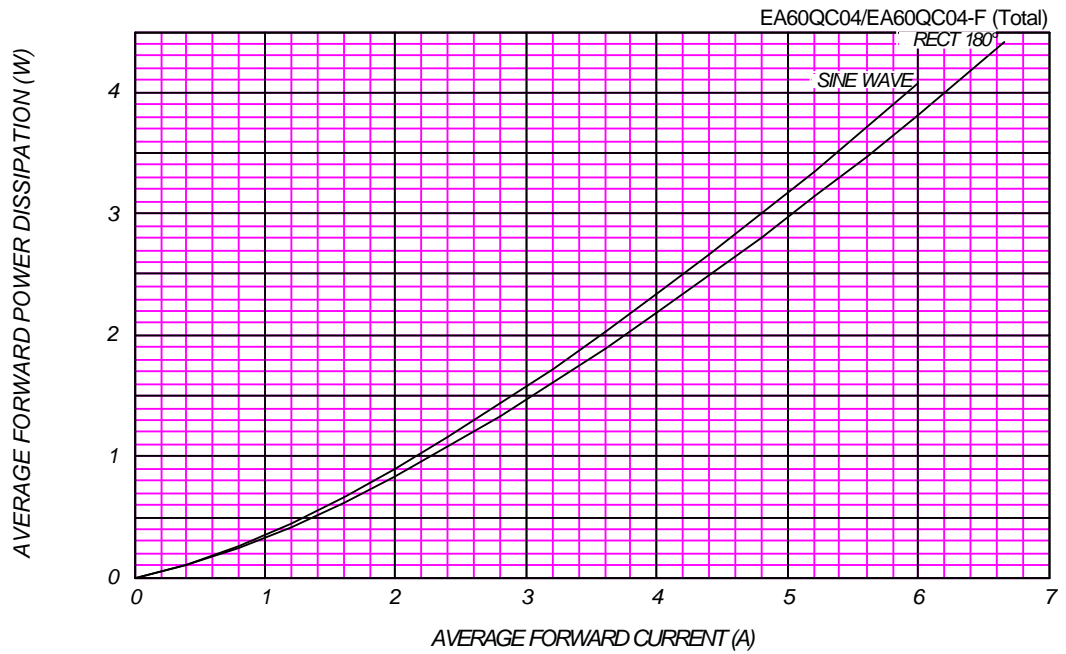

PEAK REVERSE CURRENT VS. PEAK REVERSE VOLTAGE


T<sub>j</sub> = 150 °C


EA60QC04/EA60QC04-F (per Arm)

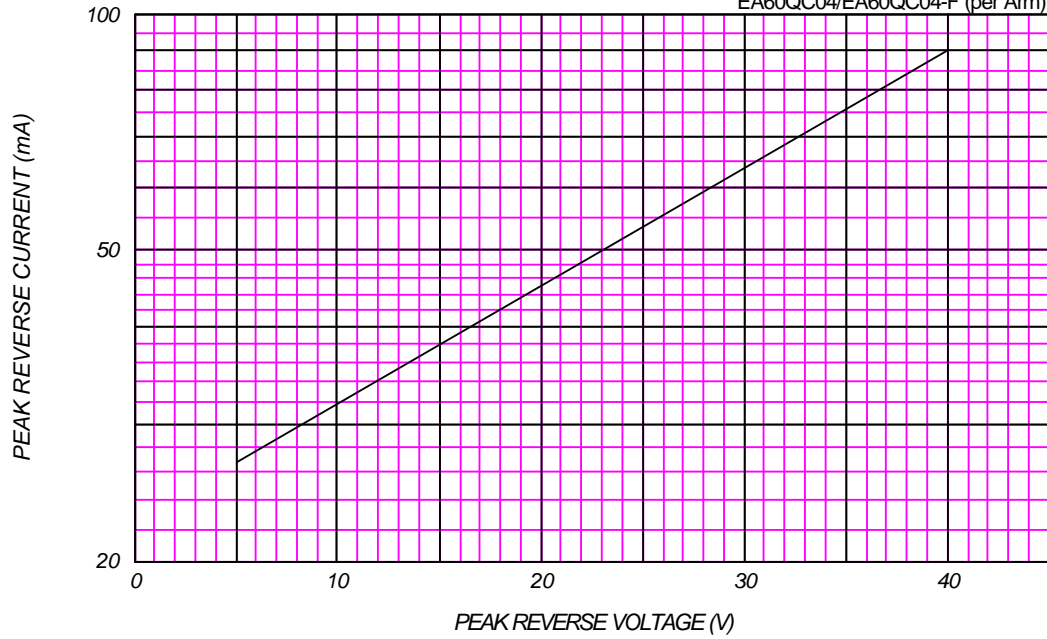

AVERAGE REVERSE POWER DISSIPATION



EA60QC04/EA60QC04-F (Total)

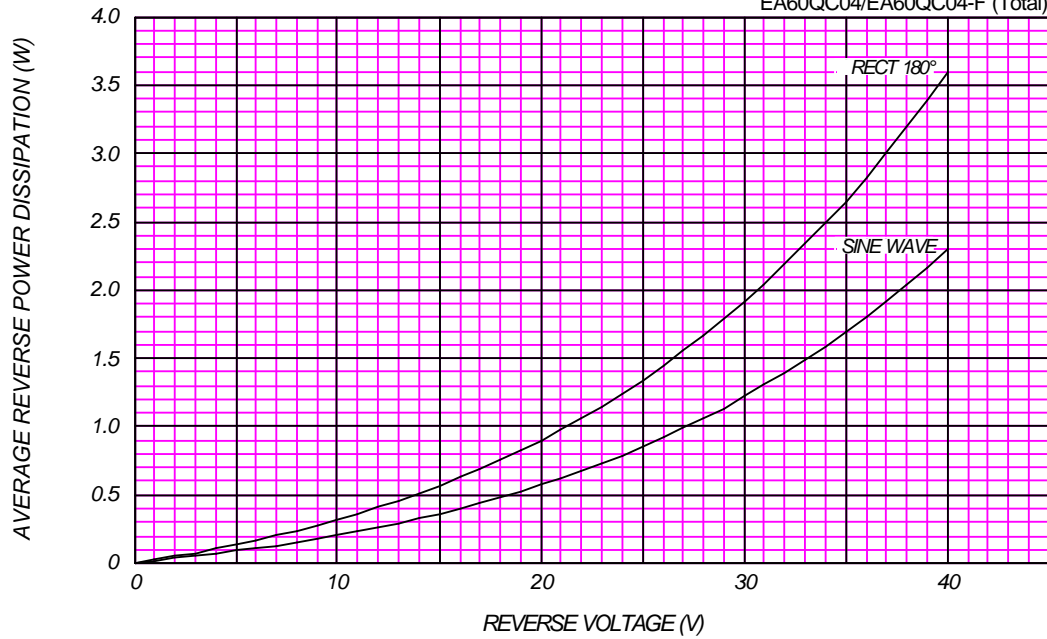




### AVERAGE FORWARD CURRENT VS. CASE TEMPERATURE

$V_{RM}=40\text{ V}$

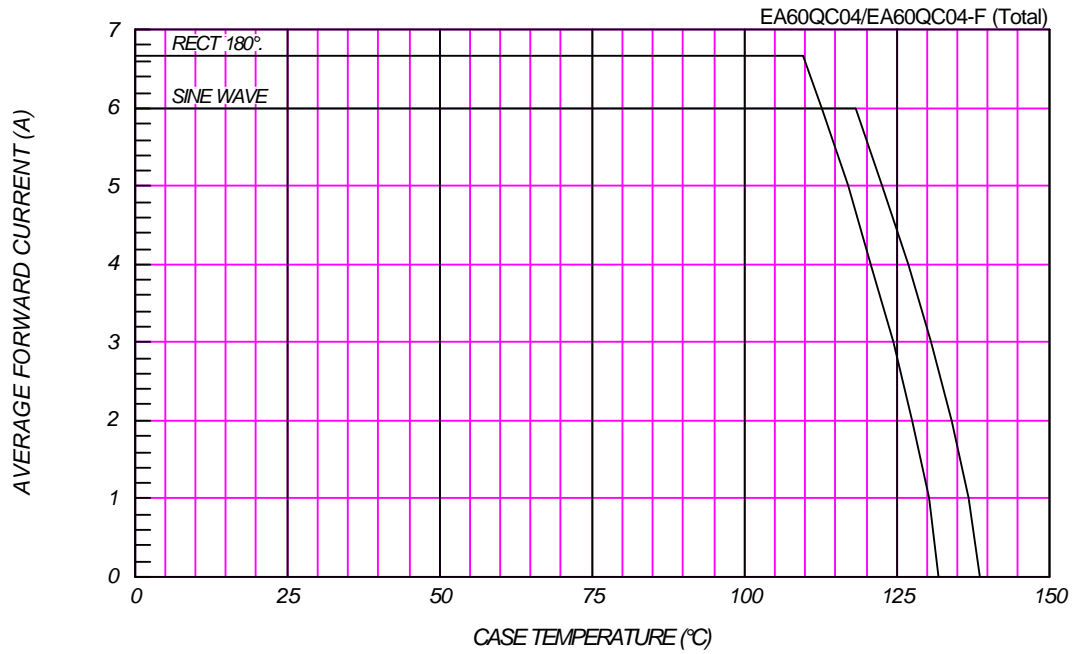

### AVERAGE FORWARD CURRENT VS. AMBIENT TEMPERATURE


P.C. Board mounted (Print land=20x20mm)

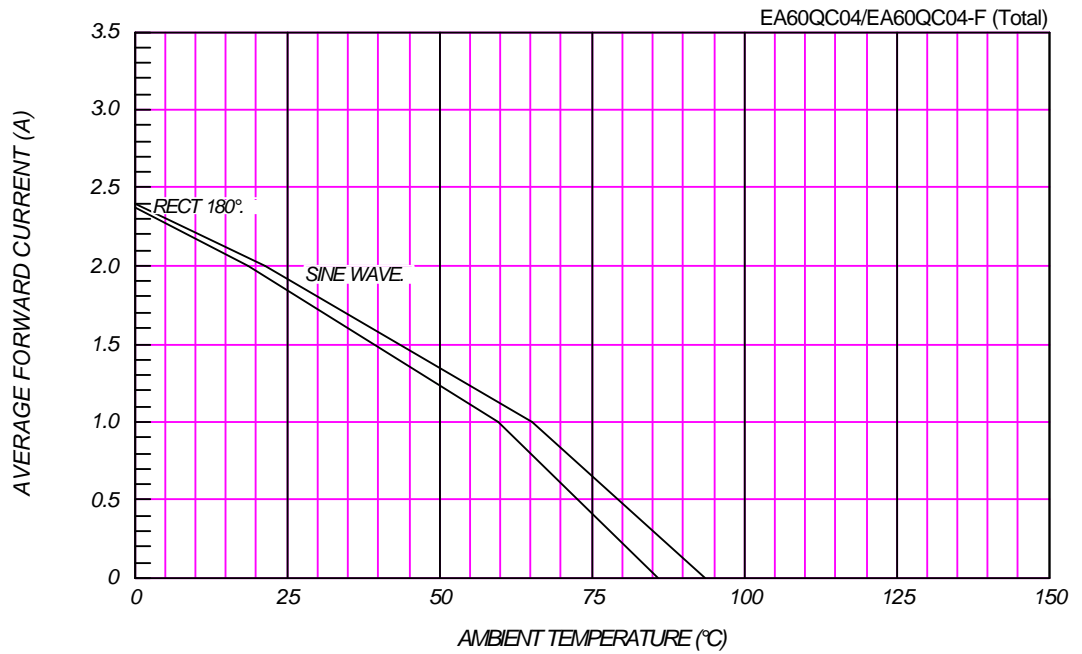

### SURGE CURRENT RATINGS

f=50Hz, Sine Wave, Non-Repetitive, No Load

EA60QC04/EA60QC04-F

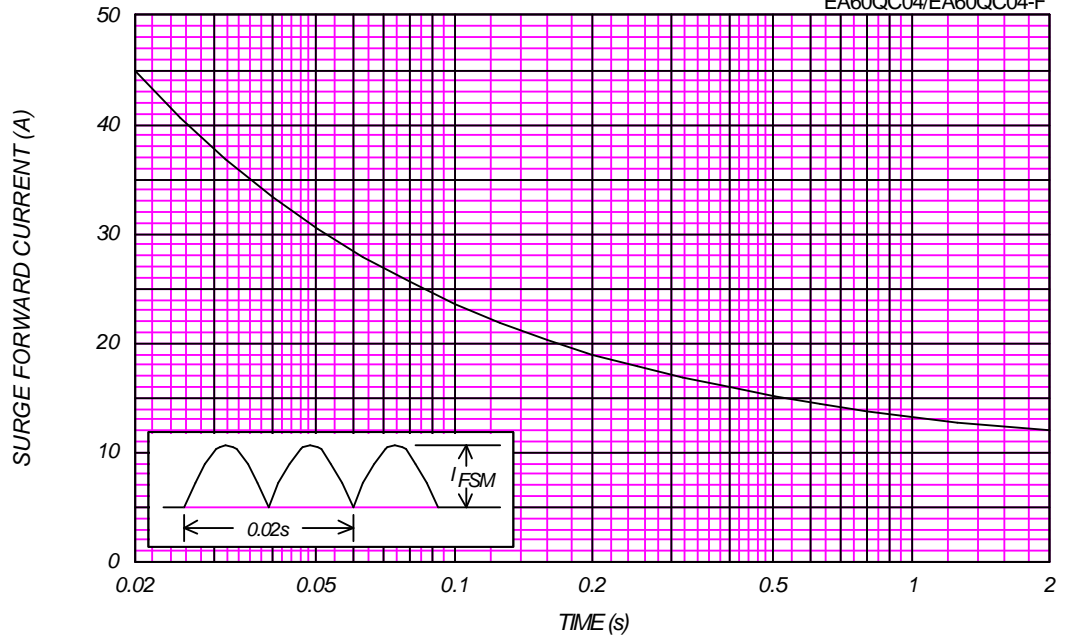

### JUNCTION CAPACITANCE VS. REVERSE VOLTAGE

$T_j=25^\circ\text{C}$ ,  $V_m=20\text{mV}_{RMS}$ ,  $f=100\text{kHz}$ , Typical Value

EA60QC04/EA60QC04-F (per Arm)

