










10 9 8 7 6 5 4 3 2 1

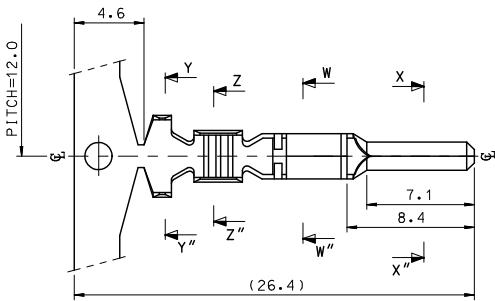

ISOMETRIC VIEW

NOTES.

1. MATERIAL : C BRASS, PRE-TIN PLATED
2. FINISH : 0.8~1.8 μm , Tin(Sn) plating overall
0.3~0.8 μm , Copper(Cu) plating
3. PRODUCT SPECIFICATION : PS-35150-001, PS-35180-002
PS-35180-003, PS-35524-001
4. CRIMPING SPECIFICATION : CS-35745-001
5. RECOMMENDED LENGTH OF WIRE STRIP IS 4.0~4.8mm

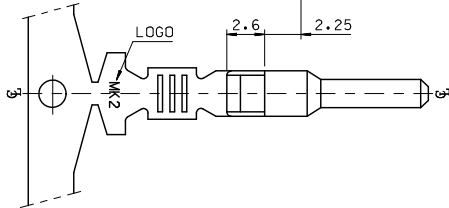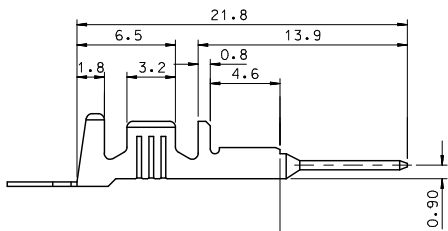

| MATERIAL NO | ENG. No. | AWG | a | b | c | d | PITCH "P" |
|-------------|------------|---------|------|------|------|-----|-----------|
| 357470210 | 35747-0210 | #18-#14 | 3.4 | 3.8 | 5.2 | 4.8 | 12.0 |
| 357470110 | 35747-0110 | #22-#20 | 2.85 | 2.8 | 4.2 | 4.0 | 10.6 |
| 357470410 | 35747-0410 | #24 | 2.2 | 1.75 | 3.85 | 3.5 | 10.6 |

| REVISED E.C. NO.: KOR2009-0151 T.D. NO.: HPAR001 CHYCD: 2009/06/18 APPR: YUNSIK/IM 2009/07/01 | QUALITY SYMBOLS ▽=0 ▽=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | DIMENSION STYLE MM ONLY | SCALE 4:1 | DESIGN UNITS METRIC | THIRD ANGLE PROJECTION | | | | | | | | | | | | | | | |
|---|-------------------------------|--|---|--------------------|---|------------------------|-------|-------|----------|-------|-------|----------|-------|-------|---------|-------|-------|--------------|--|--|----------------------|
| | | <table border="1"> <thead> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> </thead> <tbody> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± 0.2</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± 0.3</td> <td>± ---</td> </tr> <tr> <td colspan="3">ANGULAR ± 1°</td> </tr> </tbody> </table> | | mm | INCH | 4 PLACES | ± --- | ± --- | 3 PLACES | ± --- | ± --- | 2 PLACES | ± 0.2 | ± --- | 1 PLACE | ± 0.3 | ± --- | ANGULAR ± 1° | | | DRAWN BY JS. KANG |
| | mm | INCH | | | | | | | | | | | | | | | | | | | |
| 4 PLACES | ± --- | ± --- | | | | | | | | | | | | | | | | | | | |
| 3 PLACES | ± --- | ± --- | | | | | | | | | | | | | | | | | | | |
| 2 PLACES | ± 0.2 | ± --- | | | | | | | | | | | | | | | | | | | |
| 1 PLACE | ± 0.3 | ± --- | | | | | | | | | | | | | | | | | | | |
| ANGULAR ± 1° | | | | | | | | | | | | | | | | | | | | | |
| DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | SEE TABLE | APPROVED BY C.W. LEE | DATE 1998/01/19 | MOLEX INCORPORATED DOCUMENT NO. SD-35747-001 | | | | | | | | | | | | | | | | |
| | | MATERIAL NO. | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | SHEET NO. 1 OF 01 | | | | | | | | | | | | | | | | |

9 8 7 6 5 4 3 2 1