


Surface Mount Type **SP-Cap**

Series: **CD**

Japan




- Features Excellent Noise-absorbent Characteristics
Low profile type (1.8mm Height)


■Specification

Operating Temp. Range	-40 to +105°C	
Rated W.V Range	2 to 16 V. DC	
Nominal Cap.Range	2.2 to 100 μF	
Capacitance Tolerance	±20 % (120 Hz / +20°C)	
DC Leakage Current	$I \leq 0.04 CV$ or $3 (\mu A)$ 2 minutes (whichever is the greater) (2 W.V. to 4 W.V : $I \leq 0.06 CV$)	
Dissipation Factor	≤ 0.06 (120 Hz / +20°C)	
Surge Voltage	Rated Working Voltage x 1.25 (15 to 35°C)	
Endurance	After applying rated working voltage for 1000 hours at +105 ±2 °C, and then being stabilized at +20°C, capacitor shall meet the following limits.	
	Capacitance change	± 10 % of initial measured value
	D.F.	\leq Initial specified value
Moisture resistance	After storing for 500 hours at +60°C, 90%R.H.	
	Capacitance change	+40%,-20% of initial measured value(2, 2.5W.V.:+70%,-20%, 4W.V.:+60%,-20% 6.3W.V.:+50%,-20%)
	D.F.	≤ 200 % of initial specified value
	DC leakage current	\leq Initial specified value

■Marking



■Dimensions in mm (not to scale)

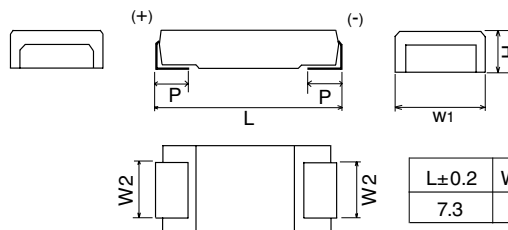

L±0.2	W1±0.2	W2±0.1	H±0.1	P±0.3
7.3	4.3	2.4	1.8	1.3

■Standard product

Rated W.V. (V.DC)	Capacitance (± 20%) (μF)	Specification		Part number	Min.Packaging Q'ty (pcs)
		Ripple current (A r.m.s./100kHz +20 to +105°C)	Impedance Ω (400kHz/+20°C)		
2	100	1.6	0.04	EEFCD0D101R	3500
2.5	82	1.6	0.04	EEFCD0E820R	3500
4	56	1.6	0.04	EEFCD0G560R	3500
6.3	10	1.0	0.13	EEFCD0J100R	3500
	22	1.3	0.09	EEFCD0J220R	3500
	33	1.6	0.06	EEFCD0J330R	3500
	47	1.6	0.05	EEFCD0J470R	3500
8	8.2	1.0	0.14	EEFCD0K8R2R	3500
	15	1.3	0.11	EEFCD0K150R	3500
	22	1.6	0.09	EEFCD0K220R	3500
	33	1.6	0.06	EEFCD0K330R	3500
12.5	4.7	1.0	0.18	EEFCD1B4R7R	3500
	10	1.0	0.13	EEFCD1B100R	3500
	15	1.3	0.11	EEFCD1B150R	3500
	22	1.3	0.09	EEFCD1B220R	3500
16	2.2	1.0	0.38	EEFCD1C2R2R	3500
	4.7	1.0	0.18	EEFCD1C4R7R	3500
	6.8	1.0	0.15	EEFCD1C6R8R	3500
	8.2	1.0	0.14	EEFCD1C8R2R	3500

Design and specifications are subject to change without notice. Ask factory for technical specifications before purchase and/or use.
Whenever a doubt about safety arises from this product, please contact us immediately for technical consultation.