

Tyco / Electronics
Raychem Circuit Protection
 308 Constitution Drive
 Menlo Park, CA 94025-1164
 Phone: 800-227-4856
 Fax: 800-227-4866

PolySwitch®
PTC Devices
 Overcurrent Protection Device

PRODUCT: TSV250-130

DOCUMENT: SCD 24453
 PCN: 649488
 REV LETTER: J
 REV DATE: OCTOBER 24, 2002
 PAGE NO.: 1 OF 1

Specification Status: RELEASED

Max Electrical Rating at 20°C

Operating Voltage: 60V_{DC}
Fault Voltage: 250V_{RMS}
Interrupt Current: 3A_{RMS}

Lead Material: Tin plated brass

Marking:

XX ——— Raychem Logo
 T13V ——— Part Identification

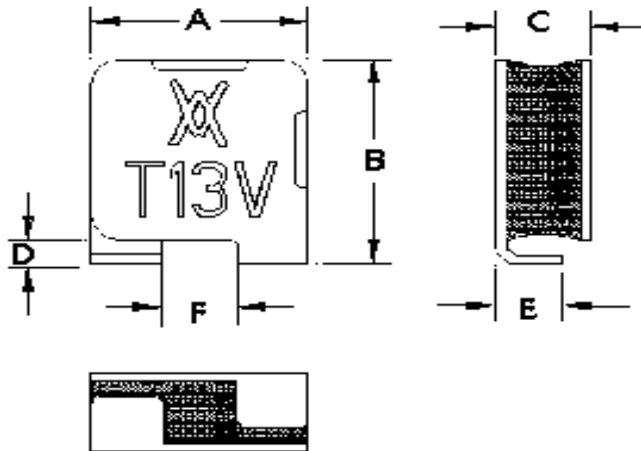


TABLE I. DIMENSIONS:

	A		B		C		D		E		F	
	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max
mm:	--	6.1	-	6.9	--	3.2	0.56	--	--	1.9	1.6	2.3
in:	--	(0.240)	--	(0.270)	--	(0.126)	(0.022)	--	--	(0.075)	(0.065)	(0.091)

TABLE II. PERFORMANCE RATINGS @ 20°C (unless otherwise noted):

I _{HOLD} (A)	RESISTANCE (Ω)			TIME TO TRIP(s) @ 1A TYP	OPERATING TEMPERATURE (°C)		TRIPPED STATE POWER DISSIPATION (W) TYP
	R MIN	R MAX	R _{1 MAX} *		MIN	MAX	
20°C 0.130	4.0	7.0	12.0	2.0	-40	85	1.5

*Maximum device resistance at 20°C measured 1 hour post trip or 24 hours post reflow.

Additional Ratings @ 20°C

Lightning Withstand: ITU at 1.5kV Storage Temperature: -40° to 85° C

Agency Recognition: UL, CSA, TUV
 Reference Documents: PS300
 Precedence: This specification takes precedence over documents referenced herein.
 Effectivity: Reference documents shall be the issue in effect on the date of invitation for bid.
 CAUTION: Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.