

# UNR211x Series (UN211x Series)

## Silicon PNP epitaxial planar type

For digital circuits

### ■ Features


- Costs can be reduced through downsizing of the equipment and reduction of the number of parts
- Mini type package allowing easy automatic insertion through tape packing and magazine packing

### ■ Resistance by Part Number


	Marking Symbol (R <sub>1</sub> )	(R <sub>2</sub> )
• UNR2110 (UN2110)	6L	47 kΩ —
• UNR2111 (UN2111)	6A	10 kΩ 10 kΩ
• UNR2112 (UN2112)	6B	22 kΩ 22 kΩ
• UNR2113 (UN2113)	6C	47 kΩ 47 kΩ
• UNR2114 (UN2114)	6D	10 kΩ 47 kΩ
• UNR2115 (UN2115)	6E	10 kΩ —
• UNR2116 (UN2116)	6F	4.7 kΩ —
• UNR2117 (UN2117)	6H	22 kΩ —
• UNR2118 (UN2118)	6I	0.51 kΩ 5.1 kΩ
• UNR2119 (UN2119)	6K	1 kΩ 10 kΩ
• UNR211D (UN211D)	6M	47 kΩ 10 kΩ
• UNR211E (UN211E)	6N	47 kΩ 22 kΩ
• UNR211F (UN211F)	6O	4.7 kΩ 10 kΩ
• UNR211H (UN211H)	6P	2.2 kΩ 10 kΩ
• UNR211L (UN211L)	6Q	4.7 kΩ 4.7 kΩ
• UNR211M (UN211M)	EI	2.2 kΩ 47 kΩ
• UNR211N (UN211N)	EW	4.7 kΩ 47 kΩ
• UNR211T (UN211T)	EY	22 kΩ 47 kΩ
• UNR211V (UN211V)	FC	2.2 kΩ 2.2 kΩ
• UNR211Z (UN211Z)	FE	4.7 kΩ 22 kΩ

### ■ Absolute Maximum Ratings T<sub>a</sub> = 25°C

Parameter	Symbol	Rating	Unit
Collector-base voltage (Emitter open)	V <sub>CBO</sub>	-50	V
Collector-emitter voltage (Base open)	V <sub>CEO</sub>	-50	V
Collector current	I <sub>C</sub>	-100	mA
Total power dissipation	P <sub>T</sub>	200	mW
Junction temperature	T <sub>j</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C

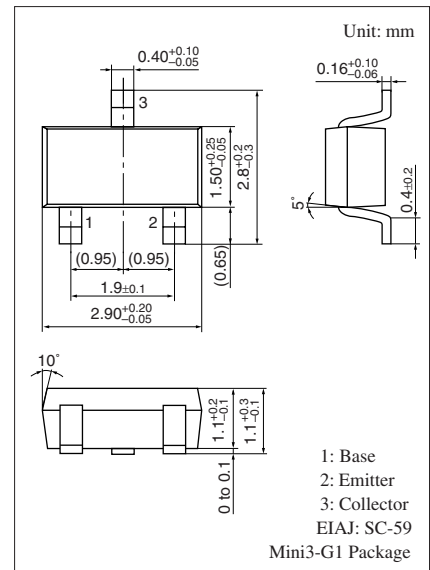

### Internal Connection

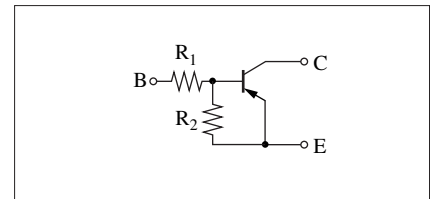

Note) The part numbers in the parenthesis show conventional part number.

■ Electrical Characteristics  $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$ 

Parameter		Symbol	Conditions	Min	Typ	Max	Unit
Collector-base voltage (Emitter open)		$V_{CBO}$	$I_C = -10 \mu\text{A}, I_E = 0$	-50			V
Collector-emitter voltage (Base open)		$V_{CEO}$	$I_C = -2 \text{mA}, I_B = 0$	-50			V
Collector-base cutoff current (Emitter open)		$I_{CBO}$	$V_{CB} = -50 \text{V}, I_E = 0$			-0.1	$\mu\text{A}$
Collector-emitter cutoff current (Base open)		$I_{CEO}$	$V_{CE} = -50 \text{V}, I_B = 0$			-0.5	$\mu\text{A}$
Emitter-base cutoff current (Collector open)	UNR2110/2115/2116/2117	$I_{EBO}$	$V_{EB} = -6 \text{V}, I_C = 0$			-0.01	mA
	UNR2113					-0.1	
	UNR2112/2114/211D/ 211E/211M/211N/211T					-0.2	
	UNR211Z					-0.4	
	UNR2111					-0.5	
	UNR211F/211H					-1.0	
	UNR2119					-1.5	
	UNR2118/211L/211V					-2.0	
Forward current transfer ratio	UNR211V	$h_{FE}$	$V_{CE} = -10 \text{V}, I_C = -5 \text{mA}$	6		20	—
	UNR2118/211L			20			
	UNR2119/211D/211F/211H			30			
	UNR2111			35			
	UNUNR2112/211E			60			
	UNR211Z			60	200		
	UNR2113/2114/211M			80			
	UNR211N/211T			80	400		
	UNR2110*/2115*/2116*/2117*			160	460		
Collector-emitter saturation voltage		$V_{CE(sat)}$	$I_C = -10 \text{mA}, I_B = -0.3 \text{mA}$			-0.25	V
	UNR211V		$I_C = -10 \text{mA}, I_B = -1.5 \text{mA}$				
Output voltage high-level		$V_{OH}$	$V_{CC} = -5 \text{V}, V_B = -0.5 \text{V}, R_L = 1 \text{k}\Omega$	-4.9			V
Output voltage low-level		$V_{OL}$	$V_{CC} = -5 \text{V}, V_B = -2.5 \text{V}, R_L = 1 \text{k}\Omega$			-0.2	V
			$V_{CC} = -5 \text{V}, V_B = -3.5 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -10 \text{V}, R_L = 1 \text{k}\Omega$				
			$V_{CC} = -5 \text{V}, V_B = -6 \text{V}, R_L = 1 \text{k}\Omega$				
Transition frequency		$f_T$	$V_{CB} = -10 \text{V}, I_E = 1 \text{mA}, f = 200 \text{MHz}$		80		MHz
			$V_{CB} = -10 \text{V}, I_E = 2 \text{mA}, f = 200 \text{MHz}$		150		
Input resistance	UNR2118	$R_i$		-30%	0.51	+30%	k $\Omega$
	UNR2119				1.0		
	UNR211H/211M/211V				2.2		
	UNR2116/211F/211L/211N/211Z				4.7		
	UNR2111/2114/2115				10		
	UNR2112/2117/211T				22		
	UNR2110/2113/211D/211E				47		

Note) 1. Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

2. \*: Rank classification


Rank	Q	R	S	No-rank
$h_{FE}$	160 to 260	210 to 340	290 to 460	160 to 460

■ Electrical Characteristics (continued)  $T_a = 25^\circ\text{C} \pm 3^\circ\text{C}$




Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Resistance ratio	UNR211M	$R_1/R_2$		0.047		—
	UNR211N			0.1		
	UNR2118/2119		0.08	0.10	0.12	
	UNR211Z			0.21		
	UNR2114		0.17	0.21	0.25	
	UNR211H		0.17	0.22	0.27	
	UNR211T			0.47		
	UNR211F		0.37	0.47	0.57	
	UNR211V			1.0		
	UNR2111/2112/2113/211L		0.8	1.0	1.2	
	UNR211E		1.70	2.14	2.60	
	UNR211D		3.7	4.7	5.7	




Note) Measuring methods are based on JAPANESE INDUSTRIAL STANDARD JIS C 7030 measuring methods for transistors.

Common characteristics chart






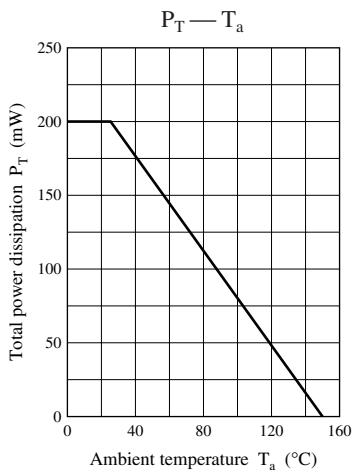


Characteristics charts of UNR2110

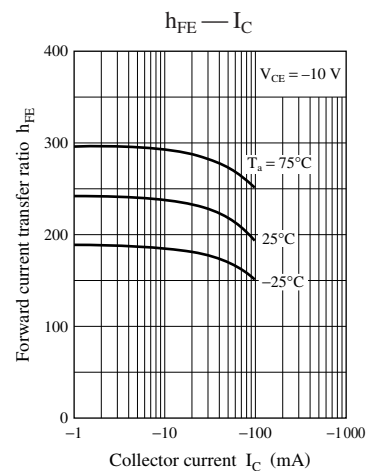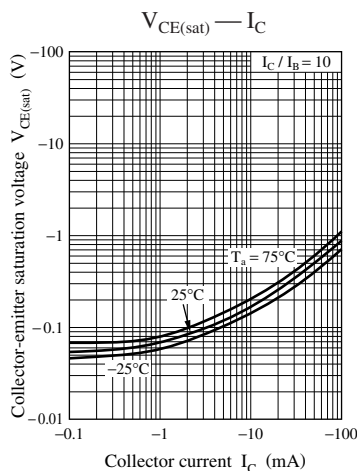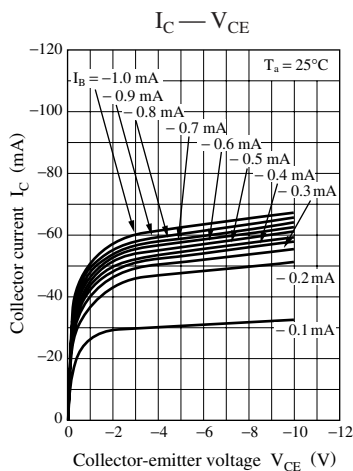


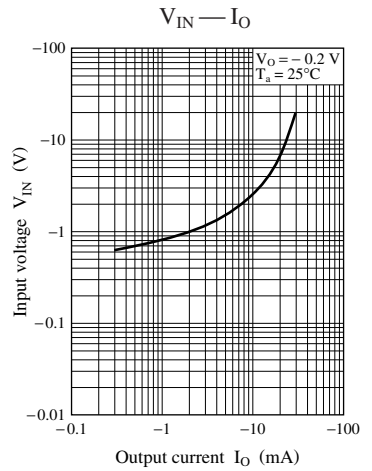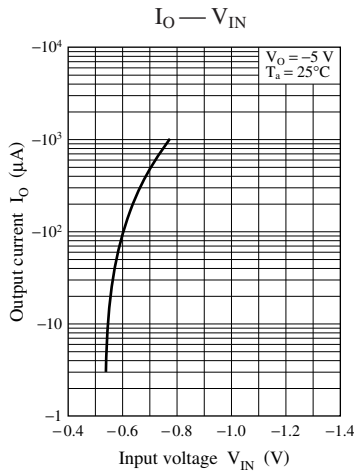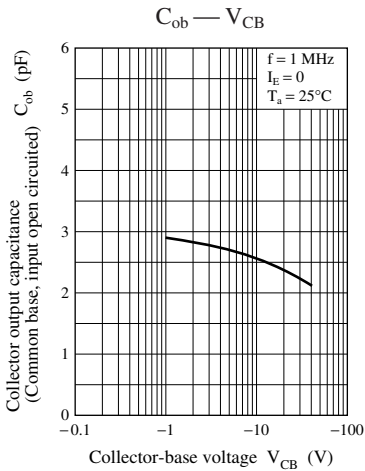


Characteristics charts of UNR2111

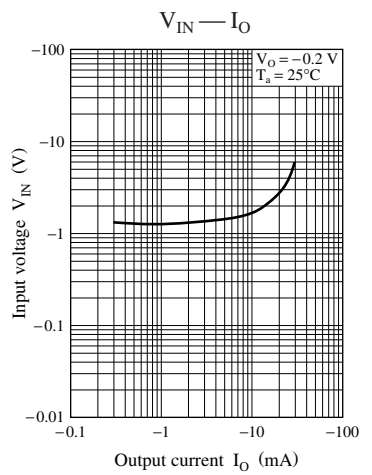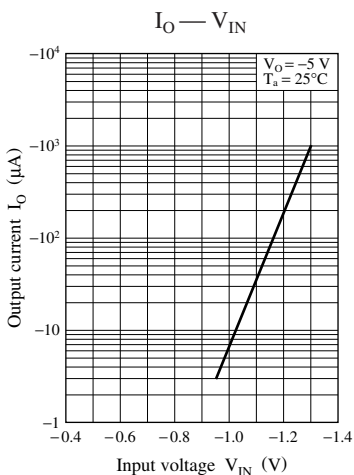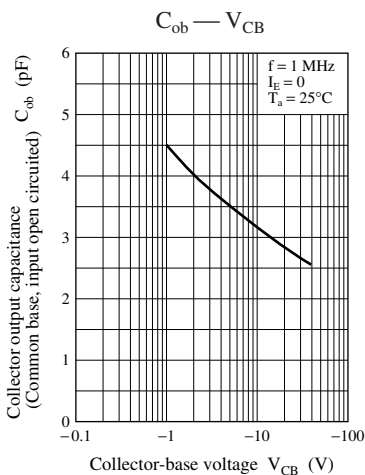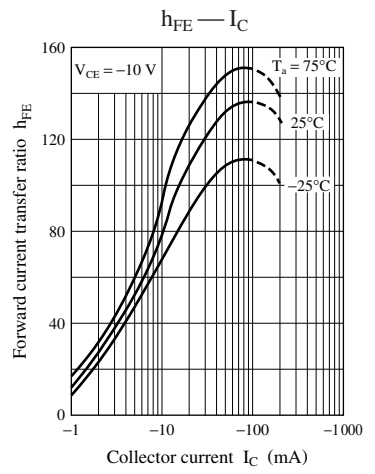
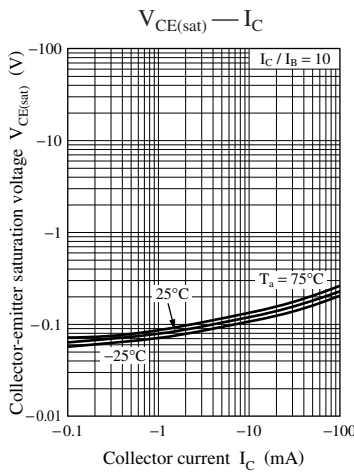
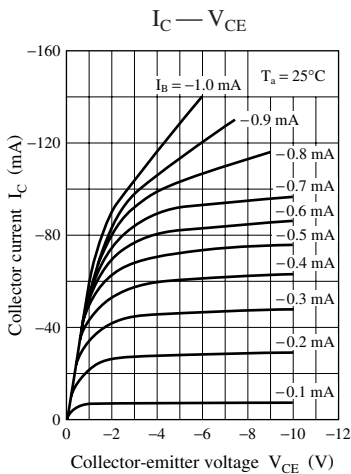


**Characteristics charts of UNR2112**






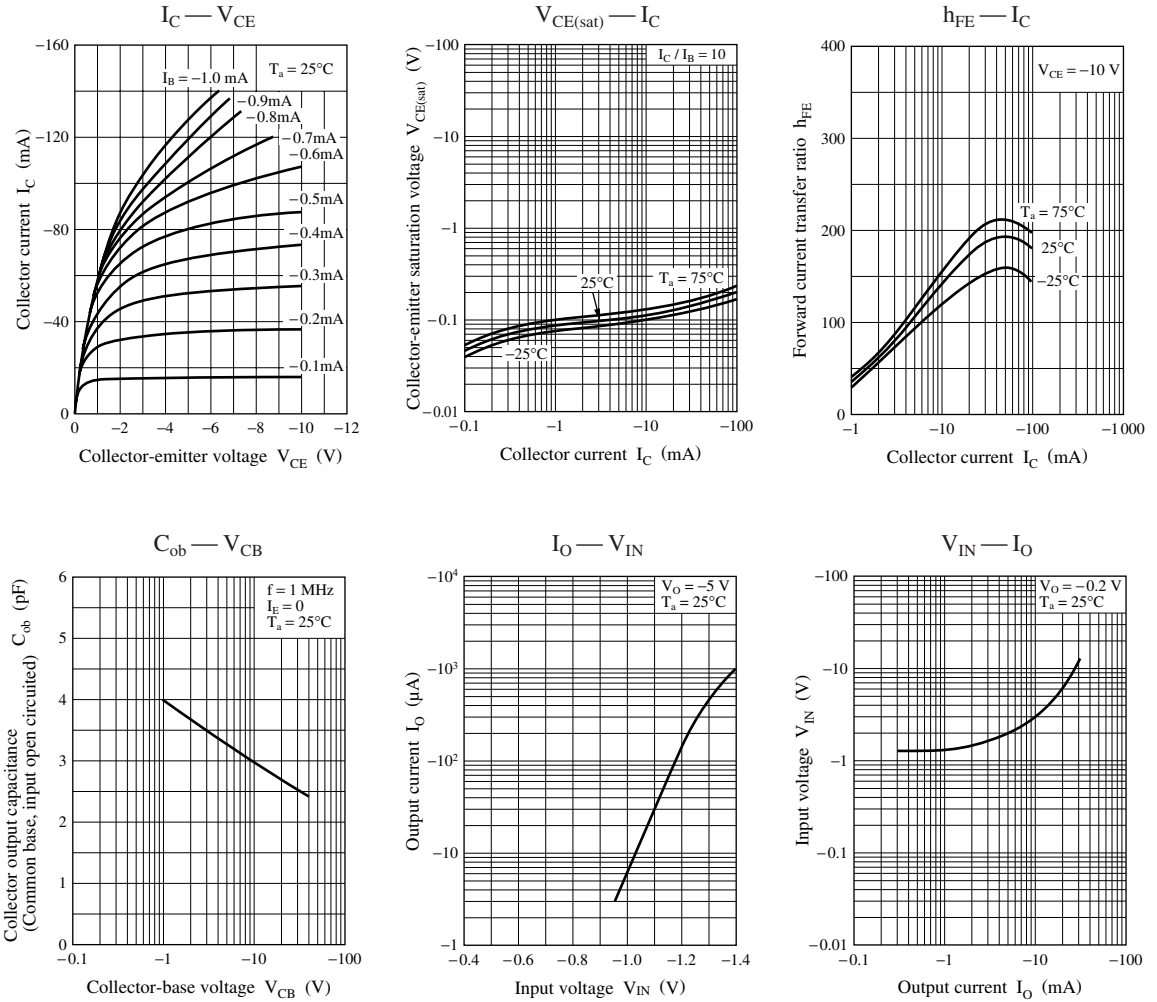


**Characteristics charts of UNR2113**






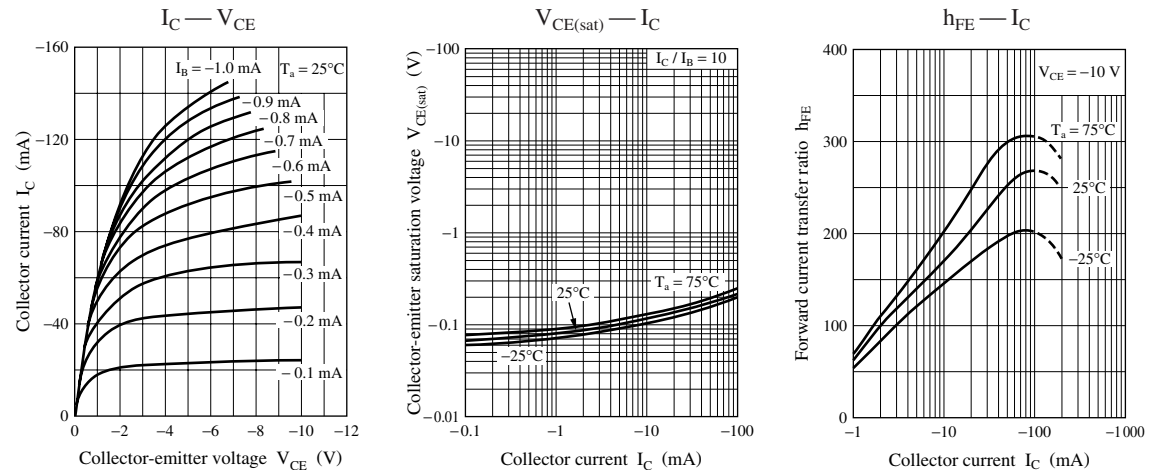


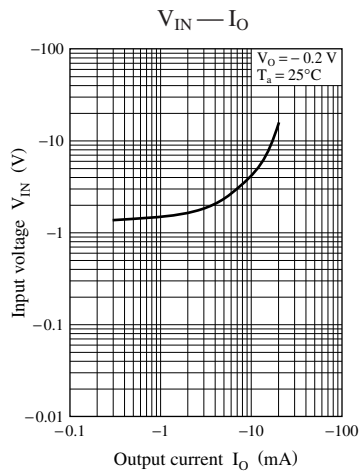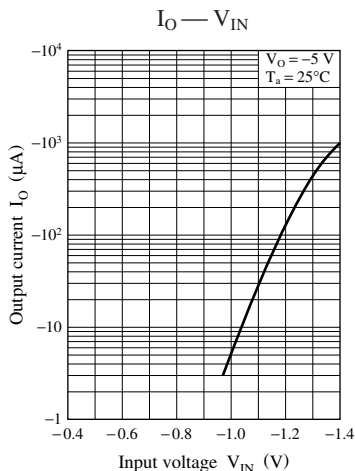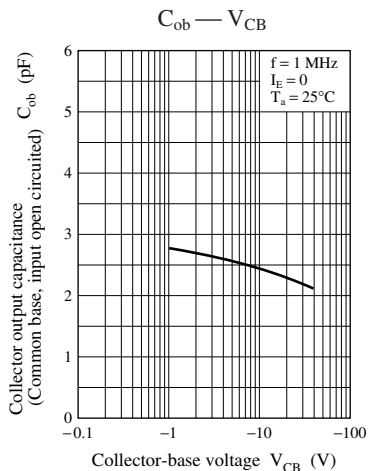




Characteristics charts of UNR2114

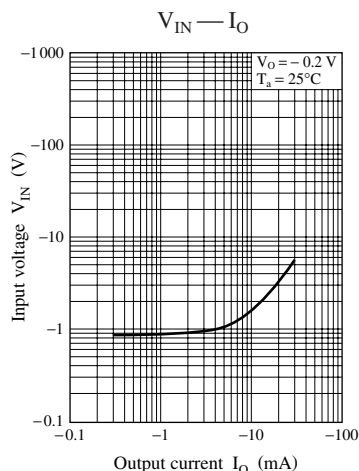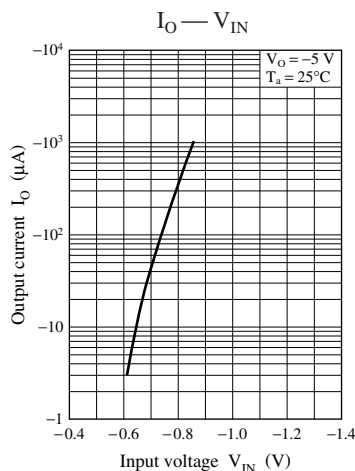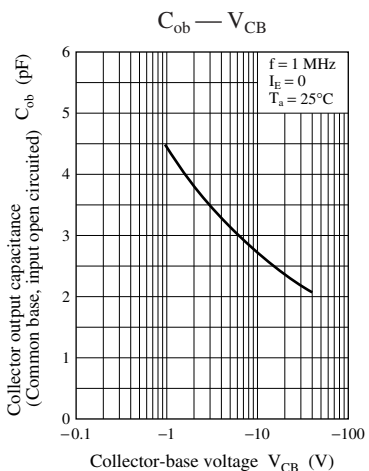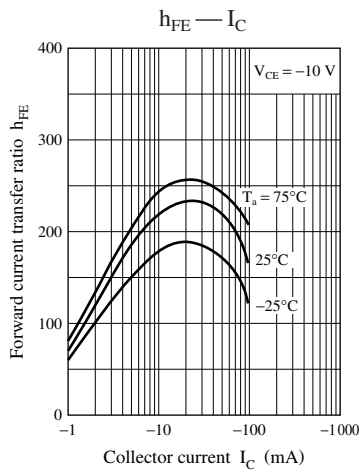
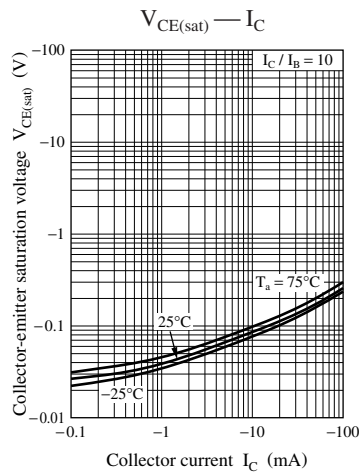
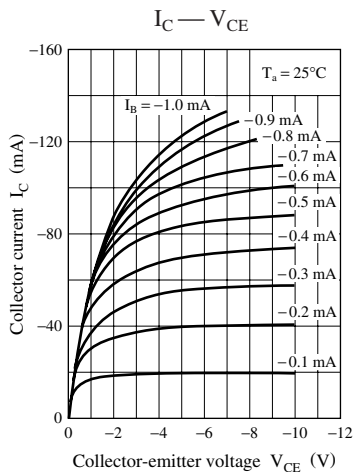


**Characteristics charts of UNR2115**

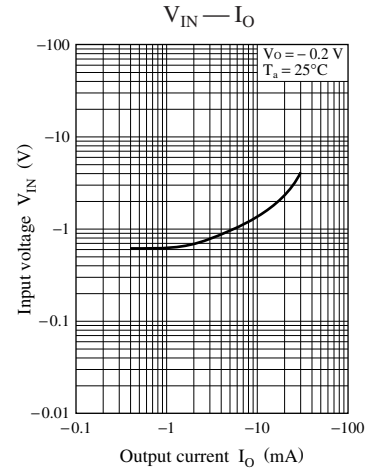
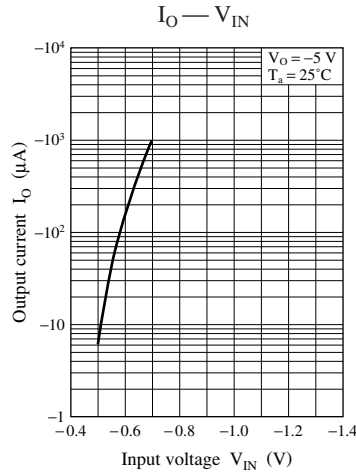
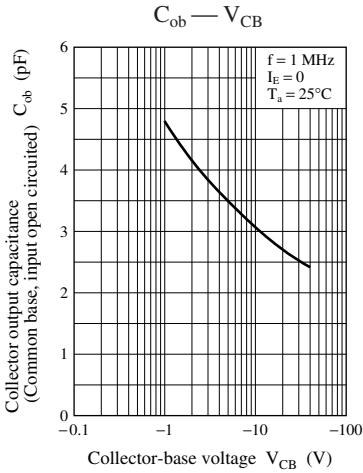
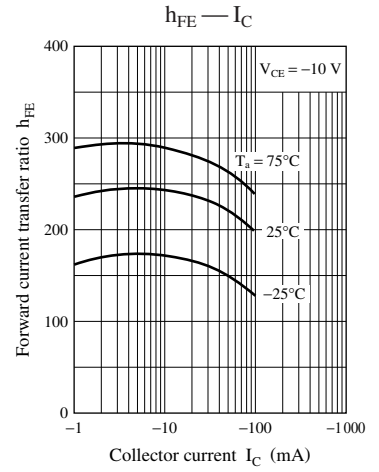
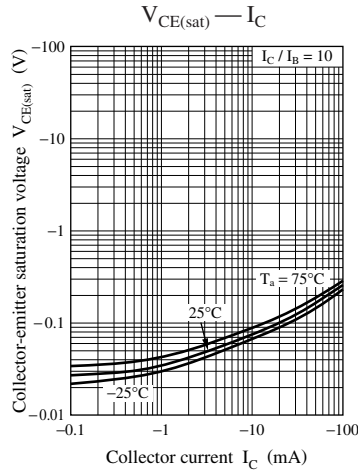
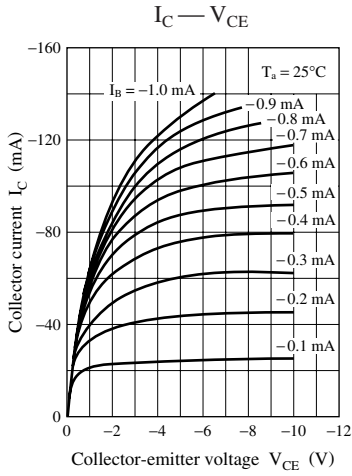


**Characteristics charts of UNR2116**

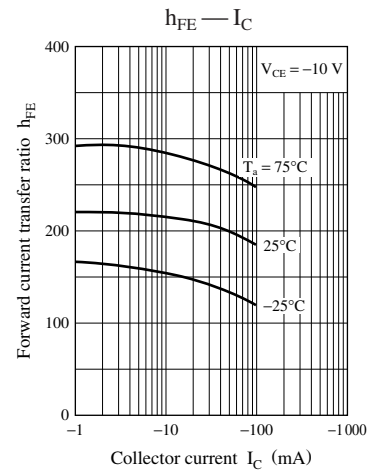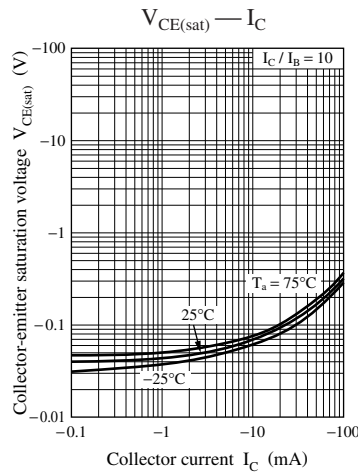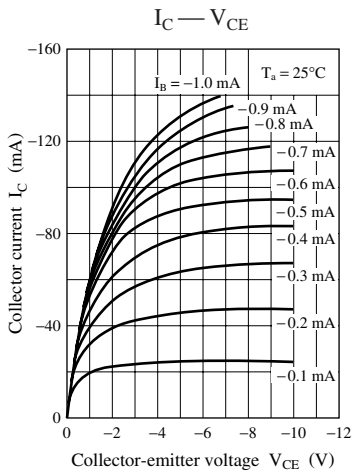




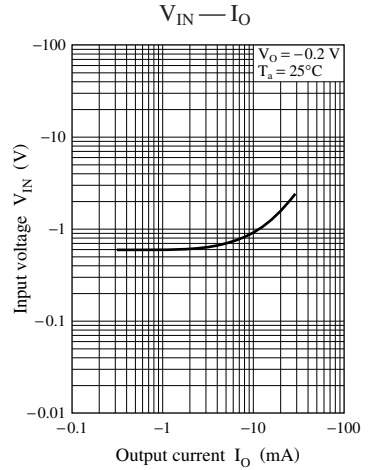
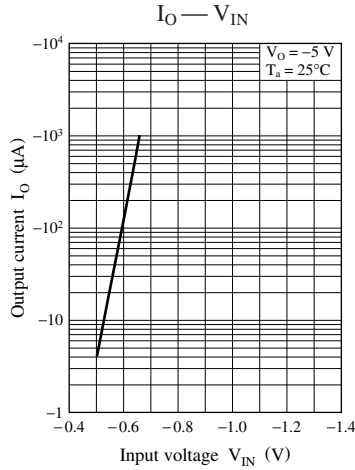
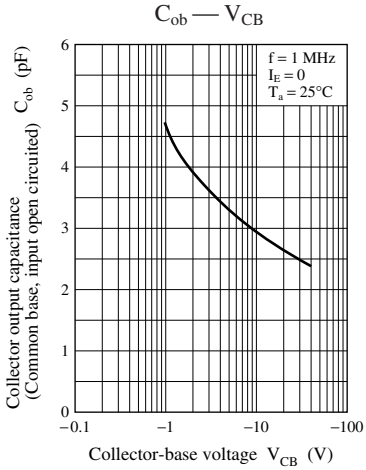


Characteristics charts of UNR2117

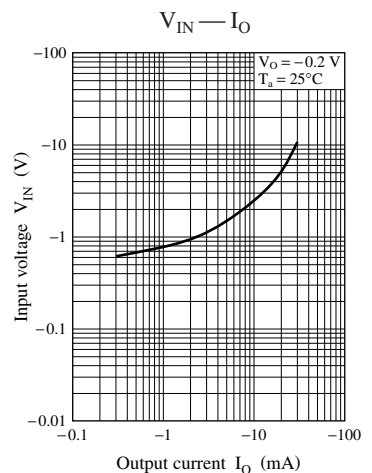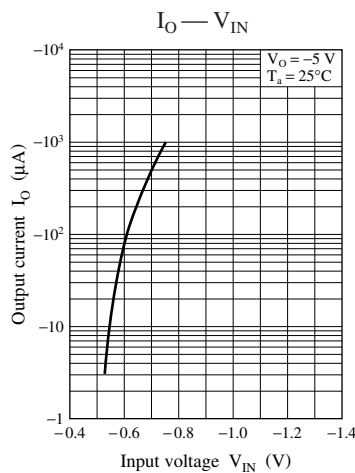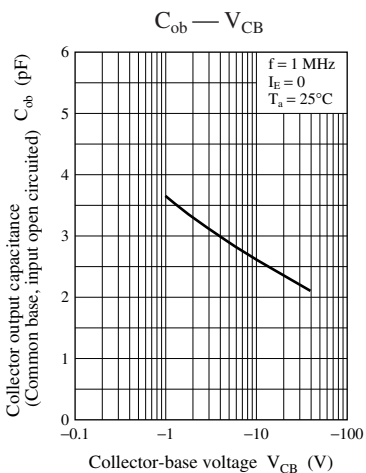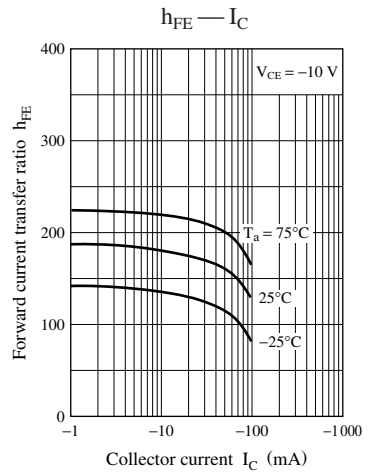
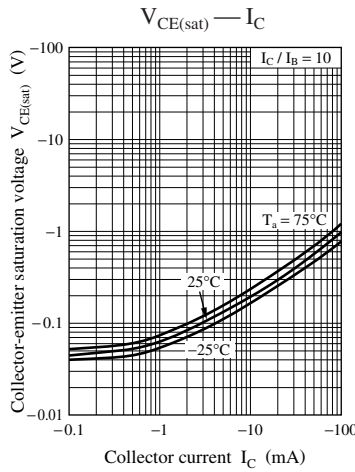
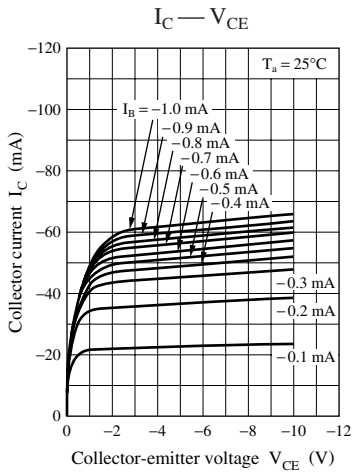







**Characteristics charts of UNR2118**

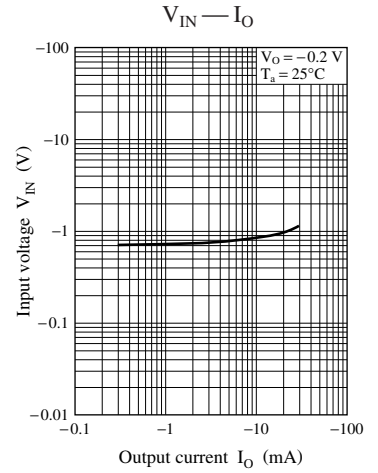
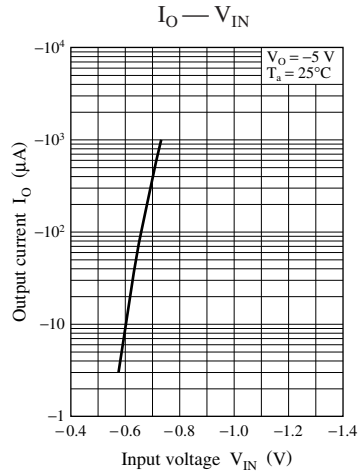
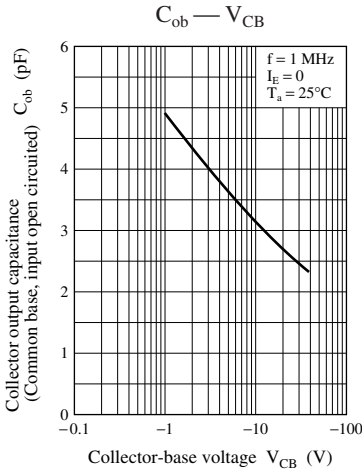
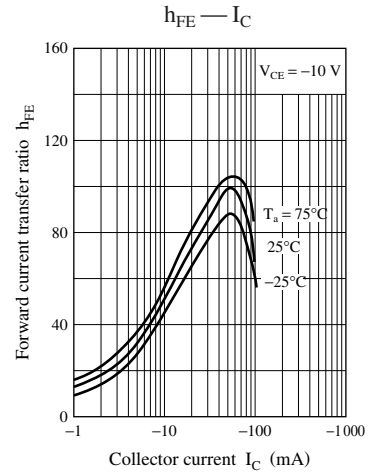
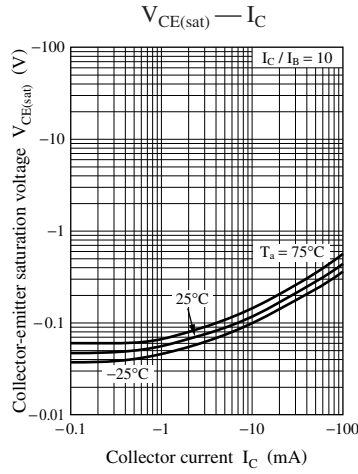
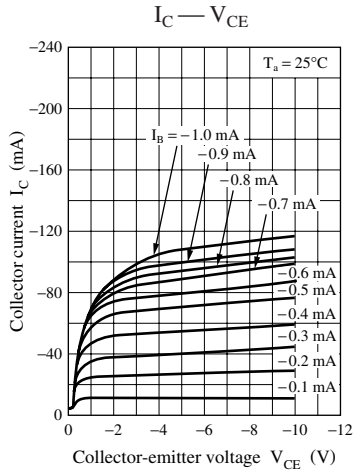


**Characteristics charts of UNR2119**




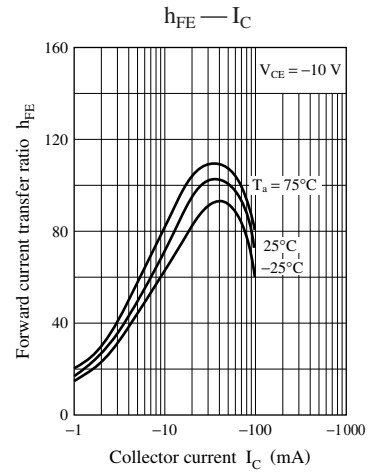
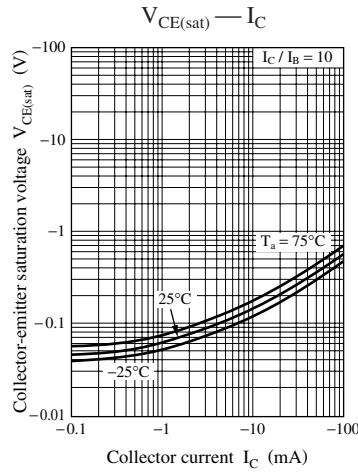
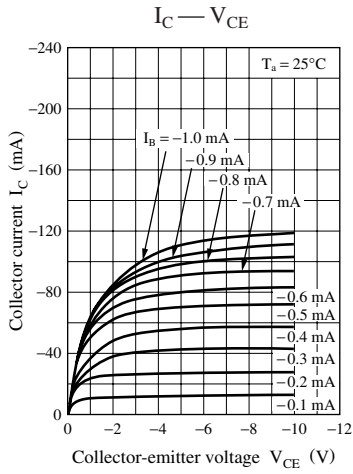


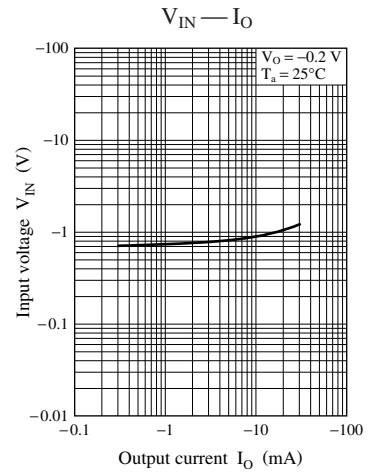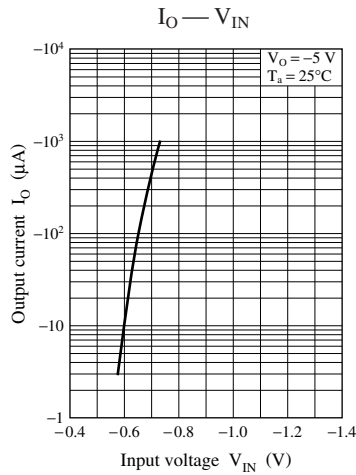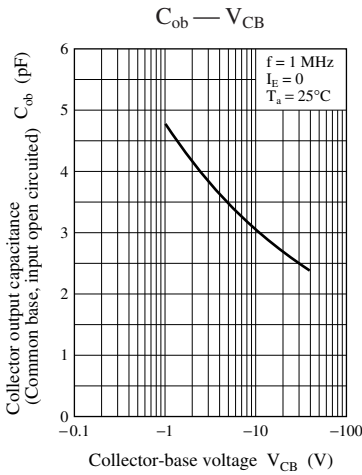




Characteristics charts of UNR211D

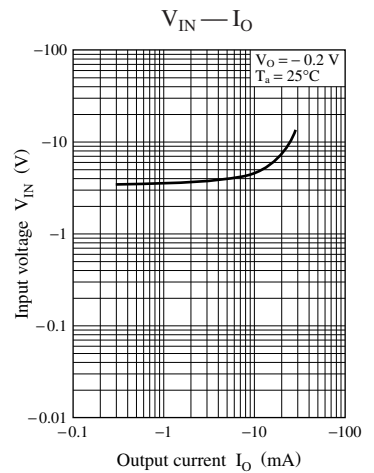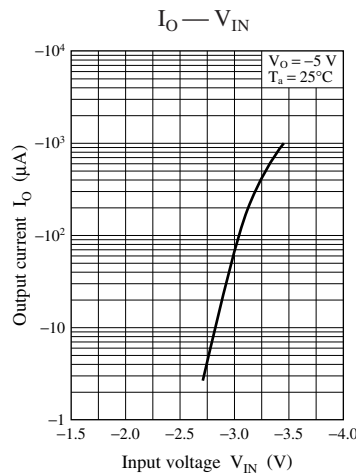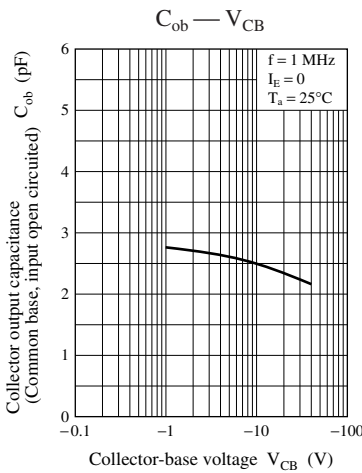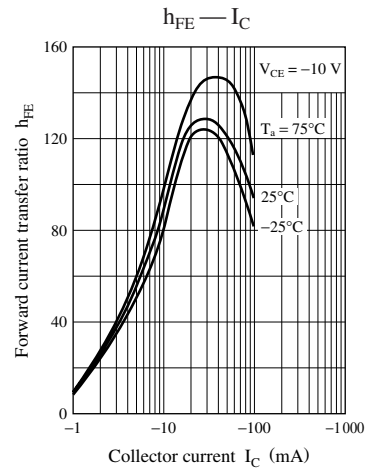
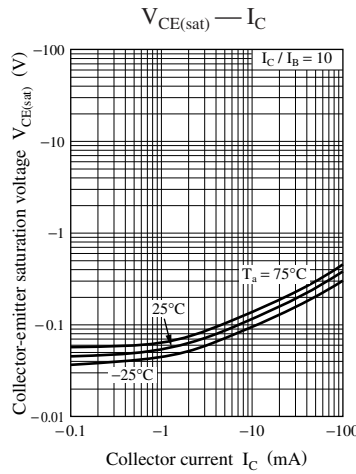
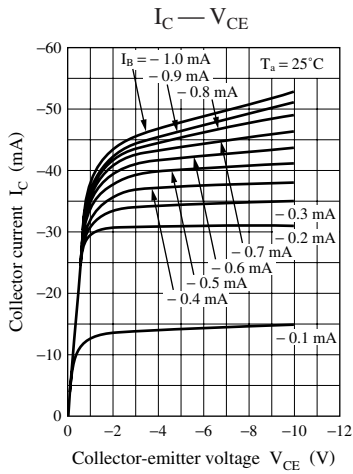


**Characteristics charts of UNR211E**

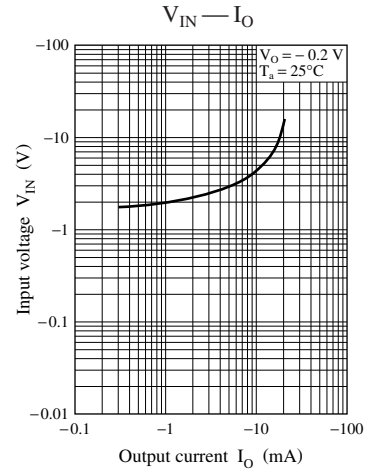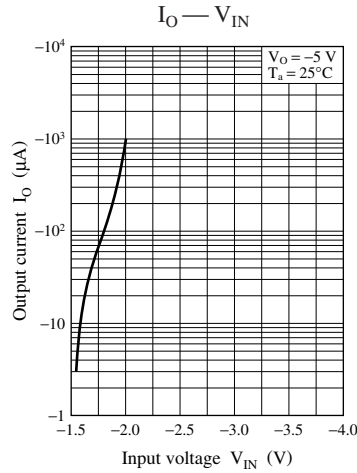
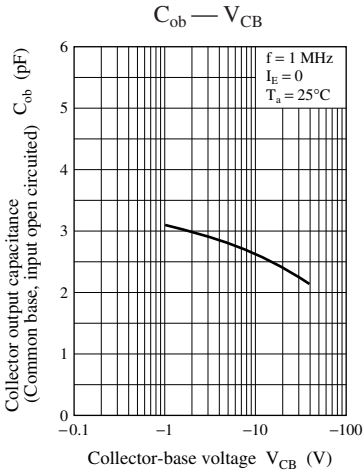
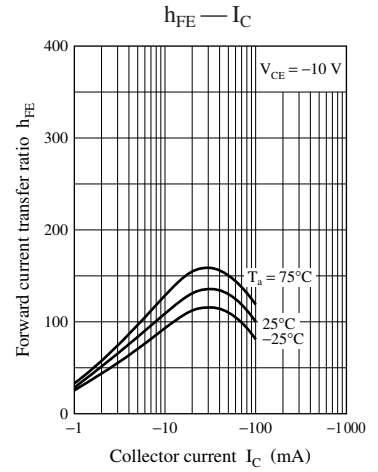
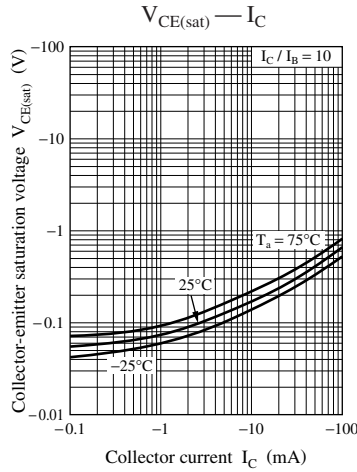
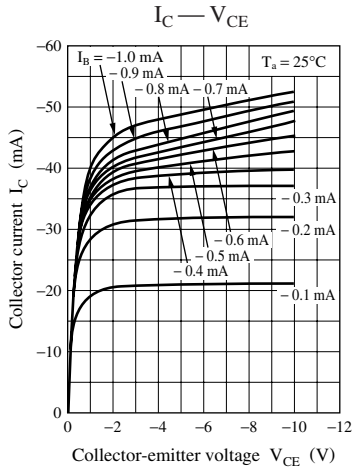


**Characteristics charts of UNR211F**

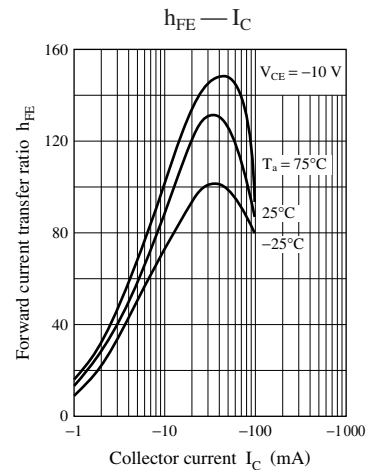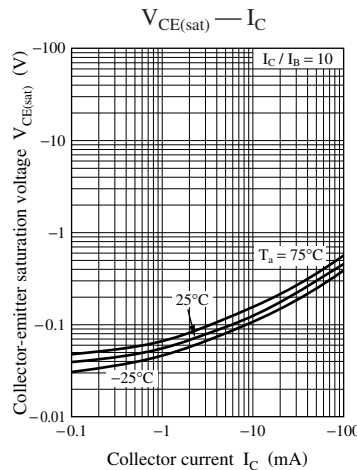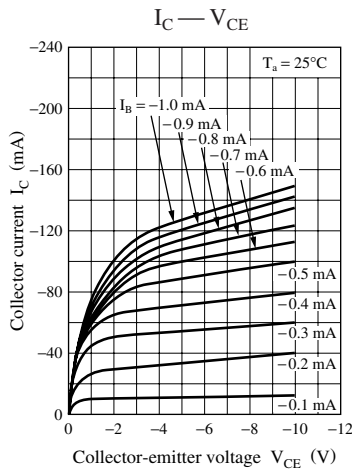


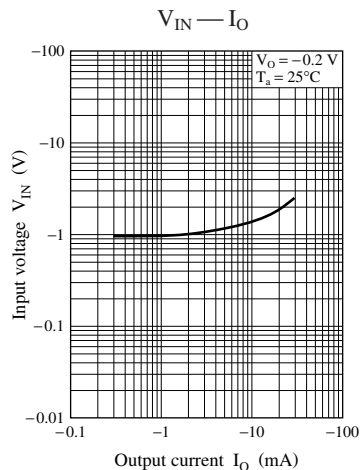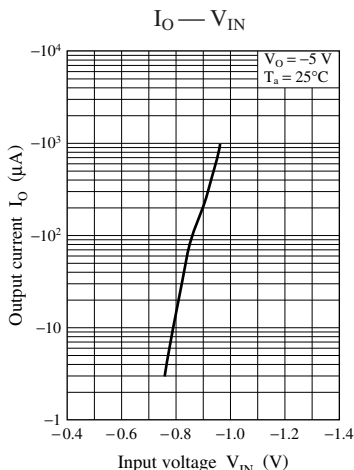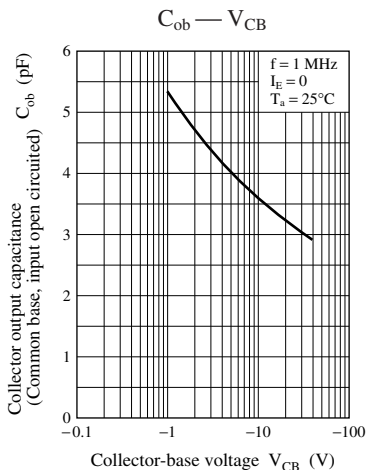


Characteristics charts of UNR211H

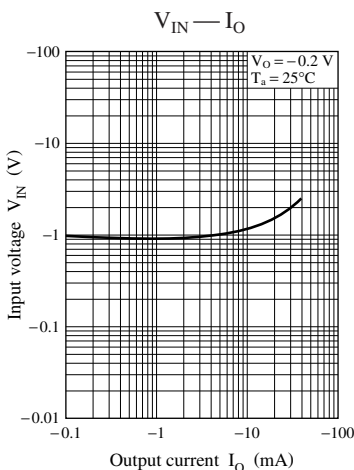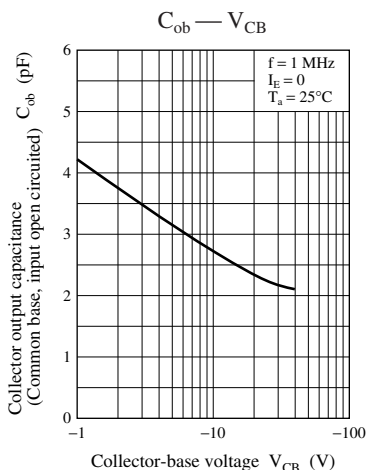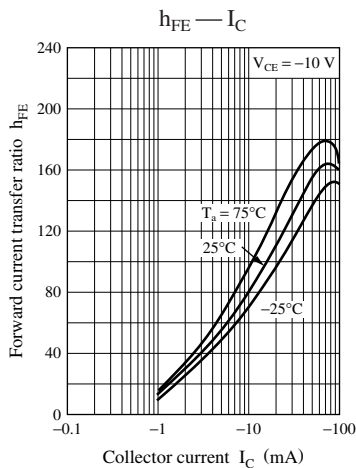
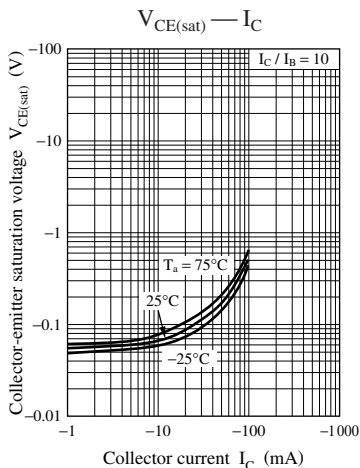
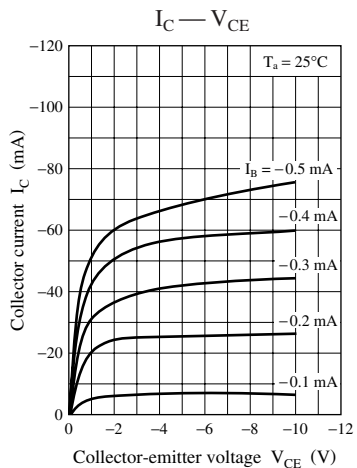


Characteristics charts of UNR211L






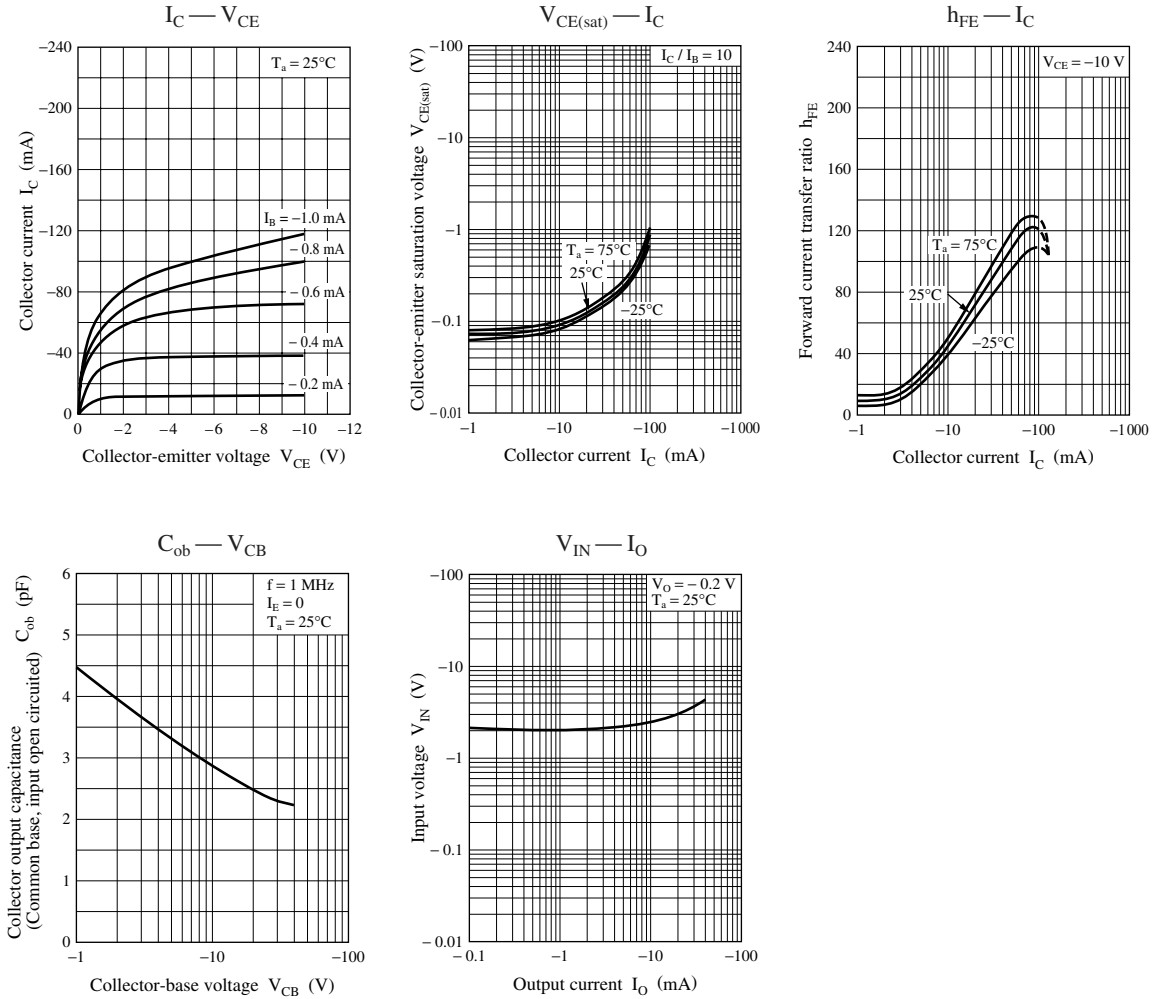


Characteristics charts of UNR211M





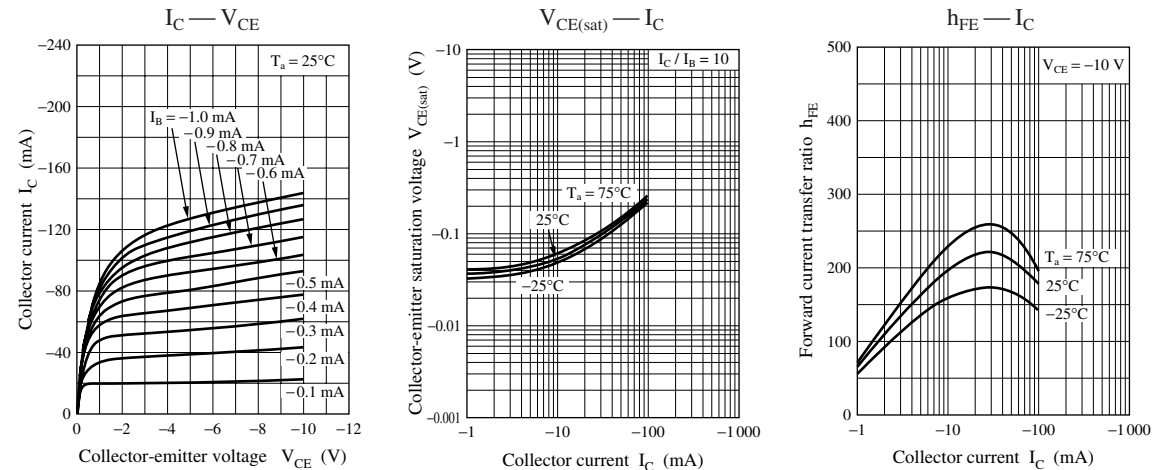


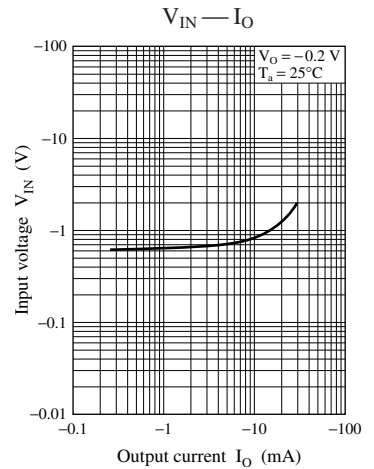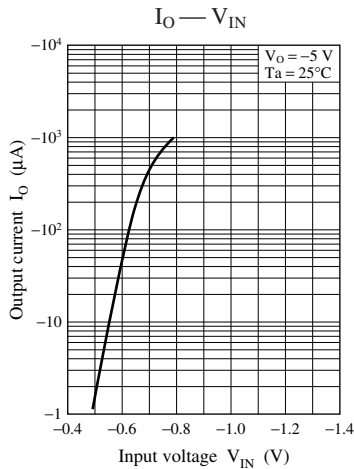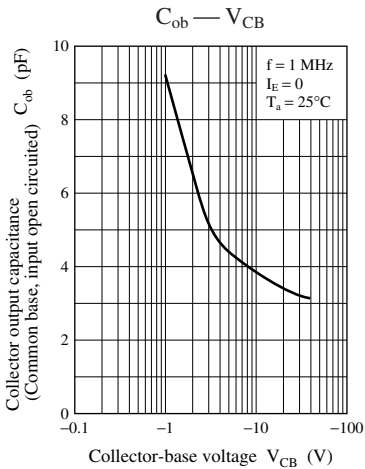




Characteristics charts of UNR211N

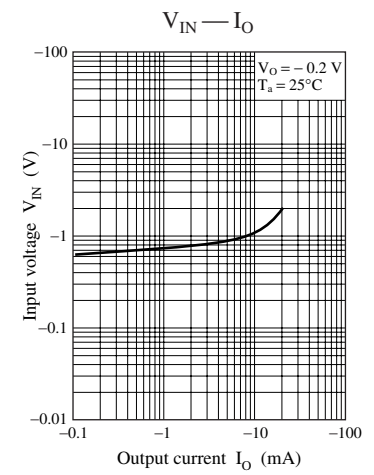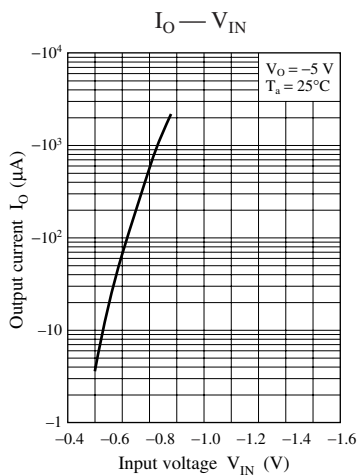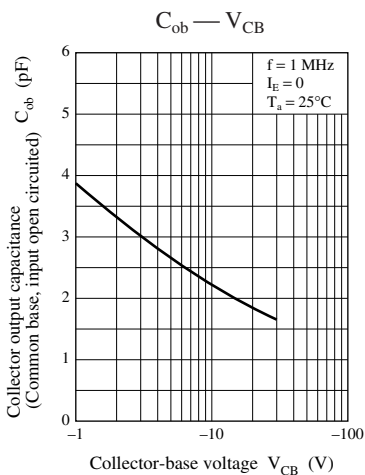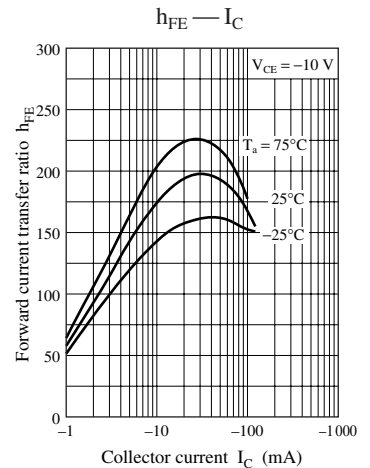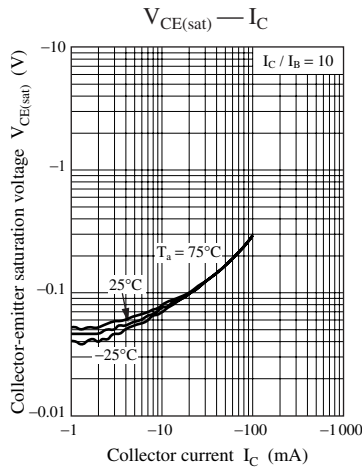
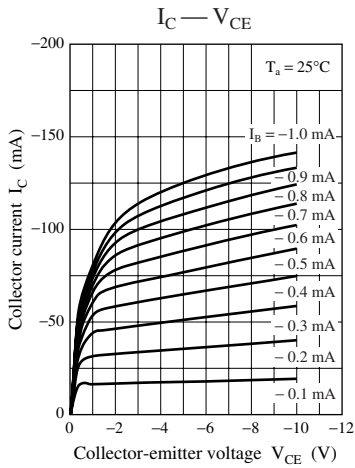


**Characteristics charts of UNR211T**


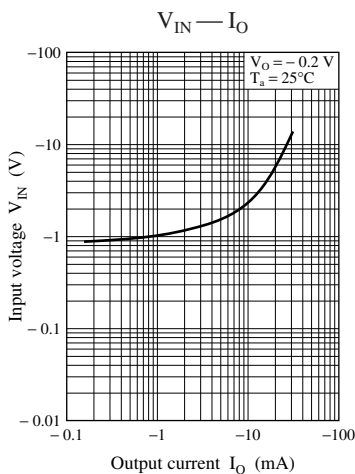
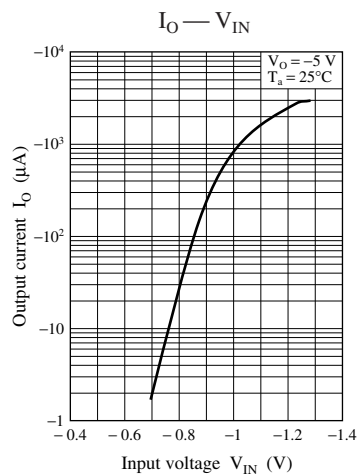
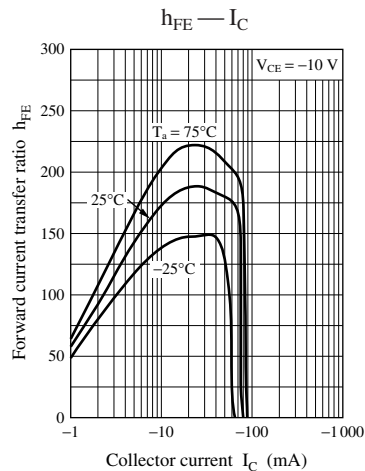
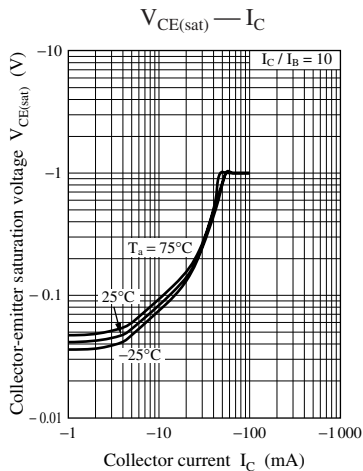
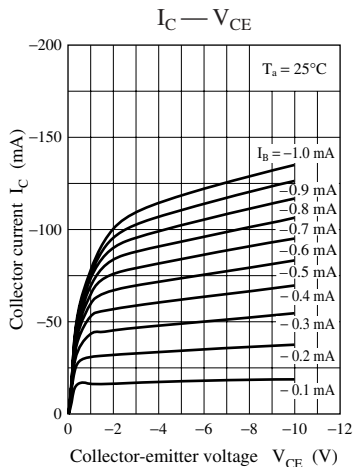


**Characteristics charts of UNR211V**

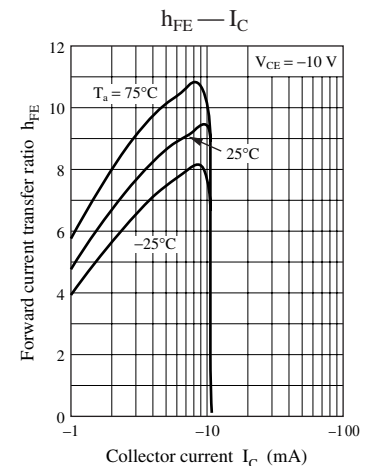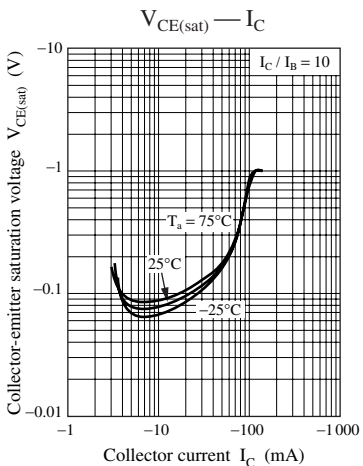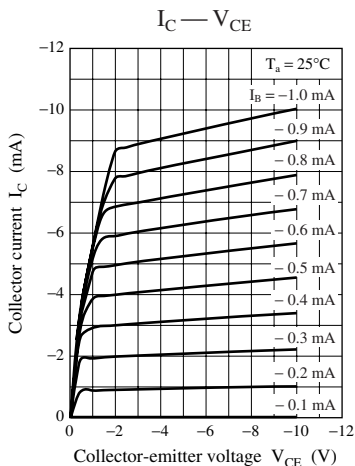

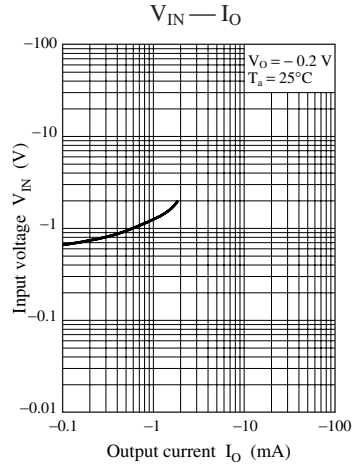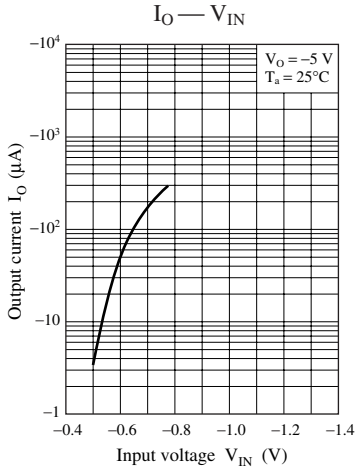

**Characteristics charts of UNR211Z**

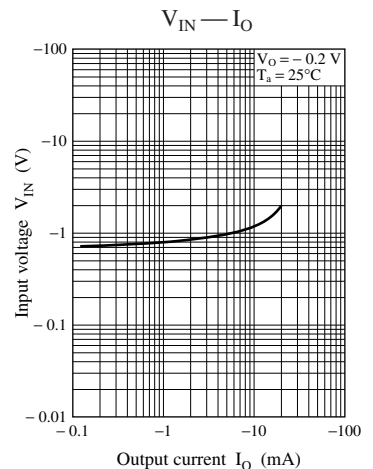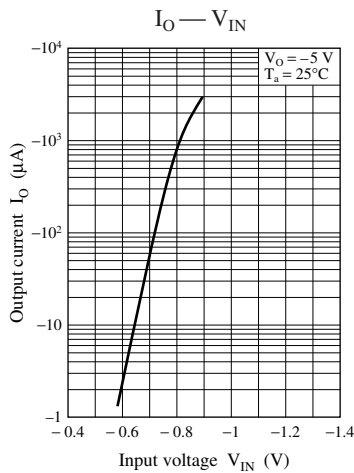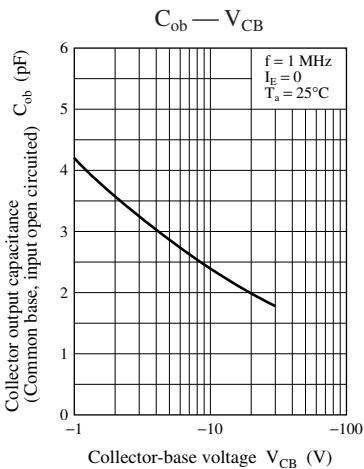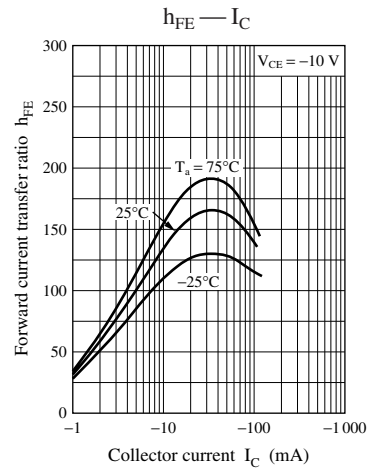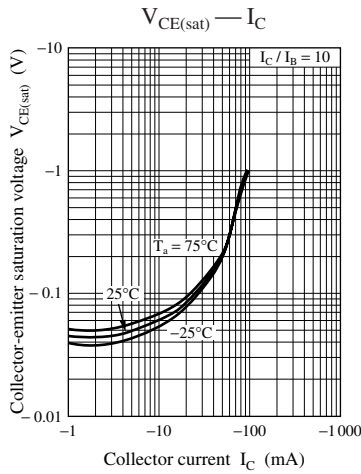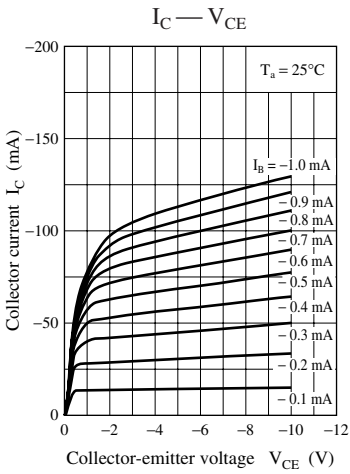



## Request for your special attention and precautions in using the technical information and semiconductors described in this material

- (1) An export permit needs to be obtained from the competent authorities of the Japanese Government if any of the products or technical information described in this material and controlled under the "Foreign Exchange and Foreign Trade Law" is to be exported or taken out of Japan.
- (2) The technical information described in this material is limited to showing representative characteristics and applied circuits examples of the products. It neither warrants non-infringement of intellectual property right or any other rights owned by our company or a third party, nor grants any license.
- (3) We are not liable for the infringement of rights owned by a third party arising out of the use of the technical information as described in this material.
- (4) The products described in this material are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).  
Consult our sales staff in advance for information on the following applications:
  - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
  - Any applications other than the standard applications intended.
- (5) The products and product specifications described in this material are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (6) When designing your equipment, comply with the guaranteed values, in particular those of maximum rating, the range of operating power supply voltage, and heat radiation characteristics. Otherwise, we will not be liable for any defect which may arise later in your equipment.  
Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (7) When using products for which damp-proof packing is required, observe the conditions (including shelf life and amount of time let standing of unsealed items) agreed upon when specification sheets are individually exchanged.
- (8) This material may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.