DWG. NO. SD-5051-N

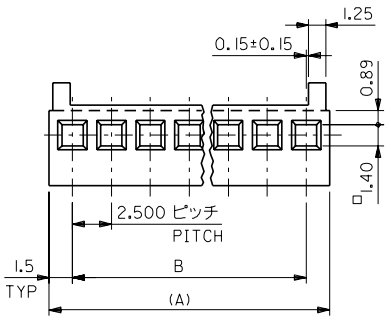

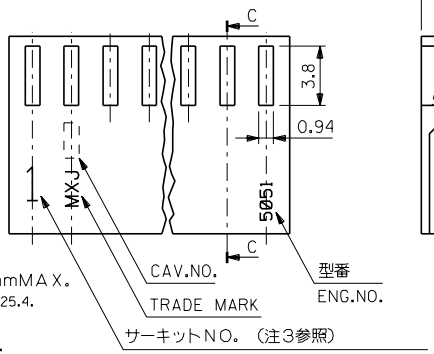

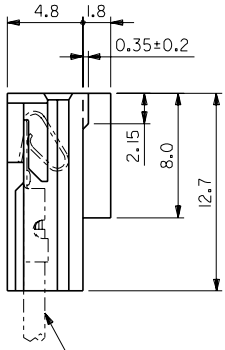

注)
NOTE.

1. そりは長さ25。4mmに対して0。2mmMAX。
   CAMBER MUST BE WITHIN 0.2 MAX. PER 25.4.
2. (　) 寸法は参考値
   DIMENSION SHOWN IN ( ) ARE REFERENCE.
3. サーキットNO。1のみ表示　但し2極の場合は
   MX－Jマーク側が1となる
   WHEN 2 CIRCUITS HOUSING TRADE MARK SIDE IN NO.1 CIRCUIT.

MT'L. NYLON 66(94V-0)

5051-20	22-01-1202	20	47.50±0.30	50.50
-19	-1192	19	45.00±0.25	48.00
-18	-1182	18	42.50±0.25	45.50
-17	-1172	17	40.00±0.25	43.00
-16	-1162	16	37.50±0.25	40.50
-15	-1152	15	35.00±0.20	38.00
-14	-1142	14	32.50±0.20	35.50
-13	-1132	13	30.00±0.20	33.00
-12	-1122	12	27.50±0.20	30.50
-11	-1112	11	25.00±0.15	28.00
-10	-1102	10	22.50±0.15	25.50
-09	-1092	9	20.00±0.15	23.00
-08	-1082	8	17.50±0.15	20.50
-07	-1072	7	15.00±0.15	18.00
-06	-1062	6	12.50±0.10	15.50
-05	-1052	5	10.00±0.10	13.00
-04	-1042	4	7.50±0.10	10.50
-03	-1032	3	5.00±0.10	8.00
5051-02	22-01-1022	2	2.50±0.08	5.50
ENG. NO.	PART NO.	極数 N	B	(A)

DO NOT SCALE DRAWING

EC NO. / DRWN: / CHK: / APPR:

REDRAWN
EC NO. JC2000-0629 '00/ 3/28
DRWN: K.KOHAMA '00/ 3/30
CHK: T.YAMAGUCHI '00/ 3/30
APPR: M.FUKUSHIMA '00/ 3/30

REV DESCRIPTION

MATERIAL 材料: 表参照 SEE TABLE
FINISH 仕上げ: //
WIRE RANGE 適用電線範囲: //
INS. RANGE 被覆外径: //

GENERAL TOLERANCES: (UNLESS SPECIFIED) 一般公差

10 UNDER 未満	±0.25 ~~±0.2~~
10 OVER 以上 30 UNDER 未満	±0.3 ~~±0.25~~
30 OVER 以上	±0.35 ~~±0.3~~
ANGLE 角度	±3°

SCALE 4:1 | DESIGN UNITS ☒mm ☐INCH | THIRD ANGLE PROJECTION
DRAWN BY & DATE '00/ 3/28 K.KOHAMA
CHECKED BY & DATE '00/ 3/30 T.YAMAGUCHI
APPROVED BY & DATE '00/ 3/30 M.FUKUSHIMA
CAD FILENAME S5051.S01
DIMENSIONS: ☐mm/INCH ☐INCH/mm ☒mm ONLY | SHT | REV | REVISE ON CAD ONLY

TITLE:
2.50/(.098) CENTERS KK.
POLZG HSG.

molex MOLEX INCORPORATED

MATERIAL NO.	DRAWING NO.	SHEET NO.
5051-**	SD-5051-N	1

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION.

SIZE B

S5051.S01

EN-02J(097) MXJ-54

Downloaded from Elcodis.com electronic components distributor