


AC-Capacitors, Suppression Capacitors Class Y2 (X1) AC 305V (MKT)

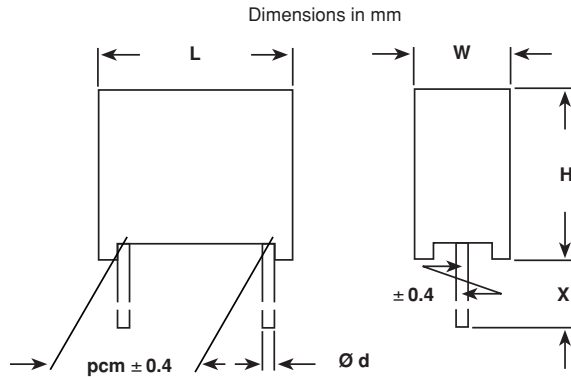

FEATURES:

Product is completely lead (Pb)-free
Product is RoHS compliant

REFERENCE STANDARDS:

EN/IEC 60068; IEC 60384-14/2 1993/07
UL 1414; CSA C22 2 No. 1-M 1994

DIELECTRIC: Polyester film

ELECTRODES: Metal evaporated

RATED VOLTAGE: AC305V; 50/60Hz

PERMISSIBLE DC VOLTAGE: DC1000V

CAPACITANCE RANGE: E12 series 1000pFY2 -0.1µFY2(X1)
preferred values acc. to E6

CAPACITANCE TOLERANCE:

Standard ± 20%; on request ± 10% and ± 5%

TERMINALS:

Radial tinned copper wire

COATING: Plastic case, epoxy resin sealed,
flame retardant; UL 94V-0

CLIMATIC TESTING CLASS ACC. TO

EN/IEC 60068-1: 40/100/56

TEST VOLTAGE:

(Electrode/electrode): DC 5000V for 1 sec. at 25°C;
Between interconnected terminations and case (foil method);
AC 2500V for 2 sec. at 25°C

DISSIPATION FACTOR TAN δ: < 1% measured at 1kHz

INSULATION RESISTANCE:

30 GΩ average value
15 GΩ average value

FURTHER TECHNICAL DATA:

See page 71 (Document Number 26525)



**RoHS
COMPLIANT**



LEAD LENGTH (X) (mm)	Code Pos.11	ORDERING CODE** (see page 49 - Document No. 26511)					
		1-4	5-7	8	9	10	11-13
4 ⁻¹	B	1710	3	.	B.0
6 ⁻¹	C	1710	3	.	C.0
15 ⁻¹	D	1710	3	.	D.0
30 ⁺⁵	L	1710	3	.	L.0

pcm (mm)	Pitch Code Pos. 10	Terminal Ød (mm)
10	D	0.6
> 10	F, I or K	0.8

MAXIMUM PULSE RISE TIME: (du/dt) in V/µs			
RATED VOLTAGE	PITCH (mm)		
	10.0/15.0	22.5	27.5
AC 305V	200	150	100

CAPACITANCE Code Pos 5-7 (as class Y2 and X1)	TOLERANCE Code Pos 8 J = ± 5% K = ± 10% M = ± 20%	PITCH Code Pos. 10 (mm)	BOX NO	DIMENSIONS W x H x L (mm) ^{+0.2 / -0.4mm}	WEIGHT (Lead Length 6 ⁻¹ mm) (g)	QUANTITY PACKAGE (Lead Length ≤ 6 ⁻¹ mm) (pcs)*	ORDERING CODE**					
							TYPE	C-Value	Tolerance	Voltage	Pitch	Lead Length Design Design
							1-4	5-7	8	9	10	11-13
1000 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	210	M	3	D	.B0
1200 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	212	M	3	D	.B0
1500 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	215	M	3	D	.B0
1800 pF	M	10.0	D	32	3.8 x 8.8 x 12.8	0.6	1710	218	M	3	D	.B0
2200 pF	M	10.0	D	02	4.3 x 9.3 x 12.8	0.8	1710	222	M	3	D	.B0
2700 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	227	M	3	D	.B0
3300 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	233	M	3	D	.B0
3900 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	239	M	3	D	.B0
4700 pF	M	10.0	D	03	5.3 x 10.3 x 12.8	1.0	1710	247	M	3	D	.B0
5600 pF	M	10.0	D	04	6.3 x 11.3 x 12.8	1.3	1710	256	M	3	D	.B0
6800 pF	M	10.0	D	04	6.3 x 11.3 x 12.8	1.3	1710	268	M	3	D	.B0
8200 pF	M	10.0	D	04	6.3 x 11.3 x 12.8	1.3	1710	282	M	3	D	.B0
0.010 µF	M	10.0	D	04	6.3 x 12.3 x 12.8	1.3	1710	310	M	3	D	.B0

* Further information about packaging quantities with different lead length and/or taped versions.

See page 16 (Document No 27608 Packaging Quantities). Use Box No. as reference

** These capacitors can be delivered on continuous tape and reel see page 14/15 (Document Number 27622)

Ordering example: 1710-210 M 2 D CB0

B0 = Bulk Pack T0 = Tray/Pallet



CAPACITANCE Code Pos 5-7 (as class Y2 and X1)	TOLERANCE Code Pos 8 J = ± 5% K = ± 10% M = ± 20%	PITCH		BOX NO	DIMENSIONS W x H x L (mm) ^{+0.2 / -0.4mm}	WEIGHT (Lead Length 6 [*] mm) (g)	QUANTITY PACKAGE (Lead Length ≤ 6 [*] mm) (pcs) [*]	ORDERING CODE**					
		(mm)	Code Pos. 10					TYPE	C-Value	Tolerance	Voltage	Pitch	Lead Length Design Code
								1-4	5-7	8	9	10	11-13
1000 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	210	M	3	F	. B0
1200 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	212	M	3	F	. B0
1500 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	215	M	3	F	. B0
1800 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	218	M	3	F	. B0
2200 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	222	M	3	F	. B0
2700 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	227	M	3	F	. B0
3300 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	233	M	3	F	. B0
3900 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	239	M	3	F	. B0
4700 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	247	M	3	F	. B0
5600 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	256	M	3	F	. B0
6800 pF	M	15	F	05	5.3 x 10.3 x 17.8	1.4	750	1710	268	M	3	F	. B0
8200 pF	M	15	F	06	6.3 x 12.3 x 17.8	2.0	500	1710	282	M	3	F	. B0
0.01 μF	M	15	F	06	6.3 x 12.3 x 17.8	2.0	500	1710	310	M	3	F	. B0
0.012 μF	M	15	F	07	7.3 x 13.3 x 17.8	2.4	450	1710	312	M	3	F	. B0
0.015 μF	M	15	F	07	7.3 x 13.3 x 17.8	2.4	450	1710	315	M	3	F	. B0
0.018 μF	M	15	F	28	8.3 x 17.3 x 17.8	3.4	300	1710	318	M	3	F	. B0
0.022 μF	M	15	F	28	8.3 x 17.3 x 17.8	3.4	300	1710	322	M	3	F	. B0
0.027 μF	M	22.5	I	09	6.3 x 14.3 x 26.3	3.5	260	1710	327	M	3	I	. . 0
0.033 μF	M	22.5	I	09	6.3 x 14.3 x 26.3	3.5	260	1710	333	M	3	I	. . 0
0.039 μF	M	22.5	I	11	7.3 x 15.3 x 26.3	3.9	235	1710	339	M	3	I	. . 0
0.047 μF	M	22.5	I	12	8.3 x 16.3 x 26.3	4.8	200	1710	347	M	3	I	. . 0
0.056 μF	M	22.5	I	13	10.3 x 18.3 x 26.3	6.6	170	1710	356	M	3	I	. . 0
0.068 μF	M	22.5	I	13	10.3 x 18.3 x 26.3	6.6	170	1710	368	M	3	I	. . 0
0.082 μF	M	27.5	K	14	11.0 x 20.3 x 31.3	9.4	125	1710	382	M	3	K	. . 0
0.1 μF	M	27.5	K	14	11.0 x 20.3 x 31.3	9.4	125	1710	410	M	3	K	. . 0

Preferred values in bold print.

* Further information about packaging quantities with different leadlength and/or taped versions.



See page 16 (Document No 27608 Packing Quantities). Use Box No as reference

**These capacitors can be delivered on continuous tape and reel see page 14/15 (Document Number 27622)

The ordering code is then: F1710 - . . . M 3 . 0R0 at H = 16.5mm, F1710 - . . . M 3 . 0W0 at H = 18.5mm.

APPROVALS

COUNTRY	SPECIFICATION	ELECTRICAL VALUES	APPROVAL REFERENCE	APPROVAL MARK
U.S.A (for AC 250V)	UL 1283 UL 1414	1000pFY - 0.1μFY 1000pFY - 0.1μFY	E 76297 E 100682	
Canada (for AC 250V)	C 22.2 No. 1-M 1994	1000pFY - 0.1μFY	LR 64546-7	
CB TEST-CERTIFICATE (for AC 305V)		1000pF - 0.1μFY2 (X1)	DE 1-10088	
Germany (for AC 305V)	EN 132 400, 1999-06 IEC 60384-14, 2nd edition, 1995-06	1000pF - 0.1μFY2 (X1)	136954L	

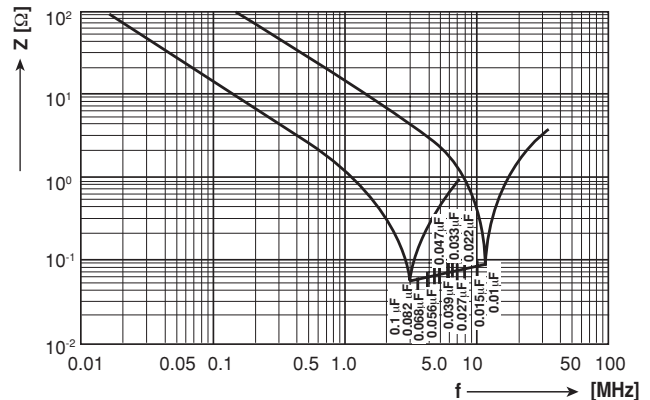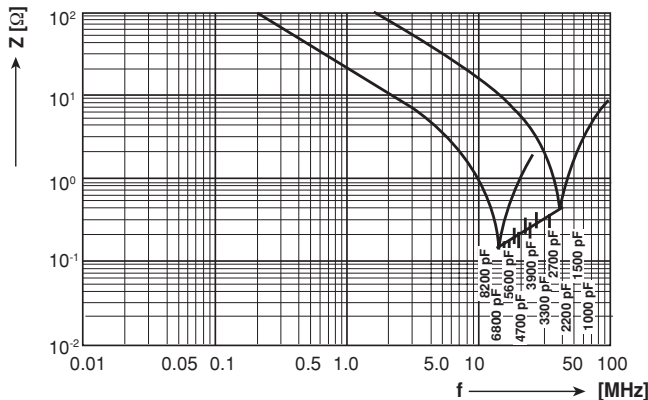

Impedance (Z) as a function of frequency (f) at T_a = 20°C (average). Measurement with lead length 6mm.



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.