

Clip, 5 x 20 mm, Version 1

onlinecomponents.com  
THE ONLINE DISTRIBUTOR OF ELECTRONIC COMPONENTS

250 VAC

**Description**

- Through hole mounting

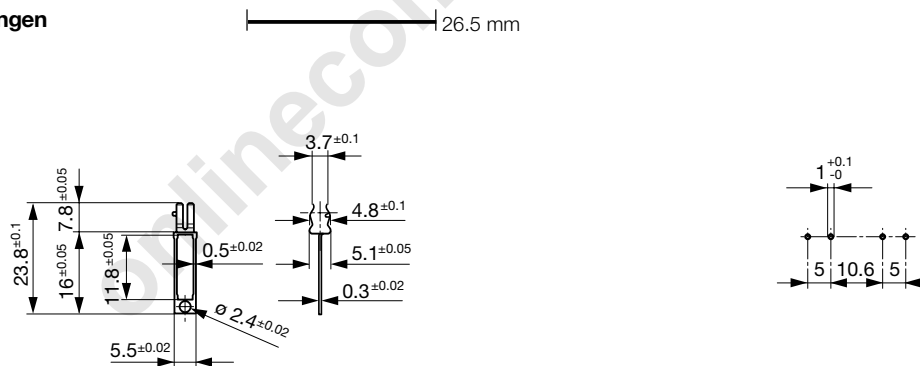
**Weblinks**

pdf, html, General Product Information, Approvals, RoHS, CHINA-RoHS, e-Shop, SCHURTER-Stock-Check, Distributor-Stock-Check

**Technical Data**

Fuse-Link	5 x 20 mm
Mounting	PCB
Terminal	Solder THT
Rated Voltage	250 VAC
Rated Current	6.3 A
Degree of Protection	IP 00
Admissible Ambient Air Temp.	-40 °C to 90 °C
Climatic Category	40/090/21 acc. to IEC 60068-1
Material: Terminals	see variants
Unit Weight (Socket/Cap)	0.32 g
Storage Conditions	0 °C to 60 °C, max. 70% r.h.
Product Marking	none

Soldering Methods	Wave
Solderability	235 °C / 2 sec acc. to IEC 60068-2-20, Test Ta, method 1
Resistance to Soldering Heat	260 °C / 10 sec acc. to IEC 60068-2-20, Test Tb, method 1A
Contact Resistance	< 10 mΩ at 20 mV

**Abmessungen**

Drilling diagram

**Variants**

Clip	Terminal	Material: Terminals	Order Number
•	Straight	Silver-Plated Bronze	0752.1242
•	Straight	Nickel-Plated Brass	0752.1243

**Packaging Unit** Taped reeled (1000 pcs.)