



FEATURES:

- RoHS compliant
- Wide 2:1 input range
- High efficiency up to 82%
- Continuous short circuit protection
- Operating temperature -40°C to + 85°C
- Input / Output Isolation 1500 and 3500 VDC
- Pin compatible with multiple manufacturers
- Low profile metal package



Models
Single output

| Model | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Isolation (VDC) | Capacitive load, max (µF) | Efficiency (%) |
|----------------|-------------------|--------------------|-------------------------|-----------------|---------------------------|----------------|
| AM3T-1203SZ | 9-18 | 3.3 | 800 | 1500 | 470 | 73 |
| AM3T-1205SZ | 9-18 | 5 | 600 | 1500 | 470 | 76 |
| AM3T-1207SZ | 9-18 | 7.2 | 417 | 1500 | 68 | 78 |
| AM3T-1209SZ | 9-18 | 9 | 333 | 1500 | 68 | 77 |
| AM3T-1212SZ | 9-18 | 12 | 250 | 1500 | 47 | 79 |
| AM3T-1215SZ | 9-18 | 15 | 200 | 1500 | 47 | 79 |
| AM3T-1218SZ | 9-18 | 18 | 167 | 1500 | 22 | 80 |
| AM3T-1224SZ | 9-18 | 24 | 125 | 1500 | 22 | 79 |
| AM3T-2403SZ | 18-36 | 3.3 | 800 | 1500 | 470 | 73 |
| AM3T-2405SZ | 18-36 | 5 | 600 | 1500 | 470 | 77 |
| AM3T-2407SZ | 18-36 | 7.2 | 417 | 1500 | 68 | 79 |
| AM3T-2409SZ | 18-36 | 9 | 333 | 1500 | 68 | 78 |
| AM3T-2412SZ | 18-36 | 12 | 250 | 1500 | 47 | 78 |
| AM3T-2415SZ | 18-36 | 15 | 200 | 1500 | 47 | 78 |
| AM3T-2418SZ | 18-36 | 18 | 167 | 1500 | 22 | 79 |
| AM3T-2424SZ | 18-36 | 24 | 125 | 1500 | 22 | 78 |
| AM3T-4803SZ | 36-72 | 3.3 | 800 | 1500 | 470 | 75 |
| AM3T-4805SZ | 36-72 | 5 | 600 | 1500 | 470 | 80 |
| AM3T-4807SZ | 36-72 | 7.2 | 417 | 1500 | 68 | 80 |
| AM3T-4809SZ | 36-72 | 9 | 333 | 1500 | 68 | 80 |
| AM3T-4812SZ | 36-72 | 12 | 250 | 1500 | 47 | 82 |
| AM3T-4815SZ | 36-72 | 15 | 200 | 1500 | 47 | 82 |
| AM3T-4818SZ | 36-72 | 18 | 167 | 1500 | 22 | 80 |
| AM3T-4824SZ | 36-72 | 24 | 125 | 1500 | 22 | 80 |
| AM3T-1203SH35Z | 9-18 | 3.3 | 800 | 3500 | 470 | 73 |
| AM3T-1205SH35Z | 9-18 | 5 | 600 | 3500 | 470 | 76 |
| AM3T-1207SH35Z | 9-18 | 7.2 | 417 | 3500 | 68 | 78 |
| AM3T-1209SH35Z | 9-18 | 9 | 333 | 3500 | 68 | 77 |
| AM3T-1212SH35Z | 9-18 | 12 | 250 | 3500 | 47 | 79 |
| AM3T-1215SH35Z | 9-18 | 15 | 200 | 3500 | 47 | 79 |
| AM3T-1218SH35Z | 9-18 | 18 | 167 | 3500 | 22 | 80 |
| AM3T-1224SH35Z | 9-18 | 24 | 125 | 3500 | 22 | 79 |
| AM3T-2403SH35Z | 18-36 | 3.3 | 800 | 3500 | 470 | 75 |
| AM3T-2405SH35Z | 18-36 | 5 | 600 | 3500 | 470 | 80 |
| AM3T-2407SH35Z | 18-36 | 7.2 | 417 | 3500 | 68 | 80 |
| AM3T-2409SH35Z | 18-36 | 9 | 333 | 3500 | 68 | 80 |
| AM3T-2412SH35Z | 18-36 | 12 | 250 | 3500 | 47 | 82 |
| AM3T-2415SH35Z | 18-36 | 15 | 200 | 3500 | 47 | 82 |
| AM3T-2418SH35Z | 18-36 | 18 | 167 | 3500 | 22 | 80 |
| AM3T-2424SH35Z | 18-36 | 24 | 125 | 3500 | 22 | 80 |
| AM3T-4803SH35Z | 36-72 | 3.3 | 800 | 3500 | 470 | 80 |
| AM3T-4805SH35Z | 36-72 | 5 | 600 | 3500 | 470 | 77 |
| AM3T-4807SH35Z | 36-72 | 7.2 | 417 | 3500 | 68 | 81 |
| AM3T-4809SH35Z | 36-72 | 9 | 333 | 3500 | 68 | 78 |
| AM3T-4812SH35Z | 36-72 | 12 | 250 | 3500 | 47 | 80 |
| AM3T-4815SH35Z | 36-72 | 15 | 200 | 3500 | 47 | 80 |

Models

Single output (continue)

| Model | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Isolation (VDC) | Capacitive load, max (μF) | Efficiency (%) |
|----------------|-------------------|--------------------|-------------------------|-----------------|---------------------------|----------------|
| AM3T-4818SH35Z | 36-72 | 18 | 167 | 3500 | 22 | 80 |
| AM3T-4824SH35Z | 36-72 | 24 | 125 | 3500 | 22 | 80 |

Models

Dual output

| Model | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Isolation (VDC) | Capacitive load, max (μF) | Efficiency (%) |
|----------------|-------------------|--------------------|-------------------------|-----------------|---------------------------|----------------|
| AM3T-1203DZ | 9-18 | ±3.3 | ±400 | 1500 | ±220 | 75 |
| AM3T-1205DZ | 9-18 | ±5 | ±300 | 1500 | ±220 | 78 |
| AM3T-1207DZ | 9-18 | ±7.2 | ±208 | 1500 | ±33 | 78 |
| AM3T-1209DZ | 9-18 | ±9 | ±167 | 1500 | ±33 | 79 |
| AM3T-1212DZ | 9-18 | ±12 | ±125 | 1500 | ±22 | 80 |
| AM3T-1215DZ | 9-18 | ±15 | ±100 | 1500 | ±22 | 80 |
| AM3T-1218DZ | 9-18 | ±18 | ±84 | 1500 | ±10 | 78 |
| AM3T-1224DZ | 9-18 | ±24 | ±63 | 1500 | ±10 | 80 |
| AM3T-2403DZ | 18-36 | ±3.3 | ±400 | 1500 | ±220 | 75 |
| AM3T-2405DZ | 18-36 | ±5 | ±300 | 1500 | ±220 | 77 |
| AM3T-2407DZ | 18-36 | ±7.2 | ±208 | 1500 | ±33 | 81 |
| AM3T-2409DZ | 18-36 | ±9 | ±167 | 1500 | ±33 | 78 |
| AM3T-2412DZ | 18-36 | ±12 | ±125 | 1500 | ±22 | 80 |
| AM3T-2415DZ | 18-36 | ±15 | ±100 | 1500 | ±22 | 80 |
| AM3T-2418DZ | 18-36 | ±18 | ±84 | 1500 | ±10 | 80 |
| AM3T-2424DZ | 18-36 | ±24 | ±63 | 1500 | ±10 | 80 |
| AM3T-4803DZ | 36-72 | ±3.3 | ±400 | 1500 | ±220 | 76 |
| AM3T-4805DZ | 36-72 | ±5 | ±300 | 1500 | ±220 | 78 |
| AM3T-4807DZ | 36-72 | ±7.2 | ±208 | 1500 | ±33 | 78 |
| AM3T-4809DZ | 36-72 | ±9 | ±167 | 1500 | ±33 | 79 |
| AM3T-4812DZ | 36-72 | ±12 | ±125 | 1500 | ±22 | 80 |
| AM3T-4815DZ | 36-72 | ±15 | ±100 | 1500 | ±22 | 80 |
| AM3T-4818DZ | 36-72 | ±18 | ±84 | 1500 | ±10 | 78 |
| AM3T-4824DZ | 36-72 | ±24 | ±63 | 1500 | ±10 | 80 |
| AM3T-1203DH35Z | 9-18 | ±3.3 | ±400 | 3500 | ±220 | 75 |
| AM3T-1205DH35Z | 9-18 | ±5 | ±300 | 3500 | ±220 | 78 |
| AM3T-1207DH35Z | 9-18 | ±7.2 | ±208 | 3500 | ±33 | 80 |
| AM3T-1209DH35Z | 9-18 | ±9 | ±167 | 3500 | ±33 | 79 |
| AM3T-1212DH35Z | 9-18 | ±12 | ±125 | 3500 | ±22 | 80 |
| AM3T-1215DH35Z | 9-18 | ±15 | ±100 | 3500 | ±22 | 80 |
| AM3T-1218DH35Z | 9-18 | ±18 | ±84 | 3500 | ±10 | 80 |
| AM3T-1224DH35Z | 9-18 | ±24 | ±63 | 3500 | ±10 | 80 |
| AM3T-2403DH35Z | 18-36 | ±3.3 | ±400 | 3500 | ±220 | 75 |
| AM3T-2405DH35Z | 18-36 | ±5 | ±300 | 3500 | ±220 | 78 |
| AM3T-2407DH35Z | 18-36 | ±7.2 | ±208 | 3500 | ±33 | 80 |
| AM3T-2409DH35Z | 18-36 | ±9 | ±167 | 3500 | ±33 | 79 |
| AM3T-2412DH35Z | 18-36 | ±12 | ±125 | 3500 | ±22 | 80 |
| AM3T-2415DH35Z | 18-36 | ±15 | ±100 | 3500 | ±22 | 80 |
| AM3T-2418DH35Z | 18-36 | ±18 | ±84 | 3500 | ±10 | 80 |
| AM3T-2424DH35Z | 18-36 | ±24 | ±63 | 3500 | ±10 | 80 |
| AM3T-4803DH35Z | 36-72 | ±3.3 | ±400 | 3500 | ±220 | 76 |
| AM3T-4805DH35Z | 36-72 | ±5 | ±300 | 3500 | ±220 | 78 |
| AM3T-4807DH35Z | 36-72 | ±7.2 | ±208 | 3500 | ±33 | 78 |
| AM3T-4809DH35Z | 36-72 | ±9 | ±167 | 3500 | ±33 | 79 |
| AM3T-4812DH35Z | 36-72 | ±12 | ±125 | 3500 | ±22 | 80 |

Models

Dual output (continue)

| Model | Input Voltage (V) | Output Voltage (V) | Output Current max (mA) | Isolation (VDC) | Capacitive load, max (μF) | Efficiency (%) |
|----------------|-------------------|--------------------|-------------------------|-----------------|---------------------------|----------------|
| AM3T-4815DH35Z | 36-72 | ±15 | ±100 | 3500 | ±22 | 80 |
| AM3T-4818DH35Z | 36-72 | ±18 | ±84 | 3500 | ±10 | 78 |
| AM3T-4824DH35Z | 36-72 | ±24 | ±63 | 3500 | ±10 | 80 |

NOTE: All specifications in this datasheet are measured at an ambient temperature of 25°C, humidity<75%, nominal input voltage and at rated output load unless otherwise specified

Input Specifications

| Parameters | Nominal | Typical | Maximum | Units |
|--------------------------------|----------------|---------|---------|-------|
| Voltage range | 12 | 9-18 | | VDC |
| | 24 | 18-36 | | |
| | 48 | 36-72 | | |
| Filter | π (Pi) Network | | | |
| Turn on Transient process time | | | 350 | ms |
| Start up time | | 500 | | ms |
| Absolute Maximum Rating | 12 Vin | -0.7-24 | | VDC |
| | 24 Vin | -0.7-40 | | |
| | 48 Vin | -0.7-80 | | |
| Peak Input Voltage time | | 100 | | ms |

Isolation Specifications

| Parameters | Conditions | Typical | Rated | Units |
|--------------------|------------|---------|---------------|-------|
| Tested I/O voltage | 3 sec | | 1500 and 3500 | VDC |
| Resistance | | > 1000 | | MOhm |
| Capacitance | | 470 | | pF |

Output Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|--|--------------------|---------|---------|--------|
| Voltage accuracy | | ±1 | | % |
| Voltage balance Dual output | | ±1 | | % |
| Short Circuit protection | Continuous | | | |
| Short circuit restart | Auto-recovery | | | |
| Line voltage regulation (Single) | LL-HL | ±0.5 | | % |
| Line voltage regulation (Dual) | LL-HL | ±0.5 | | % |
| Load voltage regulation (Single) | Load: 10...100% | ±0.5 | | % |
| Load voltage regulation (Single) 3.3V output model | Load: 10...100% | ±1.5 | | % |
| Load voltage regulation (Dual) | Load: 10...100% | ±0.5 | | % |
| Load voltage regulation (Dual) ±3.3V output model | Load: 10...100% | ±1.5 | | % |
| Temperature coefficient | | ±0.02 | | %/°C |
| Ripple & Noise | At 20MHz Bandwidth | 60 | | mV p-p |
| Rising time | | 10 | | ms |


General Specifications

| Parameters | Conditions | Typical | Maximum | Units |
|-----------------------|---|---------------------------|-------------------------|-------|
| Switching frequency | 100% load | 266 | | KHz |
| Operating temperature | Full Load without Derating | | -40 to +85 | °C |
| Storage temperature | | | -40 to +125 | °C |
| Max Case temperature | | | 100 | °C |
| Cooling | Free air convection | | | |
| Humidity | | | 90 | % |
| Case material | Nickel-coated copper | | | |
| Weight | | 17 | | g |
| Dimensions(L x W x H) | Tolerance ±0.5 mm or ±0.02 inches | 1.28 x 0.84 x 0.41 inches | 32.25 x 21.35 x 10.50mm | |
| MTBF | >1 039 000 hrs (MIL-HDBK -217F, Ground Benign, t=+25°C) | | | |

Pin Out Specifications

| Pin | 1500VDC | | 3500VDC | |
|-------|-----------|-----------|-----------|-----------|
| | Single | Dual | Single | Dual |
| 1 | +V Input | +V Input | No pin | No pin |
| 2 | N.C. | -V Output | -V Input | -V Input |
| 3 | N.C. | Common | -V Input | -V Input |
| 9 | No pin | No pin | No pin | Common |
| 10 | -V Output | Common | No pin | No pin |
| 11 | +V Output | +V Output | N.C. | -V Output |
| 12/13 | -V Input | -V Input | No pin | No pin |
| 14 | +V Output | +V Output | +V Output | +V Output |
| 15 | -V Output | Common | No pin | No pin |
| 16 | No pin | No pin | -V Output | Common |
| 22 | N.C. | Common | +V Input | +V Input |
| 23 | N.C. | -V Output | +V Input | +V Input |
| 24 | +V Input | +V Input | No pin | No pin |

Dimensions

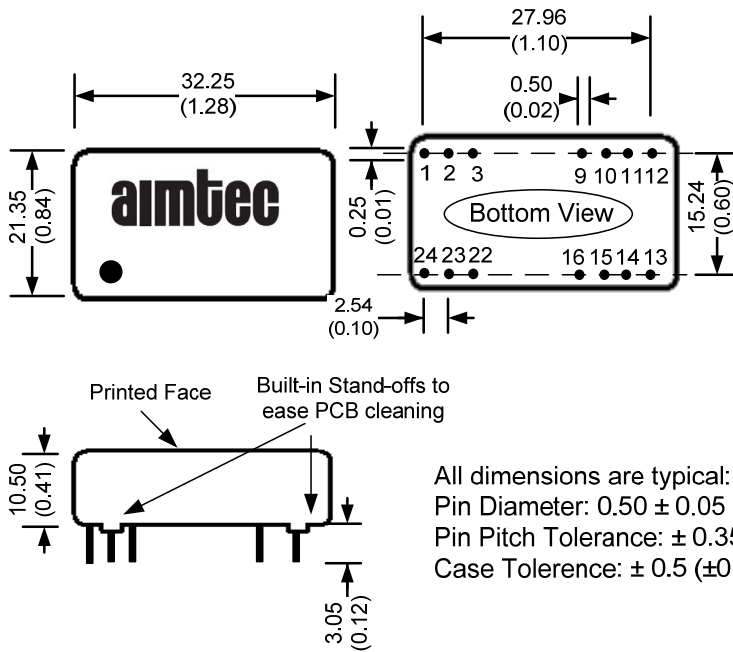

All dimensions are typical: millimeters (inches)
 Pin Diameter: 0.50 ± 0.05 (0.02 ± 0.002)
 Pin Pitch Tolerance: ± 0.35 (± 0.014)
 Case Tolerance: ± 0.5 (± 0.02)

NOTE: 1. Datasheets are updated as needed and as such, specifications are subject to change without notice. Once printed or downloaded, datasheets are no longer controlled by Aimtec; refer to www.aimtec.com for the most current product specifications. 2. Product labels shown, including safety agency certifications on labels, may vary based on the date manufactured. 3. Mechanical drawings and specifications are for reference only. 4. All specifications are measured at an ambient temperature of 25°C, humidity < 75%, nominal input voltage and at rated output load unless otherwise specified. 5. Aimtec may not have conducted destructive testing or chemical analysis on all internal components and chemicals at the time of publishing this document. CAS numbers and other limited information are considered proprietary and may not be available for release. 6. This product is not designed for use in critical life support systems, equipment used in hazardous environments, nuclear control systems or other such applications which necessitate specific safety and regulatory standards other than the ones listed in this datasheet. 7. Warranty is in accordance with Aimtec's standard Terms of Sale available at www.aimtec.com.