


Capacitor, tantalum, 22 uF, 7343, +/-10% Tol, 20V@85C

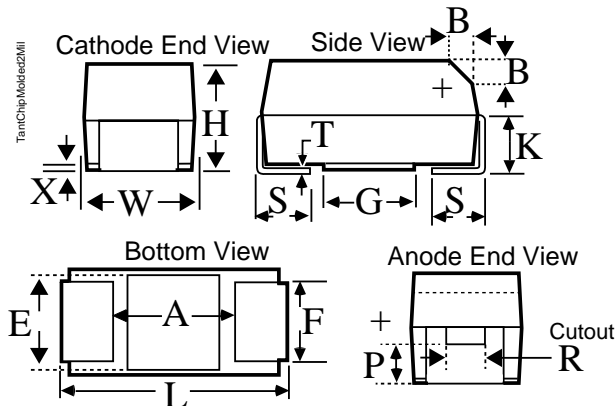

Cutout at KEMET's option (either end); see note about P and R dimensions and cutout.

Dimensions (mm)

Specifications

ID	Dimension	Tolerance
L	7.3	+/-0.3
W	4.3	+/-0.3
H	2.8	+/-0.3
K	1.5	+/-0.2
F	2.4	+/-0.1
S	1.3	+/-0.3
B	0.5	+/-0.15
X	0.1	ref
P	0.9	ref
R	1	ref
T	0.13	ref
A	3.8	ref
G	3.5	ref
E	3.5	ref

Manufacturer:	KEMET
Capacitance:	22 uF
Voltage DC @ 85C:	20V
Voltage DC @ 105C:	16.5V
Voltage DC @ 125C:	13V
Tolerance:	+/-10%
Application:	Low ESR
Body Type:	Molded Chip
Temperature Range:	-55/+125C
ESR:	200 mOhm
Footprint:	7343
Termination:	Tin
Leakage Current:	4.4 uA
Dissipation Factor:	6%
Ripple @ 25C:	0.87 A
Ripple @ 85C:	0.783 A
Ripple @ 125C:	0.348 A
Package Kind:	T&R
Package Quantity:	750

Notes:
 -D