




# Shielded Power Inductors – MSS1048

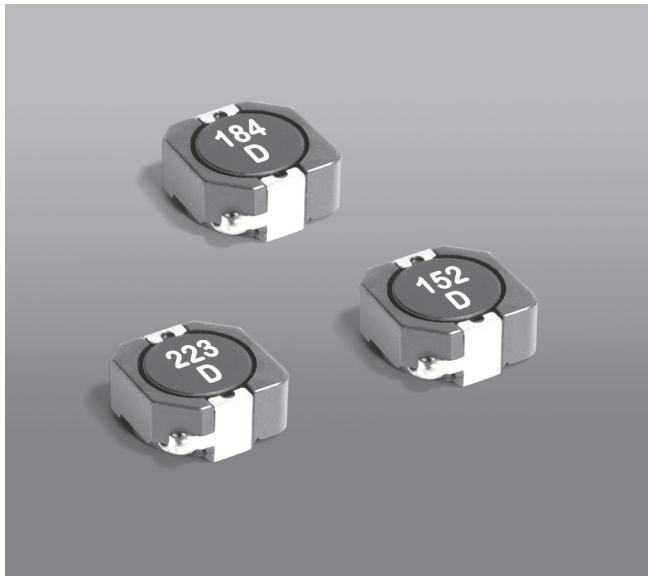

- 10 × 10.2 mm footprint; 4.8 mm high shielded inductors
- Very low DCR and excellent current handling

**Designer's Kit C409** contains 3 each of all values.

**Core material** Ferrite

**Terminations** RoHS compliant matte tin over nickel over copper. Other terminations available at additional cost.

**Weight:** 1.7 – 1.9 g

**Ambient temperature** –40°C to +85°C with Irms current, +85°C to +125°C with derated current

**Storage temperature** Component: –40°C to +85°C.  
Tape and reel packaging: –40°C to +80°C

**Resistance to soldering heat** Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

**Moisture Sensitivity Level (MSL)** 1 (unlimited floor life at <30°C / 85% relative humidity)

**Failures in Time (FIT) / Mean Time Between Failures (MTBF)**

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

**Packaging** 200/7" reel; 800/13" reel; Plastic tape: 24 mm wide, 0.35 mm thick, 16 mm pocket spacing, 5.1 mm pocket depth

**PCB washing** Only pure water or alcohol recommended

Part number <sup>1</sup>	Inductance <sup>2</sup> ( $\mu$ H)	DCR max (m $\Omega$ )	SRF typ <sup>3</sup> (MHz)	Isat (A) <sup>4</sup>			Irms (A) <sup>5</sup>	
				10% drop	20% drop	30% drop	20°C rise	40°C rise
MSS1048-801NL_	0.8±30%	4.1	180	9.60	12.0	14.1	8.19	12.0
MSS1048-152NL_	1.5±30%	5.1	90	5.44	7.80	10.5	7.41	10.8
MSS1048-222NL_	2.2±30%	7.2	70	4.92	6.62	8.40	6.63	9.78
MSS1048-332NL_	3.3±30%	10.1	50	4.62	6.32	7.38	5.04	7.22
MSS1048-472NL_	4.7±30%	11.4	38	4.36	5.62	6.46	4.90	6.90
MSS1048-682NL_	6.8±30%	15.4	35	3.60	5.00	5.94	4.52	6.01
MSS1048-822NL_	8.2±30%	17.7	28	3.14	4.14	4.84	4.38	5.71
MSS1048-103ML_	10±20%	22.7	24	3.08	3.84	4.32	3.99	4.79
MSS1048-153ML_	15±20%	36.4	20	2.46	3.06	3.44	3.51	4.26
MSS1048-223ML_	22±20%	52.2	12	2.36	2.90	3.28	2.86	3.58
MSS1048-333ML_	33±20%	66.0	11	1.66	2.14	2.42	2.12	2.80
MSS1048-473ML_	47±20%	109.9	10	1.44	1.86	2.20	1.83	2.42
MSS1048-563ML_	56±20%	117.2	10	1.36	1.70	1.90	1.71	2.28
MSS1048-683ML_	68±20%	173.1	7.0	1.28	1.60	1.70	1.39	1.88
MSS1048-823ML_	82±20%	192.8	6.0	1.08	1.44	1.64	1.23	1.67
MSS1048-104ML_	100±20%	216.8	6.0	0.99	1.20	1.36	1.09	1.48
MSS1048-154KL_	150±10%	324.4	5.0	0.79	1.02	1.16	0.97	1.33
MSS1048-184KL_	180±10%	356.5	4.5	0.75	0.92	1.02	0.89	1.24
MSS1048-224KL_	220±10%	405.9	4.5	0.67	0.84	0.95	0.85	1.18
MSS1048-334KL_	330±10%	749.5	3.0	0.57	0.69	0.76	0.57	0.82
MSS1048-474KL_	470±10%	901.4	2.7	0.43	0.52	0.62	0.50	0.72

1. Please specify **termination** and **packaging** codes:

**MSS1048-334KLC**

**Termination:** L = RoHS compliant matte tin over nickel over copper.

**Special order:**

T = RoHS tin-silver-copper (95.5/4/0.5) or S = non-RoHS tin-lead (63/37).

**Packaging:** C = 7" machine-ready reel. EIA-481 embossed plastic tape (200 parts per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape. Factory order only, not stocked (800 parts per full reel).

2. Inductance measured at 100 kHz, 0.1 Vrms, 0 Adc using an Agilent/HP 4263B LCR meter or equivalent.

3. SRF measured using an Agilent/HP 4192A impedance analyzer or equivalent.

4. DC current at which the inductance drops the specified amount from its value without current.

5. Current that causes the specified temperature rise from 25°C ambient.

6. Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.



www.coilcraft.com

US +1-847-639-6400 sales@coilcraft.com  
UK +44-1236-730595 sales@coilcraft-europe.com  
Taiwan +886-2-2264 3646 sales@coilcraft.com.tw  
China +86-21-6218 8074 sales@coilcraft.com.cn  
Singapore +65-6484 8412 sales@coilcraft.com.sg

Document 462-1 Revised 10/03/11


© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.




# SMT Power Inductors – MSS1048



## Typical L vs Current

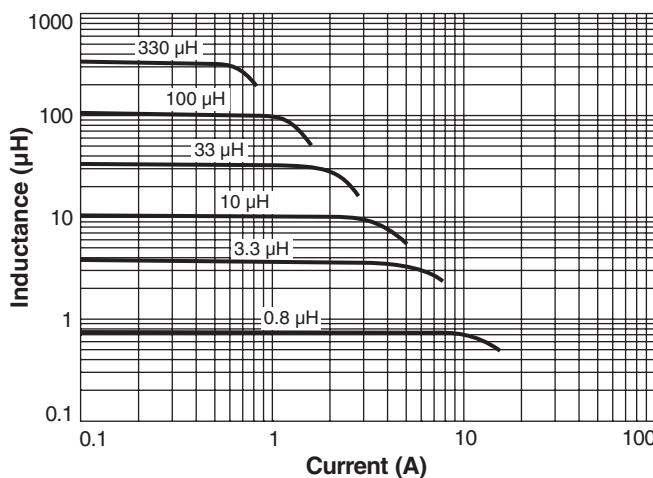

## Typical L vs Frequency

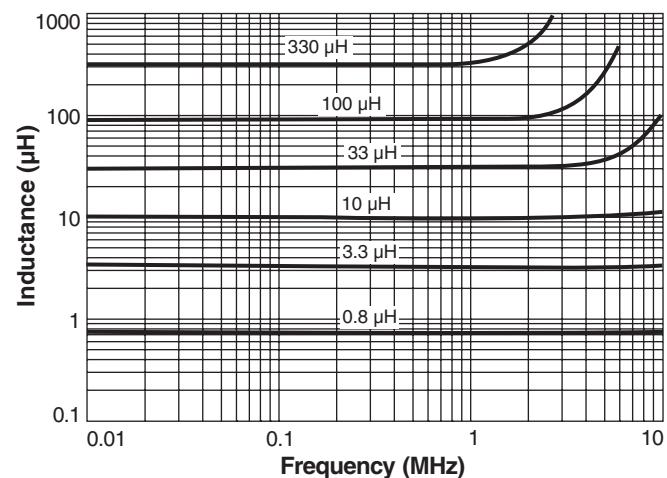

## Typical Current Derating

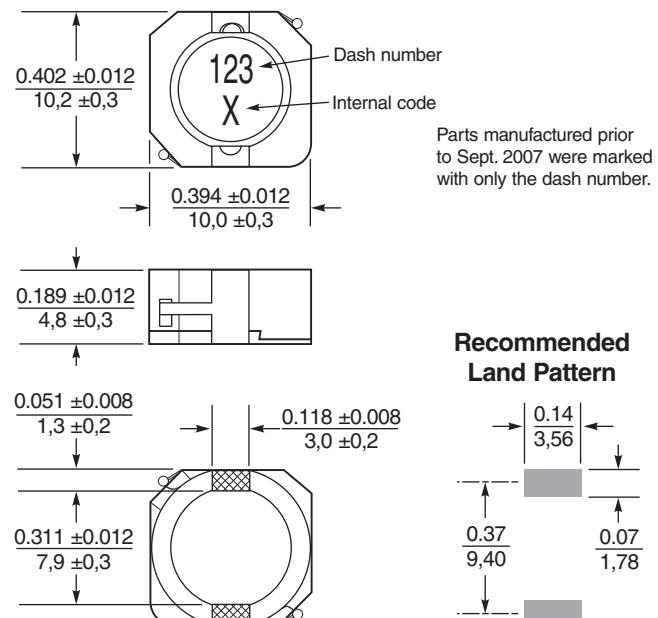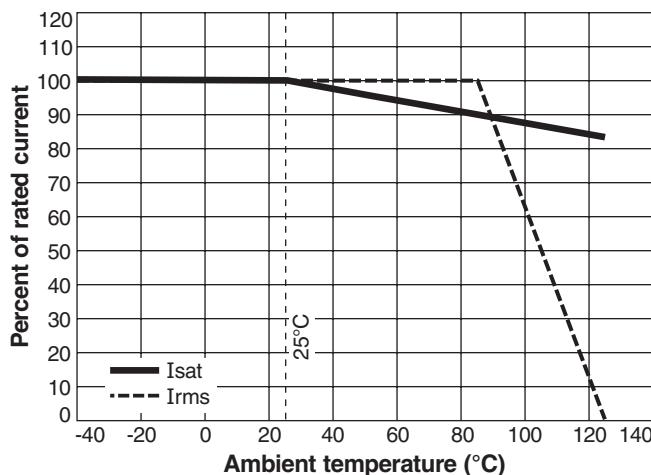

Dimensions are in  $\frac{\text{inches}}{\text{mm}}$



[www.coilcraft.com](http://www.coilcraft.com)

**US** +1-847-639-6400 [sales@coilcraft.com](mailto:sales@coilcraft.com)  
**UK** +44-1236-730595 [sales@coilcraft-europe.com](mailto:sales@coilcraft-europe.com)  
**Taiwan** +886-2-2264 3646 [sales@coilcraft.com.tw](mailto:sales@coilcraft.com.tw)  
**China** +86-21-6218 8074 [sales@coilcraft.com.cn](mailto:sales@coilcraft.com.cn)  
**Singapore** +65-6484 8412 [sales@coilcraft.com.sg](mailto:sales@coilcraft.com.sg)

Document 462-2 Revised 10/03/11

© Coilcraft Inc. 2011

This product may not be used in medical or high risk applications without prior Coilcraft approval. Specifications subject to change without notice. Please check our web site for latest information.