



3,6
TYP. REF.

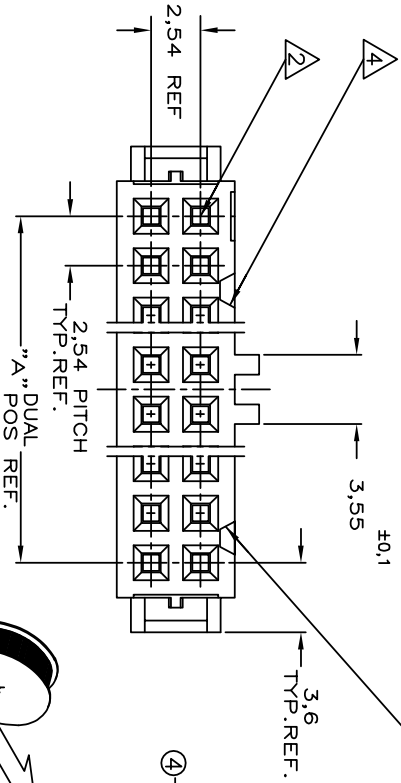


DO NOT SCALE
DIMENSIONS IN mm

METRIC



NOTES:

- 1 CONNECTOR IS DESIGNED FOR FLAT RIBBON CABLE ON 1.27 CENTERS .
FOR CABLE REQUIREMENTS SEE AMP APPLICATION SPECIFICATION 114-19022.
- 2 THESE RECEPTACLE CONNECTORS MATE WITH 0.64^{+0.05}mm SQUARE OR ROUND POSTS ON 2.54mm GRID.
- 3 MARK INDICATING FIRST CABLE POSITION REFERRING TO CONTACT POSITION.
- 4 THERE IS NO POLARIZATION-SLOT AT THIS END IN 4, 6, 8, 10 AND 14 POS CONNECTORS.
- 5 THESE CONNECTORS CAN BE USED IN CONJUNCTION WITH STRAIN-RELIEF COVERS OF PARTNR: 100103.
- 6 THERE IS NO POLARIZATION-SLOT AT THIS END IN 4, 6, AND 8 POS CONNECTORS.
PRODUCT SPECIFICATION 108-19033.

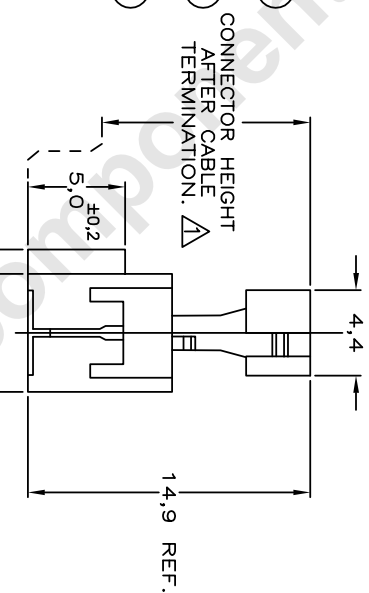

QUANTITY PER REEL	DIM. "C"	"B" CABLE POS.	"A" POS.	PARTNUMBER	PART REV.
1000	85,9	64	32	6-215919-4	D
1000	80,8	60	30	6-215919-0	D
1000	68,1	50	25	5-215919-0	D
1500	60,5	44	22	4-215919-4	D
1500	55,4	40	20	4-215919-0	D
1500	47,8	34	17	3-215919-4	D
1500	37,6	26	13	2-215919-6	D
1500	30,0	20	10	2-215919-0	D
1500	24,9	16	8	1-215919-6	D
1500	17,3	14	7	1-215919-4	D
1500	12,3	10	5	1-215919-0	D
OBsolete	14,5	8	4	0-215919-6	C
OBsolete	12,2	6	3	0-215919-6	D
OBsolete	9,7	4	2	0-215919-4	C

COMPONENT NAME	MATERIAL	PLATING / COLOUR
1 RECEPTACLE CONTACT	PHOSPHORBRONZE Cu Sn6	AT CONTACT-PLACE: 0.2µm GOLD ENTIRE UNDERCOATING: 1.27µm NICKEL
2 COVER	THERMOPLASTIC POLYESTER GF UL 94 -V0	GREY RAL 7032 ONLY FOR REF.
3 HOUSING		

DATE:	CHK.:	APP.:	DATE:	DWG.No.	SIZE	SHEET	REV./LTR.
02-02-88	R.HOERGEN	L.V.SOST	03-02-88	C-215919	A3	1 of 1	D6

DATE:	CHK.:	APP.:	DATE:	DWG.No.	SIZE	SHEET	REV./LTR.
02-02-88	R.HOERGEN	L.V.SOST	03-02-88	C-215919	A3	1 of 1	D6

DATE:	CHK.:	APP.:	DATE:	DWG.No.	SIZE	SHEET	REV./LTR.
02-02-88	R.HOERGEN	L.V.SOST	03-02-88	C-215919	A3	1 of 1	D6