


**Reed Relay V23100 -V4**

- Direct coil control with TTL-signals possible
- Highly reliable switching
- High switching rates
- Ultrasonic cleanable
- High vibration and shock resistance

Typical applications  
Incircuit tester, measuring and control systems, telecom equipment, alarm and security equipment

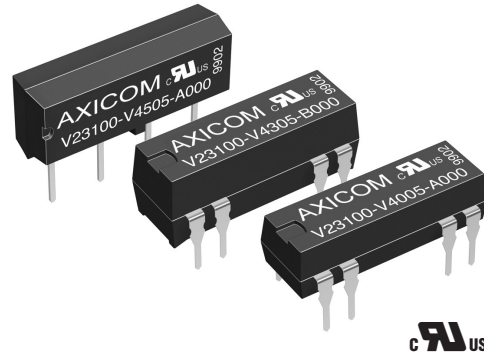

**Approvals**

UL File No. 111441  
Technical data of approved types on request

Contact Data	form A	form C
Contact arrangement	1 form A (1 NO), 2 form A (2 NO)	1 form C (CO)
Max. switching voltage		
at rated coil voltage 5VDC	200VDC/VAC <sub>peak</sub>	175VDC
at rated coil voltage 12to 24VDC	200VDC/VAC <sub>peak</sub>	175VDC <sub>peak</sub>
Limiting continuous current	1A	1.2A
Switching power	10W, 10VA	3W, 3VA
Contact material	Ruthenium	
Contact style	reed contact	
Initial contact resistance	<150mΩ	
Operate / release time max.	0.75/0.15ms	1.1/1.6ms
Electrical endurance		
at 12V/10mA	50x10 <sup>6</sup> operations	
at 24V/400mA	5x10 <sup>9</sup> operations	

**Coil Data**

Magnetic system	neutral
Coil voltage range	5 to 24VDC
Max. coil temperature	105°C
Thermal resistance	< 75K/W

**Coil versions, monostable**

Coil code	Rated voltage VDC	Operate voltage VDC	Release voltage VDC	Coil resistance Ω±10%	Rated coil power mW
<b>1 form A (1 NO) contact</b>					
05	5VDC	3.5	0.75	500	50
12	12VDC	8.4	1.80	1000	144
15	15VDC	10.5	2.25	2000	112
24	24VDC	16.8	3.60	2000	288
<b>2 form A (2 NO) or 1 form C (1 CO) contact</b>					
05	5VDC	3.5	0.75	200	125
12	12VDC	8.4	1.80	500	288
15	15VDC	10.5	2.25	2000	112
24	24VDC	16.8	3.60	2000	288


All figures are given for coil without pre-energization, at ambient temperature +23°C.

**Coil Data (continued)**

**Coil versions, limiting operate voltage**

Coil code	DIP flat, SIL, 1 form A	DIP flat 1 form A with diode	DIP high 1 form C	DIP high 2 form A std, diode	DIP high 1 form C diode+ shield	Mini SIL 1 form A
	VDC	VDC	VDC	VDC	VDC	VDC
05	22.0	14.0	13.0	14.0	14.5	13.6
12	33.0	25.0	22.0	25.0	23.5	21.6
15	44.0	47.0	44.0	47.0	14.5	-
24	44.0	47.0	44.0	47.0	49.0	-

All figures are given for coil without pre-energization, at ambient temperature +23°C

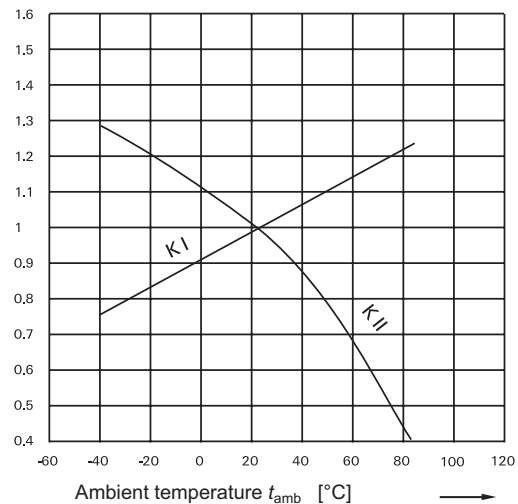

**Coil operative range**

**Coil operative range graphs**

- U<sub>I</sub> Minimum voltage at 23°C after pre-energizing with rated voltage without contact current
- U<sub>II</sub> Maximum continuous voltage at 23°C  
The operating voltage limits U<sub>I</sub> and U<sub>II</sub> depend on the temperature according to the formula:  
U<sub>I t<sub>amb</sub></sub> K<sub>I</sub> × U<sub>I</sub> 23°C and  
U<sub>II t<sub>amb</sub></sub> K<sub>II</sub> × U<sub>II</sub> 23°C  
t<sub>amb</sub> Ambient temperature  
U<sub>I t<sub>amb</sub></sub> Minimum voltage at ambient temperature, t<sub>amb</sub>  
U<sub>II t<sub>amb</sub></sub> Maximum voltage at ambient temperature, t<sub>amb</sub>  
K<sub>I</sub>, K<sub>II</sub> Factors (dependent on temperature), see diagram

**Reed Relay V23100 -V4** (Continued)

**Insulation Data**

Initial dielectric strength	
between open contacts	
DIP and SIL, 1 form A (NO), 2 form A (2 NO)	250VDC
DIP, 1 form C (CO)	200VDC
Mini SIL, 1 form A (NO)	225VDC
between contact and coil	1500VDC
Initial insulation resistance at 500 VDC	>10 <sup>9</sup> Ω
Capacitance	
between open contacts	max. 1pF
between contact and coil	max. 2pF
between adjacent contacts	max. 1pF

**Other Data**


	form A	form C
Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at <a href="http://www.te.com/customersupport/rohssupportcenter">www.te.com/customersupport/rohssupportcenter</a>		
Ambient temperature	-40 to +85°C	
Category of environmental protection	IEC 61810	
Degree of protection, IEC 60529	RT-III - immersion cleanable	
Vibration resistance (functional)	30g, 10 to 2000Hz	30g, 50 to 2000Hz
Shock resistance (functional), IEC 60068-2-27 (half sine),DIP and SIL	150g	50g
	Mini SIL	50g
Terminal type	PCB-THT	
Resistance to soldering heat	THT	
	IEC 60068-2-20	
	265 °C / 10 s	

**Terminal assignment**


TOP view on component side of PCB

**DIP, flat version**


1 form A (NO)  
standard  
V23100-V4xxx-A000




1 form A (NO)  
with diode  
V23100-V4xxx-A010




1 form A (NO)  
with electrostatic shield + diode  
V23100-V4xxx-A011



1 form A (NO)  
with electrostatic shield  
V23100-V4xxx-A001




1 form C (CO)  
standard  
V23100-V4xxx-C000




**DIP, high version**


1 form C (CO)  
with diode  
V23100-V4xxx-C010




1 form C (CO)  
with electrostatic shield + diode  
V23100-V4xxx-C011



2 form A (NO)  
standard  
V23100-V43xx-B000




2 form A (NO)  
with diode  
V23100-V43xx-B010




**SIL version**

1 form A (NO)  
standard  
V23100-V45xx-A000




1 form A (NO)  
with diode  
V23100-V45xx-A010




**Mini SIL version**

1 form A (NO)  
standard  
V23100-V46xx-A000



1 form A (NO)  
with diode  
V23100-V46xx-A010




**Reed Relay V23100 -V4** (Continued)


**PCB layout**

TOP view on component side of PCB


**DIP, flat version**




**DIP, high version**



**SIL version**




**Mini SIL version**




**Dimensions**


**DIP, flat version**

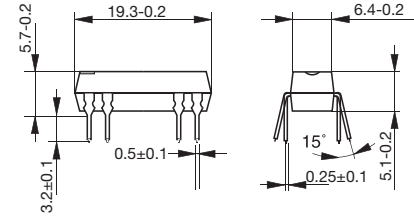


**SIL version**

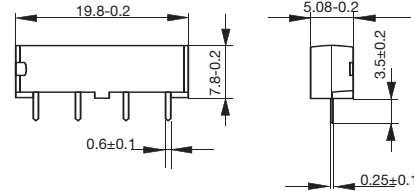

**DIP, high version**

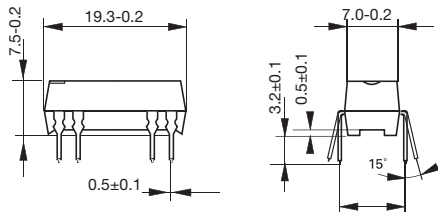

**Mini SIL version**

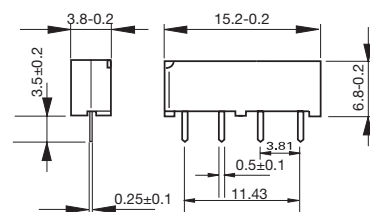

**Product code structure**

Typical product code **V23100-V4 0 05 A0 10**

**Type**

**V23100-V4** Reed Relay, V23100-V4 Series

**Version**

- 0** DIP flat, 1 form A (NO) contact or 1 form C (CO) contact without diode
- 3** DIP high, 2 form A (NO) or 1 form C (CO) contacts
- 5** SIL, 1 form A (NO) contact
- 6** Mini SIL, 1 form A (NO) contact

**Coil**

Coil code: please refer to coil versions table

- 05** 5VDC coil
- 12** 12VDC coil
- 15** 15VDC coil
- 24** 24VDC coil

**Contact arrangement**

- A0** 1 form A (NO) contact, DIP flat or SIL package
- B0** 2 form A (NO) contacts, DIP high package
- C0** 1 form C (CO) contact, DIP high package

**Coil circuit**

- 00** Standard
- 10** With diode
- 11** With diode and electrostatic shield

**Reed Relay V23100 -V4** (Continued)

Product Code	Version	Coil	Arrangement	Diode/shield	Part number					
V23100-V4005-A000	DIP flat	5VDC	1 form A (NO)	Standard	1393763-1					
V23100-V4012-A000		12VDC			1393763-6					
V23100-V4015-A000		15VDC			1-1393763-0					
V23100-V4024-A000		24VDC			1-1393763-4					
V23100-V4005-A010		5VDC			1 form C (CO)	Diode	1393763-4			
V23100-V4012-A010		12VDC					1393763-8			
V23100-V4015-A010		15VDC					1-1393763-2			
V23100-V4024-A010		24VDC					1-1393763-6			
V23100-V4305-C000		5VDC					1 form A (NO)	Standard	2-1393763-0	
V23100-V4312-C000		12VDC							2-1393763-8	
V23100-V4315-C000	15VDC	3-1393763-4								
V23100-V4324-C000	24VDC	4-1393763-0								
V23100-V4005-A011	5VDC	2 form A (NO)	Diode and shield	1393763-3						
V23100-V4012-A011	12VDC			1393763-9						
V23100-V4015-A011	15VDC			1-1393763-3						
V23100-V4024-A011	24VDC			1-1393763-7						
V23100-V4305-B000	5VDC			Standard	Standard	1-1393763-8				
V23100-V4312-B000	12VDC					2-1393763-6				
V23100-V4315-B000	15VDC					3-1393763-2				
V23100-V4324-B000	24VDC					3-1393763-8				
V23100-V4305-B010	5VDC					1 form C (CO)	Diode	1-1393763-9		
V23100-V4312-B010	12VDC							2-1393763-7		
V23100-V4315-B010	15VDC	3-1393763-3								
V23100-V4324-B010	24VDC	3-1393763-9								
V23100-V4305-C010	5VDC	1 form C (CO)	Standard					2-1393763-2		
V23100-V4312-C010	12VDC							3-1393763-0		
V23100-V4315-C010	15VDC			3-1393763-6						
V23100-V4324-C010	24VDC			4-1393763-2						
V23100-V4305-C011	5VDC			2 form A (NO)	Diode and shield			2-1393763-3		
V23100-V4312-C011	12VDC							3-1393763-1		
V23100-V4315-C011	15VDC					3-1393763-7				
V23100-V4324-C011	24VDC					4-1393763-3				
V23100-V4505-A000	SIL					5VDC	1 form A (NO)	Standard	4-1393763-4	
V23100-V4512-A000						12VDC			4-1393763-7	
V23100-V4515-A000		15VDC	4-1393763-9							
V23100-V4524-A000		24VDC	5-1393763-1							
V23100-V4505-A010		5VDC	1 form C (CO)			Diode			4-1393763-5	
V23100-V4512-A010		12VDC							4-1393763-8	
V23100-V4515-A010		15VDC		5-1393763-0						
V23100-V4524-A010		24VDC		5-1393763-2						
V23100-V4605-A000		Mini SIL		5VDC	1 form A (NO)				Standard	1422026-2
V23100-V4612-A000				12VDC						1422026-3
V23100-V4605-A010	5VDC			1 form C (CO)			Diode	1422026-5		
V23100-V4612-A010	12VDC							1422026-6		