



**CHENMKO ENTERPRISE CO.,LTD**

*Lead free devices*

**SURFACE MOUNT  
SWITCHING DIODE**

**VOLTAGE 20 Volts CURRENT 0.1 Ampere**

**CH221PT**

**APPLICATION**

- \* Bias circuit.
- \* Protection circuits.

**FEATURE**

- \* Small surface mounting type. (SC-75/SOT-416)
- \* Two diode elements are connected in series (VFX2) per circuit.
- \* Maximum total power dissipation is 150mW.
- \* Peak forward current is 200mA.


**CONSTRUCTION**

- \* Silicon epitaxial planar


**MARKING**

- \* A7

**CIRCUIT**



**SC-75/SOT-416**

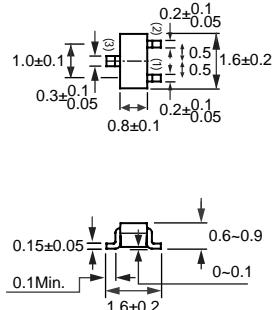

Dimensions in millimeters

**SC-75/SOT-416**

**MAXIMUM RATINGS ( At TA = 25°C unless otherwise noted )**

RATINGS	SYMBOL	CH221PT	UNITS
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	20	Volts
Maximum RMS Voltage	V <sub>RMS</sub>	14	Volts
Maximum DC Blocking Voltage	V <sub>DC</sub>	20	Volts
Maximum Average Forward Rectified Current	I <sub>O</sub>	0.1	Amps
Peak Forward Surge Current at 1uSec.	I <sub>FSM</sub>	0.3	Amps
Typical Junction Capacitance between Terminal (Note 1)	C <sub>J</sub>	2.0	pF
Maximum Operating Temperature Range	T <sub>J</sub>	+150	°C
Storage Temperature Range	T <sub>STG</sub>	-55 to +150	°C

**ELECTRICAL CHARACTERISTICS ( At TA = 25°C unless otherwise noted )**

CHARACTERISTICS	SYMBOL	CH221PT	UNITS
Maximum Instantaneous Forward Voltage at I <sub>F</sub> = 10mA	V <sub>F</sub>	1.00	Volts
Maximum Average Reverse Current at V <sub>R</sub> = 15V	I <sub>R</sub>	0.1	uAmps

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 6.0 volts.  
2. ESD sensitive product handling required.

2002-5

## RATING CHARACTERISTIC CURVES ( CH221PT )

FIG. 1 - FORWARD CHARACTERISTICS

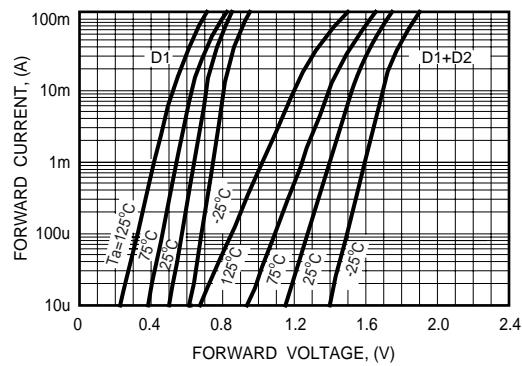


FIG. 2 - FORWARD CHARACTERISTICS

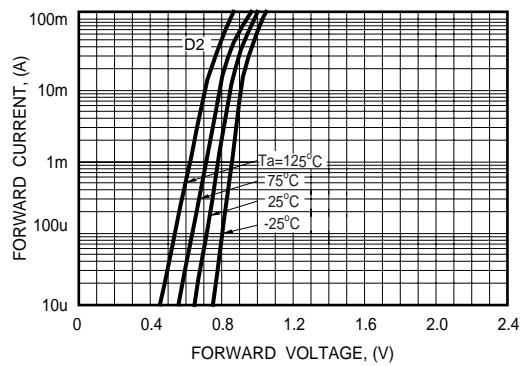


FIG. 3 - REVERSE CHARACTERISTICS

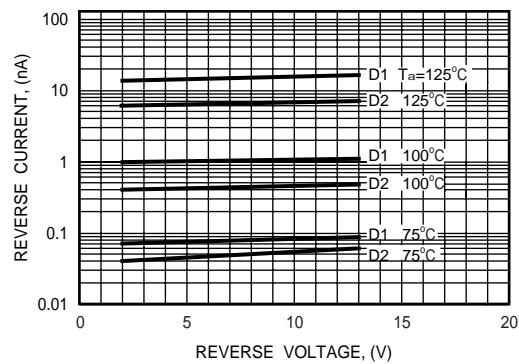


FIG. 4 - TYPICAL JUNCTION CAPACITANCE

