




SMT Power Inductors – SLC7649 Series

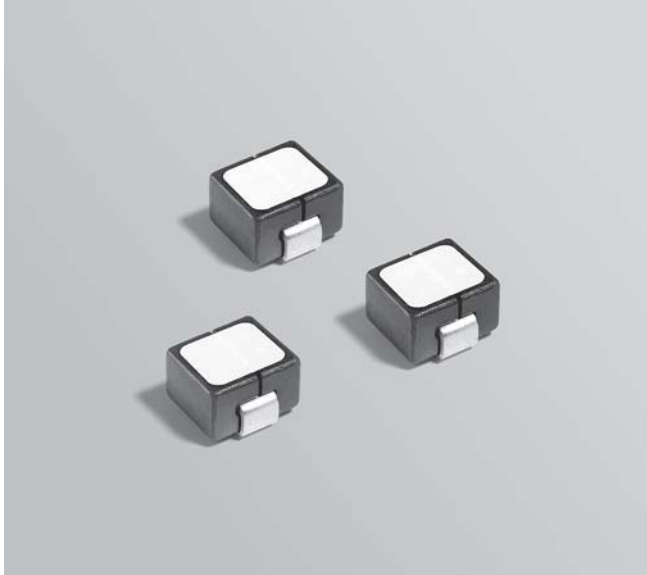

- Designed for use in multi-phase VRM/VRD regulators and high current/high frequency DC/DC converters.
- Requires only 60 mm² of board space; can handle up to 100 A

Core material Ferrite

Core and winding loss See www.coilcraft.com/coreloss

Terminations RoHS compliant matte tin over nickel over copper. Other terminations available at additional cost.

Weight 0.9 g

Ambient temperature –40°C to +85°C with I_{rms} current, +85°C to +125°C with derated current

Storage temperature Component: –40°C to +125°C. Packaging: –40°C to +80°C

Resistance to soldering heat Max three 40 second reflows at +260°C, parts cooled to room temperature between cycles

Moisture Sensitivity Level (MSL) 1 (unlimited floor life at <30°C / 85% relative humidity)

Failures in Time (FIT) / Mean Time Between Failures (MTBF)

38 per billion hours / 26,315,789 hours, calculated per Telcordia SR-332

Packaging 250/7" reel; 1000/13" reel Plastic tape: 16 mm wide, 0.35 mm thick, 12 mm pocket spacing, 5 mm pocket depth

PCB washing Only pure water or alcohol recommended

Part number ¹	L ±10% ² (nH)	DCR ±5% ³ (mOhms)	SRF typ ⁴ (MHz)	Isat ⁵ (A)	I _{rms} ⁶ (A)
SLC7649S-360KL_	36	0.17	1150	100	39
SLC7649S-500KL_	50	0.17	900	84	39
SLC7649S-700KL_	70	0.17	750	65	39
SLC7649S-101KL_	100	0.17	110	42	39
SLC7649S-121KL_	120	0.17	78	33	39
SLC7649S-151KL_	150	0.17	67	27	39

1. When ordering, please specify **termination** and **packaging** code:

SLC7649S-101KL C

Termination: L = RoHS compliant matte tin over nickel over copper
Special order: T = RoHS tin-silver-copper (95.5/4/0.5)
or S = non-RoHS tin-lead (63/37).



Packaging: C = 7" machine-ready reel. EIA-481 embossed plastic tape (250 per full reel).

B = Less than full reel. In tape, but not machine ready. To have a leader and trailer added (\$25 charge), use code letter C instead.

D = 13" machine-ready reel. EIA-481 embossed plastic tape (1000 per full reel). Factory order only, not stocked.


- Inductance tested at 100 kHz, 0.1 V_{rms} using an Agilent/HP 4263B LCR meter or equivalent.
- DCR is measured between the two points indicated on the dimensional drawing.
- SRF measured using an Agilent/HP 8753ES network analyzer or equivalent.
- DC current at which the inductance drops 20% (typ) from its value without current.
- Current that causes a 40°C temperature rise from 25°C ambient.
- Electrical specifications at 25°C.

Refer to Doc 362 "Soldering Surface Mount Components" before soldering.

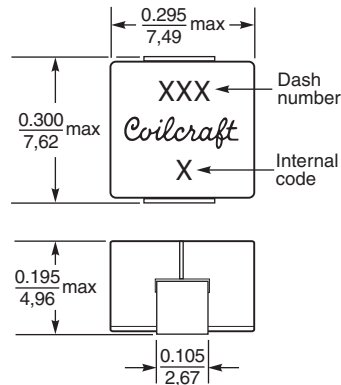

▲ Points used for measuring DCR

Recommended Land Pattern



Dimensions are in inches/mm

Coilcraft[®]

Specifications subject to change without notice.
Please check our website for latest information.

Document 481-1 Revised 09/10/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469



E-mail info@coilcraft.com Web <http://www.coilcraft.com>

SPICE models
ON OUR WEB SITE OR CD





SMT Power Inductors – SLC7649 Series


L vs Frequency

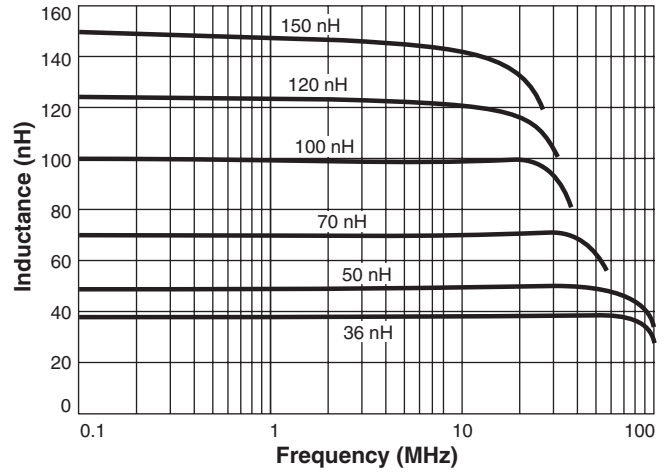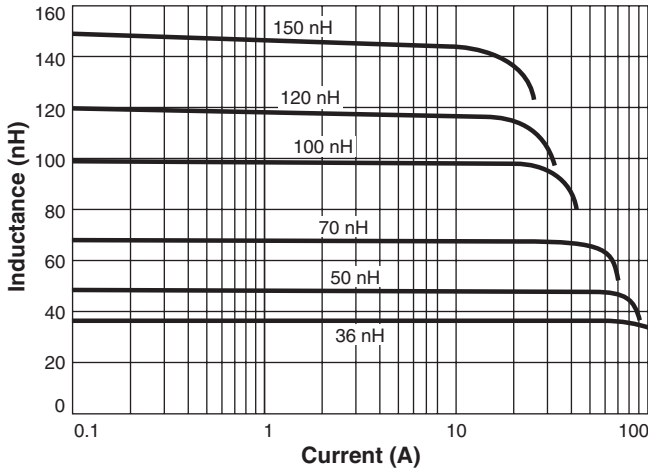

ESR vs Frequency

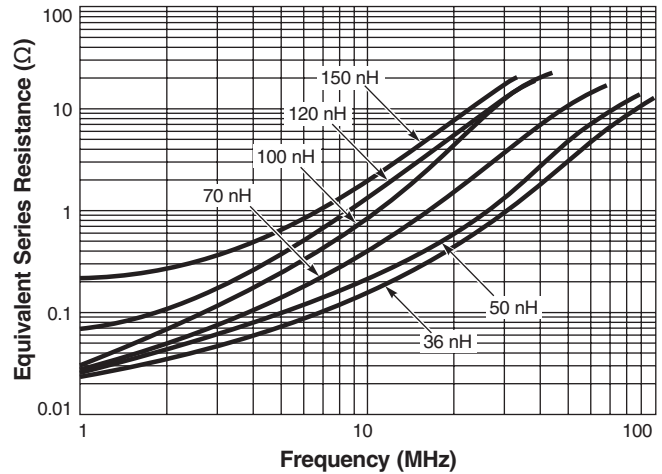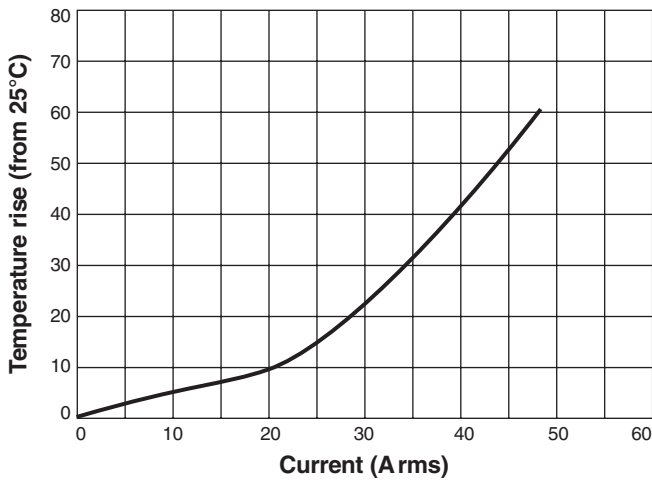

Irms Derating

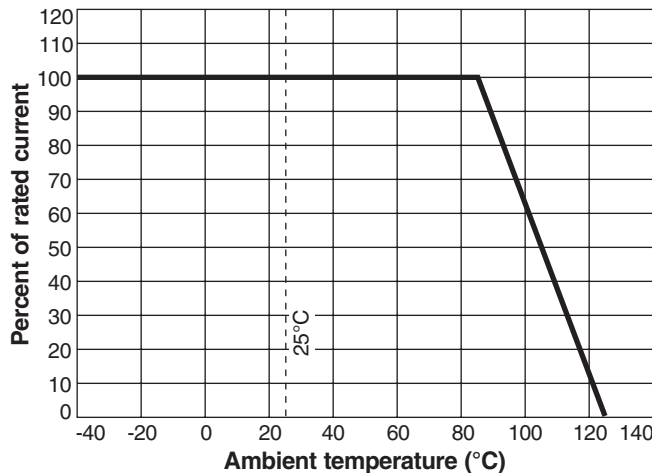

Specifications subject to change without notice.
Please check our website for latest information.

Document 481-2 Revised 09/10/09

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>