



ASSEMBLY ITEM NUMBER	PART CHARACTERISTICS	
	NUMBER OF POSITION	PANEL MOUNT OPTION
43020-0208	2	YES
43020-0209	2	NO
43020-0408	4	YES
43020-0409	4	NO
43020-0808	8	YES
43020-0809	8	NO
43020-0808	8	YES
43020-0809	8	NO
43020-1008	10	YES
43020-1009	10	NO
43020-1208	12	YES
43020-1209	12	NO
	14	YES
	14	NO
	16	YES
	16	NO
	18	YES
	18	NO
	20	YES
	20	NO
	22	YES
	22	NO
	24	YES
	24	NO





CKT. NO.	DIM. 'A'	DIM. 'B'	DIM. 'C'	DIM. 'D'
2	.152/(3.86)	N/A	.156/(4.20)	.311/(7.90)
4	.270/(6.85)	.118/(3.00)	.284/(7.20)	.429/(10.90)
6	.388/(9.85)	.236/(6.00)	.402/(10.20)	.547/(13.89)
8	.506/(12.85)	.354/(9.00)	.520/(13.20)	.665/(16.89)
10	.624/(15.85)	.472/(12.00)	.638/(16.20)	.783/(19.89)
12	.742/(18.85)	.591/(15.00)	.756/(19.20)	.901/(22.89)
14	.860/(21.85)	.709/(18.00)	.874/(22.20)	1.019/(25.88)
16	.978/(24.85)	.827/(21.00)	.992/(25.20)	1.137/(28.88)
18	1.096/(27.85)	.945/(24.00)	1.110/(28.20)	1.255/(31.88)
20	1.215/(30.85)	1.063/(27.00)	1.229/(31.22)	1.373/(34.87)
22	1.333/(33.85)	1.181/(30.00)	1.347/(34.22)	1.491/(37.87)
24	1.451/(36.85)	1.299/(33.00)	1.465/(37.22)	1.609/(40.87)





- NOTES:
- HOUSING MATERIAL: UNFILLED NYLON 6, UL 94V-0, IEC 60335-1, 4TH EDITION GLOW WIRE CAPABLE, COLOR - BLACK
  - FINISH: N/A
  - PRODUCT SPECIFICATION: PS-43045
  - PACKAGING SPECIFICATION: N/A
  - THIS HOUSING MATES WITH MICRO-FIT RECEPTACLE #43025-\*\*\*\*
  - THIS HOUSING TO BE USED WITH MOLEX MALE TERMINAL #43031-\*\*\*\*
  - DESIGNED FOR .055/(1.4) MINIMUM TO A .100/(2.54) MAXIMUM THICK PANEL OR PRINTED CIRCUIT BOARD.
  - SEE SECTION 'D'-'D' FOR TERMINAL ORIENTATION IN HOUSING.
  - PANEL MOUNT FEATURES MUST LOCK ON SIDE OPPOSITE PUNCH SIDE FOR OPTIMUM RETENTION.
  - THIS PART CONFORMS TO CLASS 'B' REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002, EXCEPT 2 AND 4. CIRCUIT PARTS CONFORM TO CLASS 'C' SURFACE REQUIREMENTS.




PLUG WITH OPTIONAL PANEL MOUNTS  
ISO VIEW  
(8 CIRCUIT SHOWN)

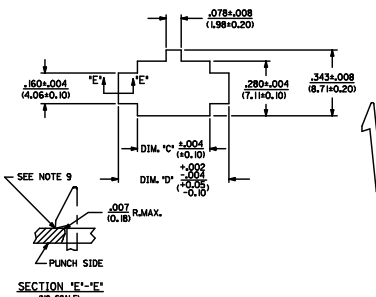

RECOMMENDED PANEL CUT-OUT

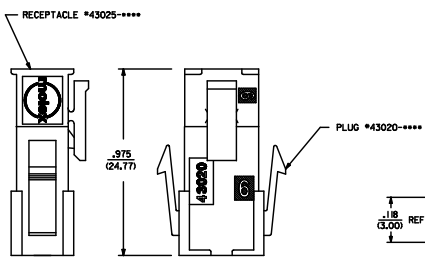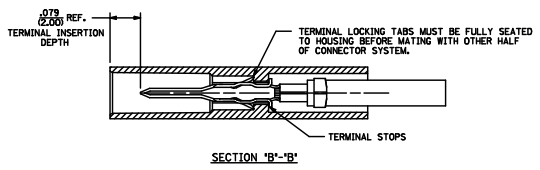

MATED MICRO-FIT CONNECTOR

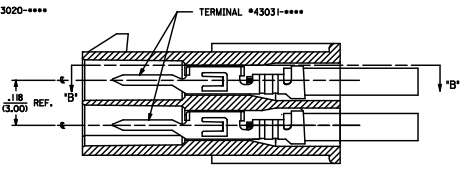

SECTION 'D'-'D' WITH TERMINAL SCALE

ADD 2 CUT PART # END - LECTRO-085 APPROVED BY APPROVAL DATE APPROVAL SIGNATURE	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE	SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION	
	$\nabla=0$ $\nabla=0$	4 PLACES ± .010 3 PLACES ± .010 2 PLACES ± 0.25 1 PLACE ± 0.35 ANGULAR ±1/2°	IN/MH DATE DATE DATE DATE	IN/MH DATE DATE DATE DATE	--- METRIC	METRIC METRIC	THIRD ANGLE PROJECTION
	DRAWN BY CHECKED BY APPROVED BY DATE	DATE DATE DATE DATE	DATE DATE DATE DATE	DATE DATE DATE DATE	DATE DATE DATE DATE	DATE DATE DATE DATE	DATE DATE DATE DATE
	DRAFT WHERE APPLICABLE WITHIN DIMENSIONS	MATERIAL NO. SEE CHART THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	DOCUMENT NO. SD-43020-001	SHEET NO. 1 OF 1			