


HIGH EFFICIENCY FAST RECOVERY RECTIFIER DIODES

FEATURES

- SUITED FOR SMPS
- VERY LOW FORWARD LOSSES
- NEGLIGIBLE SWITCHING LOSSES
- HIGH SURGE CURRENT CAPABILITY
- HIGH AVALANCHE ENERGY CAPABILITY
- INSULATED :
 Insulating voltage = 2500 V_{RMS}
 Capacitance = 55 pF

DESCRIPTION

Dual rectifier suited for switchmode power supply and high frequency DC to DC converters. Packaged in ISOTOP™ this device is intended for use in low voltage, high frequency inverters, free wheeling and polarity protection applications.

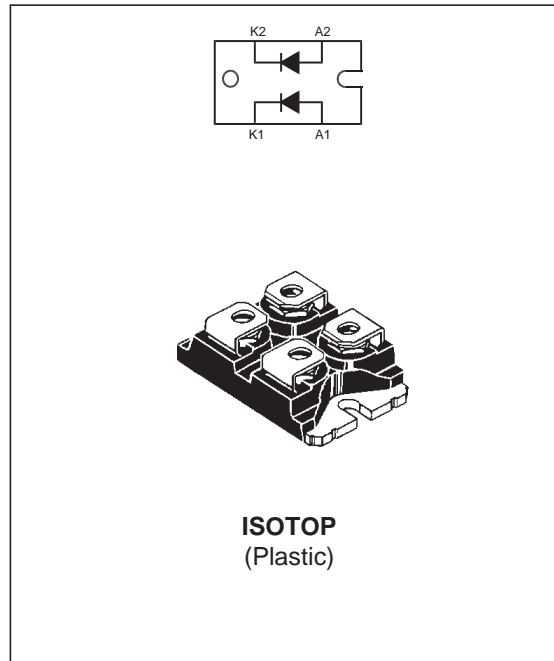

ABSOLUTE MAXIMUM RATINGS

Symbol	Parameter		Value	Unit
I _{F(RMS)}	RMS forward current		Per diode 150	A
I _{F(AV)}	Average forward current $\delta = 0.5$	T _c =110°C	Per diode 100	A
I _{FSM}	Surge non repetitive forward current	t _p =10ms sinusoidal	Per diode 1600	A
T _{stg} T _j	Storage and junction temperature range		- 40 to + 150 - 40 to + 150	°C °C

Symbol	Parameter	Value	Unit
V _{RRM}	Repetitive peak reverse voltage	200	V

ISOTOP is a trademark of STMicroelectronics.

BYV255V

THERMAL RESISTANCE

Symbol	Parameter		Value	Unit
Rth (j-c)	Junction to case	Per diode	0.4	°C/W
		Total	0.25	
Rth (c)	Coupling		0.1	°C/W

When the diodes 1 and 2 are used simultaneously :

$$T_j - T_c (\text{diode 1}) = P(\text{diode 1}) \times R_{th(j-c)}(\text{Per diode}) + P(\text{diode 2}) \times R_{th(c)}$$

ELECTRICAL CHARACTERISTICS (Per diode) STATIC CHARACTERISTICS

Symbol	Test Conditions		Min.	Typ.	Max.	Unit
I_R^*	$T_j = 25^\circ\text{C}$	$V_R = V_{RRM}$			100	μA
	$T_j = 100^\circ\text{C}$				10	mA
V_F^{**}	$T_j = 125^\circ\text{C}$	$I_F = 100 \text{ A}$			0.85	V
	$T_j = 125^\circ\text{C}$	$I_F = 200 \text{ A}$			1.00	
	$T_j = 25^\circ\text{C}$	$I_F = 200 \text{ A}$			1.15	

Pulse test : * $t_p = 5 \text{ ms}$, duty cycle < 2 %

** $t_p = 380 \mu\text{s}$, duty cycle < 2 %

RECOVERY CHARACTERISTICS

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
trr	$T_j = 25^\circ\text{C}$	$I_F = 0.5 \text{ A}$ $I_R = 1 \text{ A}$	$I_{rr} = 0.25 \text{ A}$			55	ns
		$I_F = 1 \text{ A}$ $V_R = 30 \text{ V}$	$dI_F/dt = -50 \text{ A}/\mu\text{s}$			80	
tfr	$T_j = 25^\circ\text{C}$	$I_F = 1 \text{ A}$ $V_{FR} = 1.1 \times V_F$	$t_r = 5 \text{ ns}$		10		ns
V_{FP}	$T_j = 25^\circ\text{C}$	$I_F = 1 \text{ A}$	$t_r = 5 \text{ ns}$		1.5		V

TURN-OFF SWITCHING CHARACTERISTICS

Symbol	Test Conditions			Min.	Typ.	Max.	Unit
I_{RM}	$T_j = 100^\circ\text{C}$	$I_F = 100 \text{ A}$ $L_p \text{ @ } 0.05 \mu\text{H}$ $V_{CC} \text{ @ } 0.6 V_{RRM}$	$dI_F/dt = -200 \text{ A}/\mu\text{s}$			16	A
			$dI_F/dt = -400 \text{ A}/\mu\text{s}$		24		

Fig.1 : Average forward power dissipation versus average forward current.

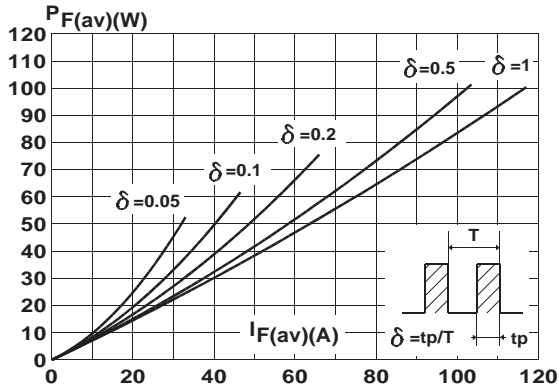


Fig.2 : Peak current versus form factor.

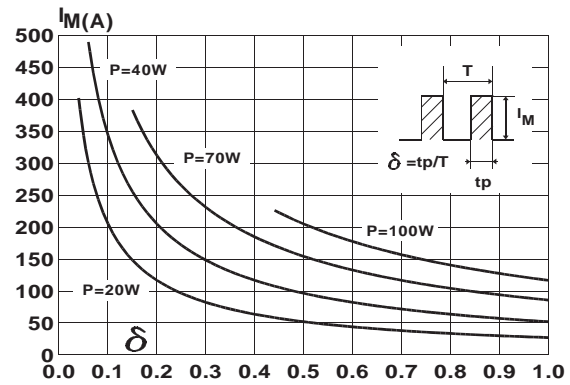


Fig.3 : Forward voltage drop versus forward current (maximum values).

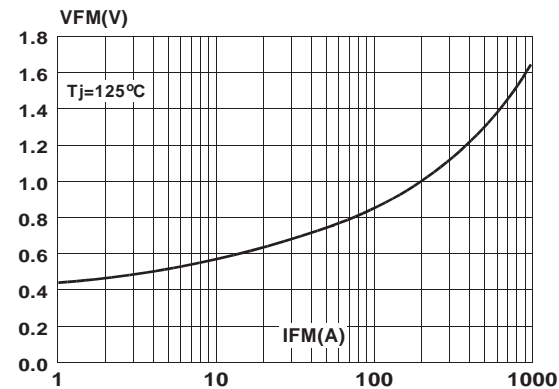


Fig.4 : Relative variation of thermal impedance junction to case versus pulse duration.

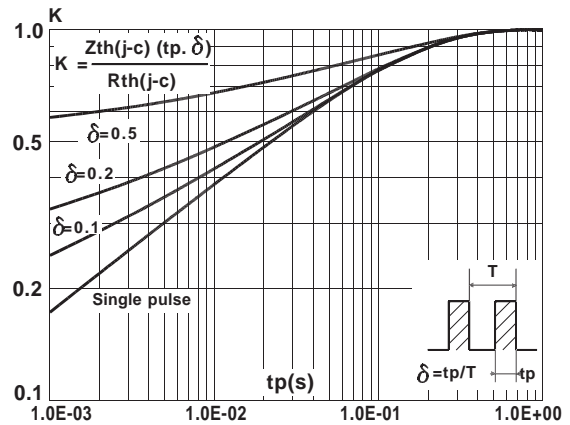


Fig.5 : Non repetitive surge peak forward current versus overload duration.


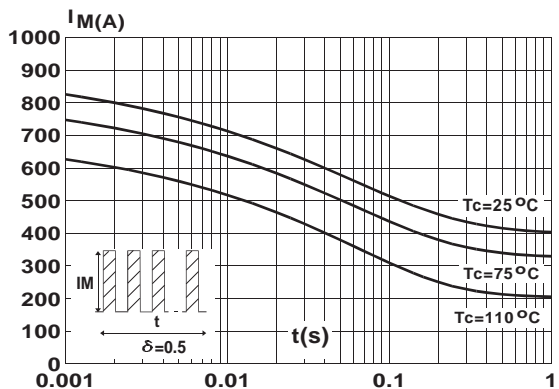


Fig.6 : Average current versus ambient temperature. (duty cycle : 0.5)

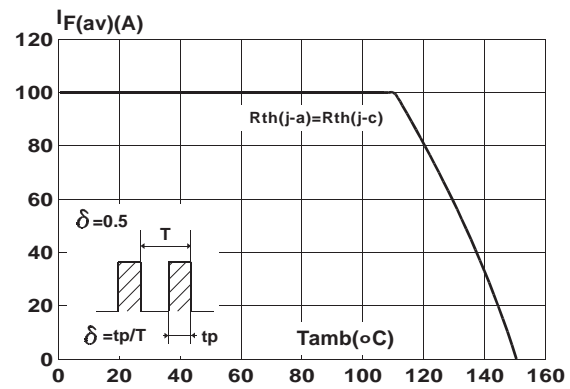

BYV255V

Fig.7 : Junction capacitance versus reverse voltage applied (Typical values).

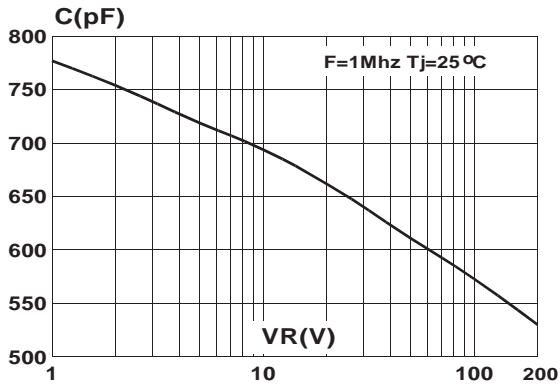


Fig.8 : Recovery charges versus dI_F/dt .

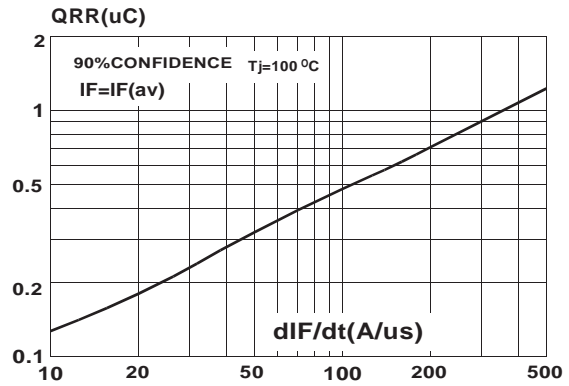


Fig.9 : Peak reverse current versus dI_F/dt .



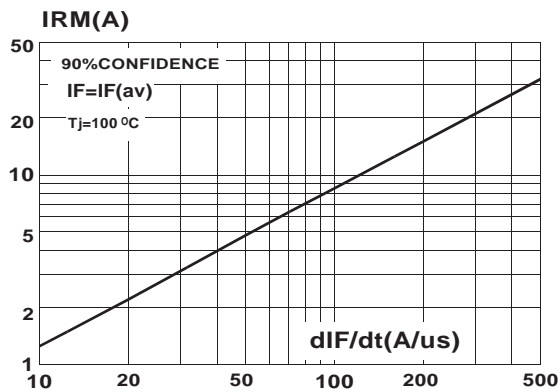


Fig.10 : Dynamic parameters versus junction temperature.

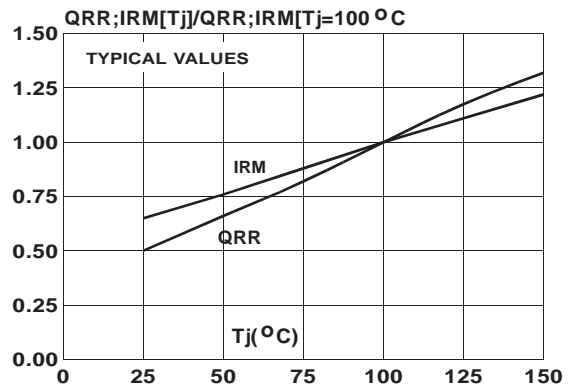

PACKAGE MECHANICAL DATA
ISOTOP

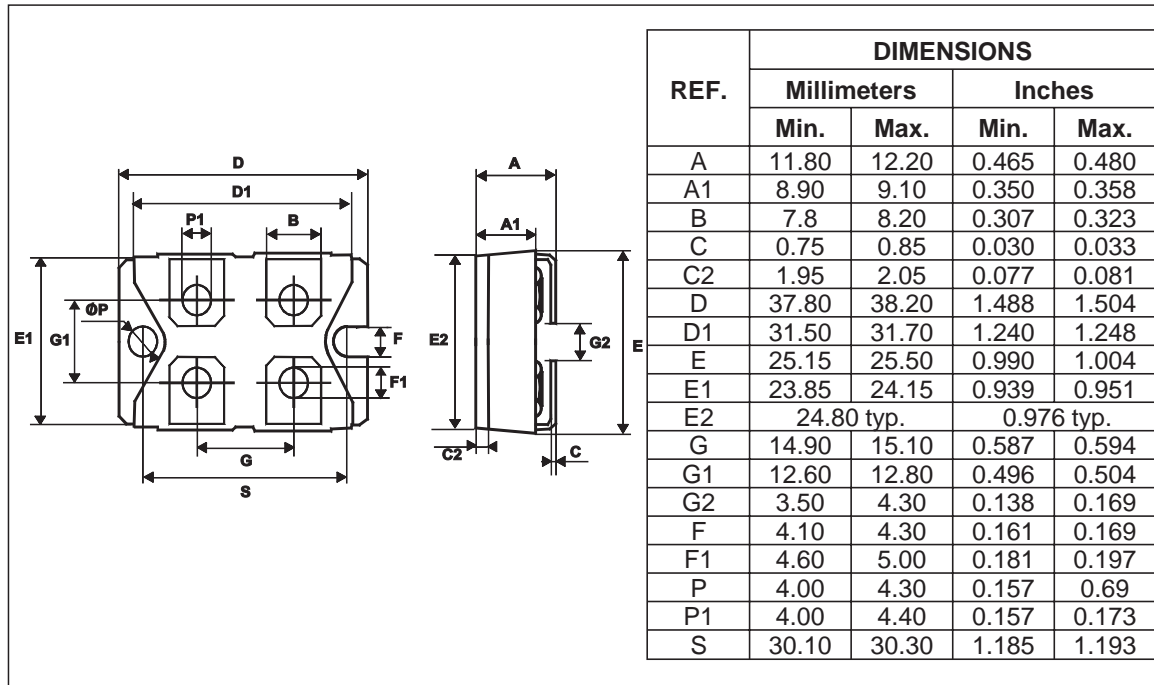

- **Marking** : Type number
- Cooling method : C
- Weight : 27 g
- Epoxy meets UL94, V0

Information furnished is believed to be accurate and reliable. However, STMicroelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of STMicroelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. STMicroelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of STMicroelectronics.

The ST logo is a registered trademark of STMicroelectronics

© 2000 STMicroelectronics - Printed in Italy - All rights reserved.

STMicroelectronics GROUP OF COMPANIES

Australia - Brazil - China - Finland - France - Germany - Hong Kong - India - Italy - Japan - Malaysia
Malta - Morocco - Singapore - Spain - Sweden - Switzerland - United Kingdom - U.S.A.

<http://www.st.com>

