

# TRANSISTOR MODULE

# QCA100A/QBB100A40/60


UL;E76102(M)

QCA100A and QBB100A is a dual Darlington power transistor modules with two high speed, high power Darlington transistors. Each transistor has a reverse paralleled fast recovery diode.

- QCA100A...Series-connected type
- QBB100A...Separate Type
- $I_C=100A$ ,  $V_{CEX}=400/600V$
- Low saturation voltage for higher efficiency.
- Isolated mounting base
- $V_{EBO}$  10V for faster switching speed.

**(Applications)**

Motor Control (VVF), AC/DC Servo, UPS, Switching Power Supply, Ultrasonic Application

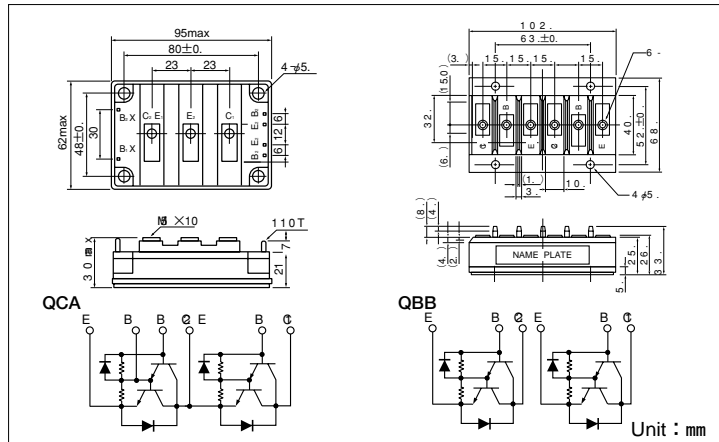

**Maximum Ratings**

( $T_j=25^{\circ}C$  unless otherwise specified)

Symbol	Item	Conditions	Ratings		Unit
			QCA100A40 QBB100A40	QCA100A60 QBB100A60	
$V_{CBO}$	Collector-Base Voltage		400	600	V
$V_{CEX}$	Collector-Emitter Voltage	$V_{BE}=-2V$	400	600	V
$V_{EBO}$	Emitter-Base Voltage		10		V
$I_C$	Collector Current	( ) $p_w \leq 1ms$	100 (200)		A
$-I_C$	Reverse Collector Current		100		A
$I_B$	Base Current		6		A
$P_T$	Total power dissipation	$T_c=25^{\circ}C$	620		W
$T_j$	Junction Temperature		-40 to +150		$^{\circ}C$
$T_{stg}$	Storage Temperature		-40 to +125		$^{\circ}C$
$V_{iso}$	Isolation Voltage	A.C.1minute	2500		V
	Mounting Torque	Mounting (M5)	Recommended Value 1.5-2.5 (15-25)		N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)		
	Mass	<b>QCA100A/QBB100A</b>	Typical Value		g

**Electrical Characteristics**

Symbol	Item	Conditions	Ratings		Unit	
			Min.	Max.		
$I_{CBO}$	Collector Cut-off Current	$V_{CB}=V_{CBO}$		1.0	mA	
$I_{EBO}$	Emitter Cut-off Current	$V_{EB}=V_{EBO}$		400	mA	
$V_{CEO(SUS)}$	Collector Emitter Sustaining Voltage	$I_C=1A$	QCA100A40 QBB100A40	300	V	
			QCA100A60 QBB100A60	450		
$V_{CEX(SUS)}$		$I_C=20A, I_{B2}=-5A$	QCA100A40 QBB100A40	400	V	
			QCA100A60 QBB100A60	600		
$h_{FE}$	DC Current Gain	$I_C=100A, V_{CE}=2V/5V$	75/100			
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=100A, I_B=1.4A$		2.0	V	
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=100A, I_B=1.4A$		2.5	V	
$t_{on}$	Switching Time	$V_{CC}=300V, I_C=100A$ $I_{B1}=2A, I_{B2}=-2A$		2.0	$\mu s$	
$t_s$			Storage Time			12.0
$t_f$			Fall Time			3.0
$V_{ECO}$	Collector-Emitter Reverse Voltage	$-I_C=100A$		1.4	V	
$R_{th(j-c)}$	Thermal Impedance	Transistor part/Diode part		0.2/0.6	$^{\circ}C/W$	



# QCA100A/QBB100A40/60

