


VS-IP20-IP20-94B-LI/5,0


Order No.: 1407903

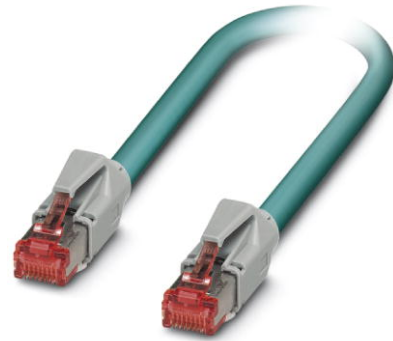

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1407903>

Assembled Ethernet cable, shielded, 4-pair, AWG 26 stranded (7-wire), RAL 5021 (sea blue), RJ45 connector/IP20 to RJ45 connector/IP20, line, length 5 m

Ethernet

Commercial data	
GTIN (EAN)	 4 046356 475419
Note	Made-to-order
sales group	D514
Pack	1 pcs.
Customs tariff	85444210
Catalog page information	Page 300 (PC-2011)

Product notes

WEEE/RoHS-compliant since:
11/24/2008



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

Mechanical characteristics

Number of positions	8
Shielded	Yes
Insertion/withdrawal cycles	≥ 750
Cable diameter	6.40 mm


Cable exit	Straight
Cable structure	4x2xAWG26/7; S-FTP
Smallest bending radius, fixed installation	min. 32 mm (cable, fixed installation)
Smallest bending radius, movable installation	min. 32 mm (cable, flexible installation)
Length of cable	5 m
Ambient temperature (operation)	-25 °C ... 60 °C (cable, fixed installation)
	-5 °C ... 60 °C (cable, flexible installation)

Material data

Inflammability class according to UL 94	V2
Outer sheath, material	PUR
External sheath, color	water blue RAL 5021
Degree of protection	IP20

Diagrams/Drawings

Dimensioned drawing

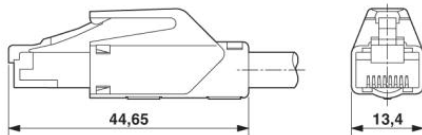

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2012 Phoenix Contact
Technical modifications reserved;

onlinecomponents.com