

REL-IR/L- 24AC/4X21AU

Order No.: 2834122

The figure shows the version: REL-IR/L-230AC/4X21 AUA version with a green relay cap and manual operation with snap-in function available only from the second quarter of 2009.




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=2834122>

Pluggable industrial relays with power contacts and additional hard gold plating, 4 PDT, test button, status LED, free-wheeling diode, mechanical switch position indicator, polarity **A1+**, **A2-**, coil voltage: 24 V AC

Commercial data	
GTIN (EAN)	4017918941680
sales group	G082
Pack	10 pcs.
Customs tariff	85364190
Weight/Piece	0.03583 KG
Catalog page information	Page 60 (IF-2009)

Product notes

WEEE/RoHS-compliant since: 06/08/2006



<http://www.download.phoenixcontact.com>
 Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data	
Coil side	
Nominal input voltage U_N	24 V AC
Nominal input current at U_{IN}	54 mA (at 50 Hz)
	46 mA (At 60 Hz)

Typical response time	4 ms ... 10 ms (AC, depending on phase relation)
Typical release time range	3 ms ... 12 ms (AC, depending on phase relation)
Coil resistance	180 Ω +/-15% (at 20°C)

Contact side

Contact type	Single contact, 4-PDT
Contact material	AgNi, hard gold-plated
Maximum switching voltage	250 V AC/DC
Minimum switching voltage	1 V
Maximum inrush current	12 A (15 ms)
Min. switching current	1 mA
Limiting continuous current	5 A
Interrupting rating (ohmic load) max.	1250 VA (for 250 V AC)

General data

Width	21.5 mm
Height	36 mm
Depth	28 mm
Test voltage relay winding/relay contact	2 kV AC (50 Hz, 1 min)
Test voltage relay contact/relay contact	2 kV AC (50 Hz, 1 min)
Ambient temperature (operation)	-55 °C ... 70 °C
Ambient temperature (storage/transport)	-55 °C ... 70 °C
Operating mode	100% operating factor
Service life mechanical	5 x 10 ⁷ cycles
Standards/regulations	EN 50178 IEC 62103
Pollution degree	2
Surge voltage category	II
Mounting position	Any
Assembly instructions	On relay base PR2

Connection data

Type of connection	Plug / solder connection
--------------------	--------------------------

Certificates / Approvals




Certification


CUL Listed, UL Listed, VDE-PZI

Diagrams/Drawings



Diagram

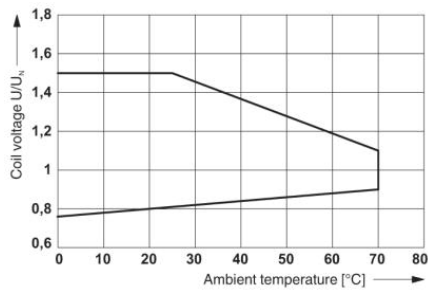


Operating voltage range

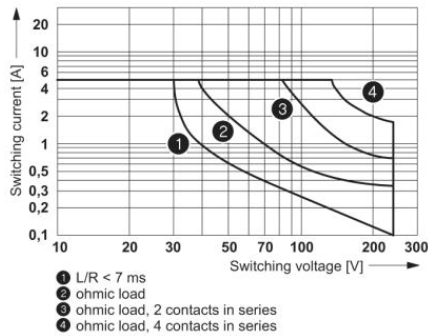

DC interrupting rating

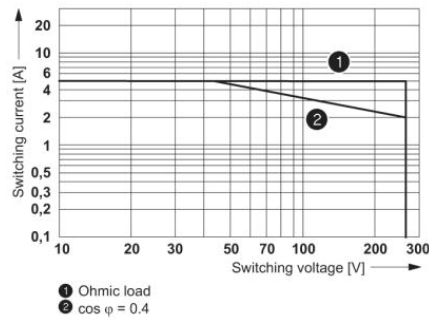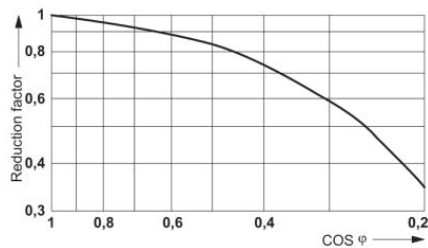


Interrupting rating

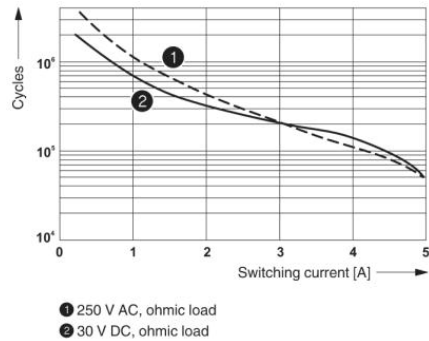

Electrical service life

Service life reduction factor

Circuit diagram

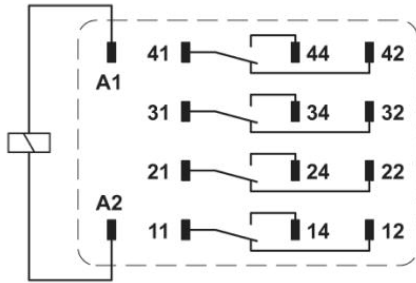

Shown without LED and damping diode.

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;