

HC-D 15-KML-48/O1PG16

Order No.: 1678266

The illustration shows version, HC-D 15-KML-48/M 1 PG 16




<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1678266>

Coupling housing, with single locking latch, height 48 mm, without screw connection, 1x Pg16

| Commercial data | |
|-----------------|---------------|
| GTIN (EAN) | 4017918151805 |
| Note | Made-to-order |
| sales group | D011 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Weight/Piece | 0.13284 KG |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

| General data | |
|--------------|---------------------------------|
| Note | For contact inserts HC-D15, A10 |
| Design | D15 |
| Height | 48 mm |
| Width | 29.5 mm |
| Length | 63 mm |

| | |
|---------------------------------|---------------------------|
| Housing type | Coupling housings |
| Locking type | With single locking latch |
| Type of the screw connection | 1x Pg16 |
| Pg screw connection | None |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |
| Material lock | Steel, galvanized |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

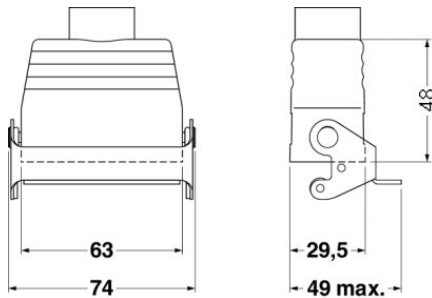

Address

PHOENIX CONTACT Inc., USA
586 Fulling Mill Road
Middletown, PA 17057, USA
Phone (800) 888-7388
Fax (717) 944-1625
<http://www.phoenixcon.com>



© 2010 Phoenix Contact
Technical modifications reserved;