

Options and Accessories

Connectors


Seven different connectors are available to simplify installation of LBB and PCA Series gaging probes, including the PCA Series Bi-directional Lever Probe. To select the proper connector, simply add the appropriate number to the end of the gage head part number. For example, by adding a 2 to a model number such as LBB375PA-020-2 allows the user to specify a standard sensitivity gage head with an Amphenol-type 126-195 connector.



| Connector Part Number | Description |
|-----------------------|--|
| Suffix | Description |
| 1 | Bendix-type PTO6A-10-6P (SR) |
| 2 | Amphenol-type 126-195 |
| 3 | Amphenol-type 165-13 |
| 4 | DE-9 compatible with Schaevitz® ATA2001 |
| 5 | Switchcraft-type 12CL5-M compatible with Schaevitz® SYS-96 Dimensional Data Acquisition System |
| 6 | LEMO-type CONN. FGG-OB-305-CNAD52 |
| 7 | Switchcraft-type 05BL5-M compatible with Schaevitz® MP series LVDT readout/controller |

Special Contact Tips

Nine different Schaevitz® contact tips are available for special applications and as replacements for standard tips supplied with most gage heads. All Schaevitz® contact points are 4-48 AGD threaded. To order, select the proper contact tip number.

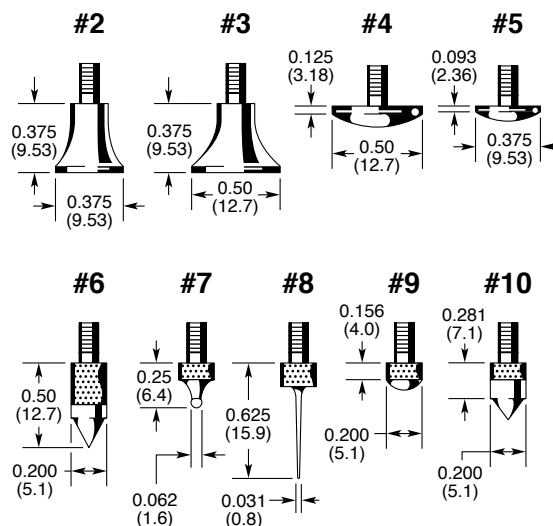

MS-Type Connector Cables

Consult factory for price and availability of adaptor cables for LVDTs and signal conditioners.