




Surface Mount Wideband RF Transformers

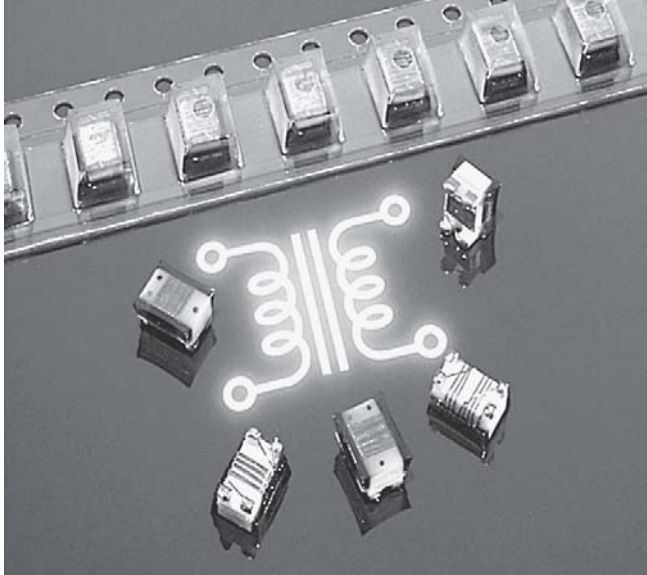

Available in a variety of impedance versions, Coilcraft's WBT Series chip transformers provide wide band pass performance in a small surface mount package.

The transformers are built on an 1812 size ferrite body with a ceramic base. They feature 50 V isolation and a 1/4 Watt RF input power rating. The top is a high temperature material that creates a flat surface for auto insertion. The parts are packaged in tape and reel for easy dispensing.

Applications include impedance matching, voltage or current transformation, DC isolation, balanced/unbalanced mixing, matching, power splitting, coupling and signal inversion.

To request free evaluation samples, contact Coilcraft or visit www.coilcraft.com.

1:1 Transformers

Part number	L per winding (μH)		Test frequency (MHz)	Imp. ratio pri:sec	DCR max (Ohms)		I_{DC} (mA)	Isolation (Vrms)	Insertion loss (dB)	Bandwidth (MHz)	Color dot
	pri	sec			pri	sec					
1812WBT-1	14		10	1:1	4.8		200	50	<1	0.340-22	Yellow
1812WBT-2	5.3		10	1:1	1.8		400	50	<1	0.800-60	Green
1812WBT-3	1.25		50	1:1	0.7		500	50	<1	4-200	White
1812WBT-4	0.220		50	1:1	0.3		700	50	<1	11-480	Orange
1812WBT-5	0.090		50	1:1	0.15		700	50	<1.5	48-645	Red

1.5:1 Transformers

Part number	L per winding (μH)		Test frequency (MHz)	Imp. ratio pri:sec	DCR max (Ohms)		I_{DC} (mA)	Isolation (Vrms)	Insertion loss (dB)	Bandwidth (MHz)	Color dot
	pri	sec			pri	sec					
1812WBT1.5-1	5.0	3.3	10	1.5:1	1.05	0.87	400	50	0.5	1.3-100	Red
1812WBT1.5-2	2.5	1.6	10	1.5:1	0.74	0.58	500	50	0.5	2.75-135	Orange
1812WBT1.5-3	1.0	0.6	10	1.5:1	0.43	0.34	500	50	0.75	7.2-200	Yellow
1812WBT1.5-4	0.144	0.090	10	1.5:1	0.18	0.14	700	50	2.25	38-535	Green

2:1 Transformers

Part number	L per winding (μH)		Test frequency (MHz)	Imp. ratio pri:sec	DCR max (Ohms)		I_{DC} (mA)	Isolation (Vrms)	Insertion loss (dB)	Bandwidth (MHz)	Color dot
	pri	sec			pri	sec					
1812WBT2-1	13.80	6.90	10	2:1	4.6	3.2	200	50	<1.5	0.800-23	Brown
1812WBT2-2	5.850	2.925	10	2:1	1.25	0.95	400	50	<1.5	2.2-65	Red
1812WBT2-3	2.60	1.30	10	2:1	0.52	0.42	600	50	<1.5	4-105	Orange
1812WBT2-4	0.910	0.455	50	2:1	0.27	0.23	700	50	<1.5	11-200	Yellow

1. Operating temperature range -40°C to +85°C.
2. Electrical specifications at 25°C.






Coilcraft[®]

Specifications subject to change without notice.

Please check our website for latest information. Document 117-1 Revised 11/04/03


1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469

E-mail info@coilcraft.com Web <http://www.coilcraft.com>

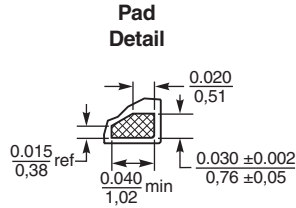


Weight: 131 – 152 mg
Terminations: Nickel/gold over moly-manganese
Tape and reel: 600/7" reel; 2200/13" reel 12 mm tape width
 For packaging data see Tape and Reel Specifications section.


Typical Frequency Attenuation 1:1 Transformers

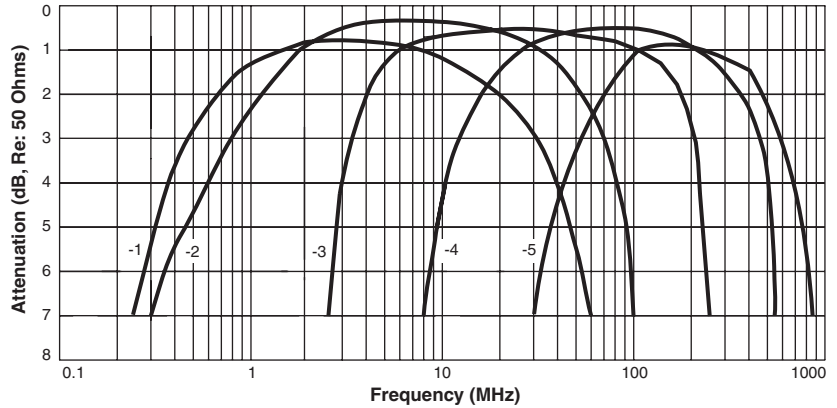

Typical Frequency Attenuation 1.5:1 Transformers

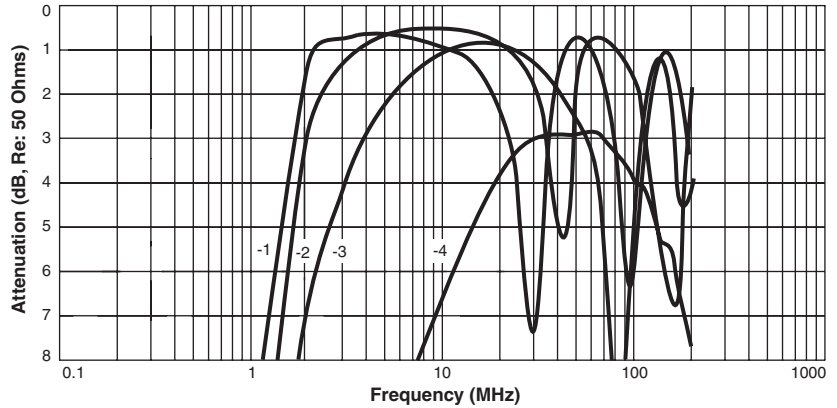

Typical Frequency Attenuation 2:1 Transformers

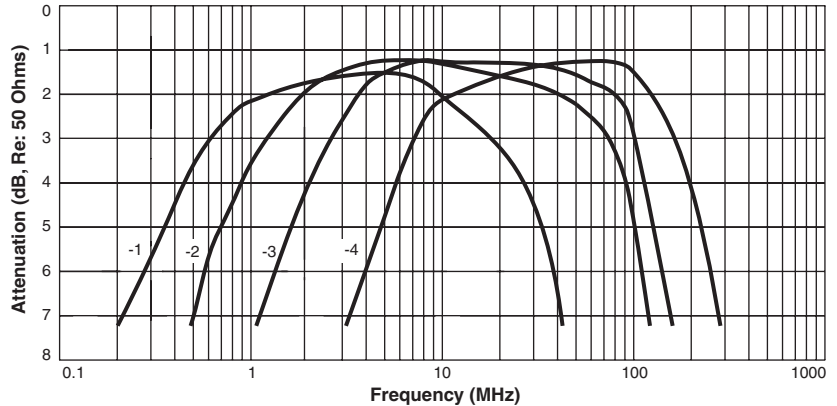

Specifications subject to change without notice.
 Please check our website for latest information. Document 117-2 Revised 12/15/04

1102 Silver Lake Road Cary, Illinois 60013 Phone 847/639-6400 Fax 847/639-1469
 E-mail info@coilcraft.com Web http://www.coilcraft.com