



## FEATURES AND SPECIFICATIONS

**Molex expands its offering of Voltage Regulator Module (VRM) connectors with the addition of a 24-signal, 38-power circuit configuration**

The necessity for a highly efficient DC-to-DC power conversion to be located close to the processor is vital, especially in today's high performance microprocessors. Molex provides such a solution in the iCool™ Low Profile VRM connectors. Incorporating a low loop inductance design, the iCool is created exclusively for high output currents at high slew rates for applications like servers, PCs and workstations.

Designed for both the VRM 10.0 and 11.0 applications, these VRM connectors handle up to 150 amps of current (based on 400 FLM) in the 4.00" connectors under ambient temperatures of up to 60°C. Configurations of 200A or more.

This new revision includes the series 78086. This new surface-mount version has a lower profile and narrower body compared to the rest of VRM connectors. This provides greater options for customers who have real estate constraints in their design.

### Features

- High-temperature thermoplastic housing
- Open housing design
- Four beveled metal pins (Forklocks)
- Low loop inductance design
- Plastic locating peg
- Unique reverse angle latch notch feature

### Benefits

- Withstands lead-free process
- Allows air flow to cool the contacts
- Secure connectors to PCB against shock and vibration
- Ideal for high slew rates characteristics
- Ensures proper insertion and polarization on the PCB
- Retains the VR Module securely during shock and vibration

## 1.00mm (.039") Pitch iCool™ Low Profile VRM Connector

**87786, 78086**

**Vertical, Surface Mount**

**87787, 87810**


**Vertical, Through Hole**

**87818**

**Right Angle, Through Hole**



iCool Vertical versions

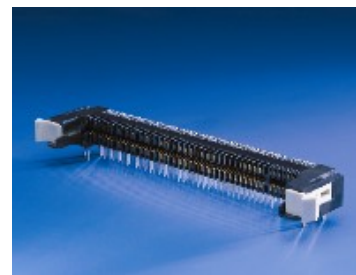

iCool Right Angle versions

## SPECIFICATIONS

### Reference Information

Packaging: Tray  
Mates With: Voltage Regulator Module  
Designed In: Millimeters

### Electrical

Voltage : Power: 48V  
Signal: 48V

Current : Refer to Temperature Rise Chart on Page 3

Contact Resistance :  
For series 87786, 87787, 87810 and 78086  
Power 5 milliohms max.  
Signal 10 milliohms max.

For series 87818  
Power 7.5 milliohms max.  
Signal 15 milliohms max.

Dielectric Withstanding Voltage: 1100V AC

Insulation Resistance: 5000 Megohms min.

### Mechanical

Contact Retention to Housing:  
For series 87786, 87787, 87810 and 78086  
Power: 3.43N min/pin  
Signal: 3.43N min/pin

For series 87818  
Power: 4.90N min/pin  
Signal: 3.43N min/pin.

Insertion Force to PCB (Total):  
For series 87786, 87787, 87818 and 78086  
90.22N max.

For Series 87810  
45.11N max.

Mating Force: 245.25N max.

Unmating Force:  
For series 87786, 87787, 87818 and 78086  
88.26N max. (Force required to open latches)

For series 87810 (No latch)  
98.1N min. (Force required to pull out module directly)

Durability : 25 cycles

### Physical

Housing: Thermoplastic, high temperature, UL 94V-0  
Contact: Copper (Cu) Alloy  
Plating:  
Contact Area — 0.76µm(30µ") Gold  
Solder tail plating – Tin(Sn), Lead-free  
Underplating — Nickel (Ni)  
Operating Temperature: -10°C to +105°C

## MARKETS AND APPLICATIONS



## 1.00mm (.039") Pitch iCool™ Low Profile VRM Connector

**87786, 78086**


**Vertical, Surface Mount**

**87787, 87810**

**Vertical, Through Hole**

**87818**

**Right Angle, Through Hole**

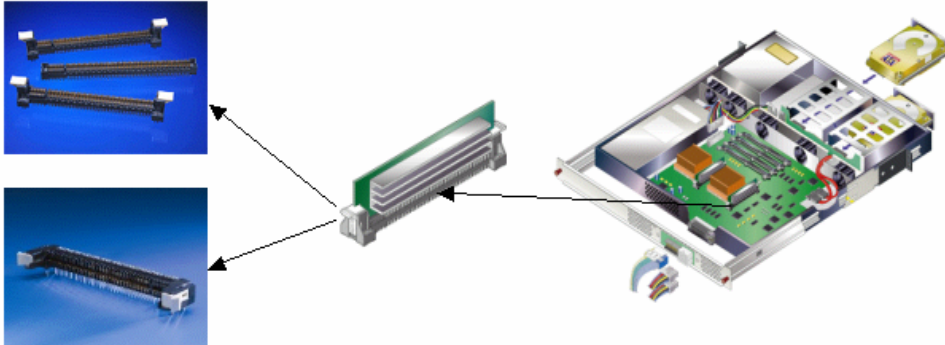

## ORDERING INFORMATION

	Lead-Free Order No.	Description	Circuits Details
	78086-0001	Vertical, Surface Mount with Latches	Signal 24, Power 38
	87786-1002	Vertical, Surface Mount with Latches	Signal 20, Power 72
	87786-1011	Vertical, Surface Mount with Latches	Signal 24, Power 70
	87787-1002	Vertical, Through Hole with Latches	Signal 20, Power 72
	87787-1011	Vertical, Through Hole with Latches	Signal 24, Power 70
	87810-1001	Vertical, Through Hole without Tower	Signal 22, Power 88
	87810-1002	Vertical, Through Hole with Tower	Signal 22, Power 88
	87818-1001	Right Angle, Through Hole with Latches	Signal 20, Power 72



**Americas Headquarters**  
2222 Wellington Ct.  
Lisle, Illinois 60532 USA  
1-800-78MOLEX  
amerinfo@molex.com

**Asia Pacific North Headquarters**  
Yamato, Kanagawa, Japan  
81-462-65-2324  
ferinfo@molex.com

**Asia Pacific South Headquarters**  
Jurong, Singapore  
65-6-268-6868  
fesinfo@molex.com

**European Headquarters**  
Munich, Germany  
49-89-413092-0  
eurinfo@molex.com

**Corporate Headquarters**  
2222 Wellington Ct.  
Lisle, Illinois 60532 USA  
630-969-4550

Visit our Web site at <http://www.molex.com>

Order No. 9876501682

©2008, Molex