

Surface Mount TRANSZORB® Transient Voltage Suppressors



DO-214AC (SMA)

| MAJOR RATINGS AND CHARACTERISTICS | |
|-----------------------------------|----------------|
| V_{WM} | 5.0 V to 188 V |
| P_{PPM} | 400 W, 300 W |
| I_{FSM} | 40 A |
| T_j max. | 150 °C |

DEVICES FOR BIDIRECTION APPLICATIONS

For bidirectional use C or CA suffix (e.g. SMAJ10C, SMAJ10CA).

Electrical characteristics apply in both directions.

FEATURES

- Low profile package
- Ideal for automated placement
- Glass passivated chip junction
- Available in Unidirectional and Bidirectional
- 400 W peak pulse power capability with a 10/1000 μ s waveform, repetitive rate (duty cycle): 0.01 % (300 W above 78 V)
- Excellent clamping capability
- Very fast response time
- Low incremental surge resistance
- Meets MSL level 1, per J-STD-020C, LF max peak of 260 °C
- Solder Dip 260 °C, 40 seconds
- Component in accordance to RoHS 2002/95/EC and WEEE 2002/96/EC



TYPICAL APPLICATIONS

Use in sensitive electronics protection against voltage transients induced by inductive load switching and lighting on ICs, MOSFET, signal lines of sensor units for consumer, computer, industrial, automotive and telecommunication.

MECHANICAL DATA

Case: DO-214AC (SMA)

Epoxy meets UL 94V-0 flammability rating

Terminals: Matte tin plated leads, solderable per J-STD-002B and JESD22-B102D

E3 suffix for commercial grade, HE3 suffix for high reliability grade (AEC Q101 qualified)

Polarity: Color band denotes cathode end

| MAXIMUM RATINGS ($T_A = 25$ °C unless otherwise noted) | | | |
|---|----------------|----------------|------|
| PARAMETER | SYMBOL | VALUE | UNIT |
| Peak pulse power dissipation with a 10/1000 μ s waveform ^(1,2) (see Fig. 1) | P_{PPM} | 400 | W |
| Peak pulse current with a waveform ⁽¹⁾ | I_{PPM} | see next table | A |
| Peak forward surge current 8.3 ms single half sine-wave uni-directional only ⁽²⁾ | I_{FSM} | 40 | A |
| Operating junction and storage temperature range | T_J, T_{STG} | - 55 to + 150 | °C |

Note:

(1) Non-repetitive current pulse, per Fig. 3 and derated above $T_A = 25$ °C per Fig. 2. Rating is 300 W above 78 V

(2) Mounted on 0.2 x 0.2" (5.0 x 5.0 mm) copper pads to each terminal



| ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | | | | |
|--|---------------------|----|--|------|-------------------------|--------------------------------|--|---|---|
| DEVICE TYPE | DEVICE MARKING CODE | | BREAKDOWN VOLTAGE $V_{(BR)}$ AT I_T ⁽¹⁾ (V) | | TEST CURRENT I_T (mA) | STAND-OFF VOLTAGE V_{WM} (V) | MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA) ⁽³⁾ | MAXIMUM PEAK PULSE SURGE CURRENT I_{PPM} (A) ⁽²⁾ | MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V) |
| | UNI | BI | MIN | MAX | | | | | |
| SMAJ5.0 | AD | WD | 6.40 | 7.82 | 10 | 5.0 | 800 | 41.7 | 9.6 |
| SMAJ5.0A ⁽⁵⁾ | AE | WE | 6.40 | 7.07 | 10 | 5.0 | 800 | 43.5 | 9.2 |
| SMAJ6.0 | AF | WF | 6.67 | 8.15 | 10 | 6.0 | 800 | 35.1 | 11.4 |
| SMAJ6.0A | AG | WG | 6.67 | 7.37 | 10 | 6.0 | 800 | 38.8 | 10.3 |
| SMAJ6.5 | AH | WH | 7.22 | 8.82 | 10 | 6.5 | 500 | 32.5 | 12.3 |
| SMAJ6.5A | AK | WK | 7.22 | 7.98 | 10 | 6.5 | 500 | 35.7 | 11.2 |
| SMAJ7.0 | AL | WL | 7.78 | 9.51 | 10 | 7.0 | 200 | 30.1 | 13.3 |
| SMAJ7.0A | AM | WM | 7.78 | 8.60 | 10 | 7.0 | 200 | 33.3 | 12.0 |
| SMAJ7.5 | AN | WN | 8.33 | 10.2 | 1.0 | 7.5 | 100 | 28.0 | 14.3 |
| SMAJ7.5A | AP | WP | 8.33 | 9.21 | 1.0 | 7.5 | 100 | 31.0 | 12.9 |
| SMAJ8.0 | AQ | WQ | 8.89 | 10.9 | 1.0 | 8.0 | 50 | 26.7 | 15.0 |
| SMAJ8.0A | AR | WR | 8.89 | 9.83 | 1.0 | 8.0 | 50 | 29.4 | 13.6 |
| SMAJ8.5 | AS | WS | 9.44 | 11.5 | 1.0 | 8.5 | 10 | 25.2 | 15.9 |
| SMAJ8.5A | AT | WT | 9.44 | 10.4 | 1.0 | 8.5 | 10 | 27.8 | 14.4 |
| SMAJ9.0 | AU | WU | 10.0 | 12.2 | 1.0 | 9.0 | 5.0 | 23.7 | 16.9 |
| SMAJ9.0A | AV | WV | 10.0 | 11.1 | 1.0 | 9.0 | 5.0 | 26.0 | 15.4 |
| SMAJ10 | AW | WW | 11.1 | 13.6 | 1.0 | 10 | 1.0 | 21.3 | 18.8 |
| SMAJ10A | AX | WX | 11.1 | 12.3 | 1.0 | 10 | 1.0 | 23.5 | 17.0 |
| SMAJ11 | AY | WY | 12.2 | 14.9 | 1.0 | 11 | 1.0 | 19.9 | 20.1 |
| SMAJ11A | AZ | WZ | 12.2 | 13.5 | 1.0 | 11 | 1.0 | 22.0 | 18.2 |
| SMAJ12 | BD | XD | 13.3 | 16.3 | 1.0 | 12 | 1.0 | 18.2 | 22.0 |
| SMAJ12A | BE | XE | 13.3 | 14.7 | 1.0 | 12 | 1.0 | 20.1 | 19.9 |
| SMAJ13 | BF | XF | 14.4 | 17.6 | 1.0 | 13 | 1.0 | 16.8 | 23.8 |
| SMAJ13A | BG | XG | 14.4 | 15.9 | 1.0 | 13 | 1.0 | 18.6 | 21.5 |
| SMAJ14 | BH | XH | 15.6 | 19.1 | 1.0 | 14 | 1.0 | 15.5 | 25.8 |
| SMAJ14A | BK | XK | 15.6 | 17.2 | 1.0 | 14 | 1.0 | 17.2 | 23.2 |
| SMAJ15 | BL | XL | 16.7 | 20.4 | 1.0 | 15 | 1.0 | 14.9 | 26.9 |
| SMAJ15A | BM | XM | 16.7 | 18.5 | 1.0 | 15 | 1.0 | 16.4 | 24.4 |
| SMAJ16 | BN | XN | 17.8 | 21.8 | 1.0 | 16 | 1.0 | 13.9 | 28.8 |
| SMAJ16A | BP | XP | 17.8 | 19.7 | 1.0 | 16 | 1.0 | 15.4 | 26.0 |
| SMAJ17 | BQ | XQ | 18.9 | 23.1 | 1.0 | 17 | 1.0 | 13.1 | 30.5 |
| SMAJ17A | BR | XR | 18.9 | 20.9 | 1.0 | 17 | 1.0 | 14.5 | 27.6 |
| SMAJ18 | BS | XS | 20.0 | 24.4 | 1.0 | 18 | 1.0 | 12.4 | 32.2 |
| SMAJ18A | BT | XT | 20.0 | 22.1 | 1.0 | 18 | 1.0 | 13.7 | 29.2 |
| SMAJ20 | BU | XU | 22.2 | 27.1 | 1.0 | 20 | 1.0 | 11.2 | 35.8 |
| SMAJ20A | BV | XV | 22.2 | 24.5 | 1.0 | 20 | 1.0 | 12.3 | 32.4 |
| SMAJ22 | BW | XW | 24.4 | 29.8 | 1.0 | 22 | 1.0 | 10.2 | 39.4 |
| SMAJ22A | BX | XX | 24.4 | 26.9 | 1.0 | 22 | 1.0 | 11.3 | 35.5 |
| SMAJ24 | BY | XY | 26.7 | 32.6 | 1.0 | 24 | 1.0 | 9.3 | 43.0 |
| SMAJ24A | BZ | XZ | 26.7 | 29.5 | 1.0 | 24 | 1.0 | 10.3 | 38.9 |
| SMAJ26 | CD | YD | 28.9 | 35.3 | 1.0 | 26 | 1.0 | 8.6 | 46.6 |
| SMAJ26A | CE | YE | 28.9 | 31.9 | 1.0 | 26 | 1.0 | 9.5 | 42.1 |
| SMAJ28 | CF | YF | 31.1 | 38.0 | 1.0 | 28 | 1.0 | 8.0 | 50.0 |
| SMAJ28A | CG | YG | 31.1 | 34.4 | 1.0 | 28 | 1.0 | 8.8 | 45.4 |
| SMAJ30 | CH | YH | 33.3 | 40.7 | 1.0 | 30 | 1.0 | 7.5 | 53.5 |
| SMAJ30A | CK | YK | 33.3 | 36.8 | 1.0 | 30 | 1.0 | 8.3 | 48.4 |
| SMAJ33 | CL | YL | 36.7 | 44.9 | 1.0 | 33 | 1.0 | 6.8 | 59.0 |
| SMAJ33A | CM | YM | 36.7 | 40.6 | 1.0 | 33 | 1.0 | 7.5 | 53.3 |
| SMAJ36 | CN | YN | 40.0 | 48.9 | 1.0 | 36 | 1.0 | 6.2 | 64.3 |
| SMAJ36A | CP | YP | 40.0 | 44.2 | 1.0 | 36 | 1.0 | 6.9 | 58.1 |
| SMAJ40 | CQ | YQ | 44.4 | 54.3 | 1.0 | 40 | 1.0 | 5.6 | 71.4 |



| ELECTRICAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted) | | | | | | | | | |
|--|---------------------|--|--|------|-------------------------|--------------------------------|--|---|---|
| DEVICE TYPE | DEVICE MARKING CODE | | BREAKDOWN VOLTAGE $V_{(BR)}$ AT I_T ⁽¹⁾ (V) | | TEST CURRENT I_T (mA) | STAND-OFF VOLTAGE V_{WM} (V) | MAXIMUM REVERSE LEAKAGE AT V_{WM} I_D (μA) ⁽³⁾ | MAXIMUM PEAK PULSE SURGE CURRENT I_{PPM} (A) ⁽²⁾ | MAXIMUM CLAMPING VOLTAGE AT I_{PPM} V_C (V) |
| | UNI | BI | MIN | MAX | | | | | |
| SMAJ40A | CR | YR | 44.4 | 49.1 | 1.0 | 40 | 1.0 | 6.2 | 64.5 |
| SMAJ43 | CS | YS | 47.8 | 58.4 | 1.0 | 43 | 1.0 | 5.2 | 76.7 |
| SMAJ43A | CT | YT | 47.8 | 52.8 | 1.0 | 43 | 1.0 | 5.8 | 69.4 |
| SMAJ45 | CU | YU | 50.0 | 61.1 | 1.0 | 45 | 1.0 | 5.0 | 80.3 |
| SMAJ45A | CV | YV | 50.0 | 55.3 | 1.0 | 45 | 1.0 | 5.5 | 72.7 |
| SMAJ48 | CW | YW | 53.3 | 65.1 | 1.0 | 48 | 1.0 | 4.7 | 85.5 |
| SMAJ48A | CX | YX | 53.3 | 58.9 | 1.0 | 48 | 1.0 | 5.2 | 77.4 |
| SMAJ51 | CY | YY | 56.7 | 69.3 | 1.0 | 51 | 1.0 | 4.4 | 91.1 |
| SMAJ51A | CZ | YZ | 56.7 | 62.7 | 1.0 | 51 | 1.0 | 4.9 | 82.4 |
| SMAJ54 | RD | ZD | 60.0 | 73.3 | 1.0 | 54 | 1.0 | 4.2 | 96.3 |
| SMAJ54A | RE | ZE | 60.0 | 66.3 | 1.0 | 54 | 1.0 | 4.6 | 87.1 |
| SMAJ58 | RF | ZF | 64.4 | 78.7 | 1.0 | 58 | 1.0 | 3.9 | 103 |
| SMAJ58A | RG | ZG | 64.4 | 71.2 | 1.0 | 58 | 1.0 | 4.3 | 93.6 |
| SMAJ60 | RH | ZH | 66.7 | 81.5 | 1.0 | 60 | 1.0 | 3.7 | 107 |
| SMAJ60A | RK | ZK | 66.7 | 73.7 | 1.0 | 60 | 1.0 | 4.1 | 96.8 |
| SMAJ64 | RL | ZL | 71.1 | 86.9 | 1.0 | 64 | 1.0 | 3.5 | 114 |
| SMAJ64A | RM | ZM | 71.1 | 78.6 | 1.0 | 64 | 1.0 | 3.9 | 103 |
| SMAJ70 | RN | ZN | 77.8 | 95.1 | 1.0 | 70 | 1.0 | 3.2 | 125 |
| SMAJ70A | RP | ZP | 77.8 | 86.0 | 1.0 | 70 | 1.0 | 3.5 | 113 |
| SMAJ75 | RQ | ZQ | 83.3 | 102 | 1.0 | 75 | 1.0 | 3.0 | 134 |
| SMAJ75A | RR | ZR | 83.3 | 92.1 | 1.0 | 75 | 1.0 | 3.3 | 121 |
| SMAJ78 | RS | ZS | 86.7 | 106 | 1.0 | 78 | 1.0 | 2.9 | 139 |
| SMAJ78A | RT | ZT | 86.7 | 95.8 | 1.0 | 78 | 1.0 | 3.2 | 126 |
| SMAJ85 | RU | ZU | 94.4 | 115 | 1.0 | 85 | 1.0 | 2.0 | 151 |
| SMAJ85A | RV | ZV | 94.4 | 104 | 1.0 | 85 | 1.0 | 2.2 | 137 |
| SMAJ90 | RW | ZW | 100 | 122 | 1.0 | 90 | 1.0 | 1.9 | 160 |
| SMAJ90A | RX | ZX | 100 | 111 | 1.0 | 90 | 1.0 | 2.1 | 146 |
| SMAJ100 | RY | ZY | 111 | 136 | 1.0 | 100 | 1.0 | 1.7 | 179 |
| SMAJ100A | RZ | <td>111</td> <td>123</td> <td>1.0</td> <td>100</td> <td>1.0</td> <td>1.9</td> <td>162</td> | 111 | 123 | 1.0 | 100 | 1.0 | 1.9 | 162 |
| SMAJ110 | VD | VD | 122 | 149 | 1.0 | 110 | 1.0 | 1.5 | 196 |
| SMAJ110A | SE | VE | 122 | 135 | 1.0 | 110 | 1.0 | 1.7 | 177 |
| SMAJ120 | SF | VF | 133 | 163 | 1.0 | 120 | 1.0 | 1.4 | 214 |
| SMAJ120A | VG | VG | 133 | 147 | 1.0 | 120 | 1.0 | 1.6 | 193 |
| SMAJ130 | SH | VH | 144 | 176 | 1.0 | 130 | 1.0 | 1.3 | 231 |
| SMAJ130A | VK | VK | 144 | 159 | 1.0 | 130 | 1.0 | 1.4 | 209 |
| SMAJ150 | SL | VL | 167 | 204 | 1.0 | 150 | 1.0 | 1.1 | 268 |
| SMAJ150A | VM | VM | 167 | 185 | 1.0 | 150 | 1.0 | 1.2 | 243 |
| SMAJ160 | SN | VN | 178 | 218 | 1.0 | 160 | 1.0 | 1.0 | 287 |
| SMAJ160A | SP | VP | 178 | 197 | 1.0 | 160 | 1.0 | 1.2 | 259 |
| SMAJ170 | SQ | VQ | 189 | 231 | 1.0 | 170 | 1.0 | 0.99 | 304 |
| SMAJ170A | SR | VR | 189 | 209 | 1.0 | 170 | 1.0 | 1.09 | 275 |
| SMAJ188 | ST | VT | 209 | 255 | 1.0 | 188 | 1.0 | 0.90 | 344 |
| SMAJ188A | SS | VS | 209 | 231 | 1.0 | 188 | 1.0 | 0.91 | 328 |

Note:

- (1) Pulse test: $t_p \leq 50\text{ ms}$
- (2) Surge current waveform per Fig. 3 and derate per Fig. 2
- (3) For bi-directional types having V_{WM} of 10 Volts and less, the I_D limit is doubled
- (4) All terms and symbols are consistent with ANSI/IEEE C62.35
- (5) For the bidirectional SMAJ5.0CA, the maximum $V_{(BR)}$ is 7.25 V
- (6) $V_F = 3.5\text{ V}$ at $I_F = 25\text{ A}$ (uni-directional only)

THERMAL CHARACTERISTICS ($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

| PARAMETER | SYMBOL | VALUE | UNIT |
|--|-----------------|-------|--------------------|
| Typical thermal resistance, junction to ambient ⁽¹⁾ | $R_{\theta JA}$ | 120 | $^\circ\text{C/W}$ |
| Typical thermal resistance, junction to lead | $R_{\theta JL}$ | 30 | $^\circ\text{C/W}$ |

Note:

(1) Mounted on minimum recommended pad layout

ORDERING INFORMATION

| PREFERRED P/N | UNIT WEIGHT (g) | PREFERRED PACKAGE CODE | BASE QUANTITY | DELIVERY MODE |
|----------------|-----------------|------------------------|---------------|----------------------------------|
| SMAJ5.0A-E3/61 | 0.064 | 61 | 1800 | 7" Diameter Plastic Tape & Reel |
| SMAJ5.0A-E3/5A | 0.064 | 5A | 7500 | 13" Diameter Plastic Tape & Reel |

RATINGS AND CHARACTERISTICS CURVES

($T_A = 25\text{ }^\circ\text{C}$ unless otherwise noted)

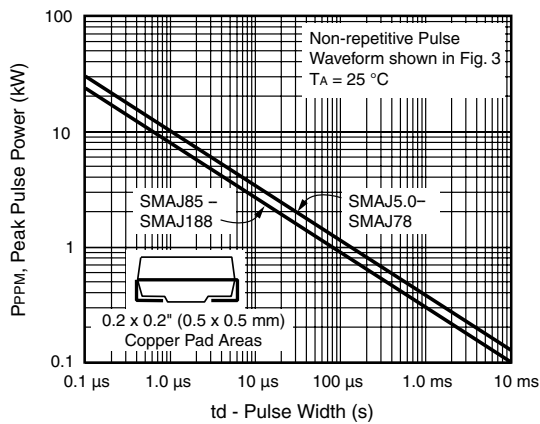


Figure 1. Peak Pulse Power Rating Curve

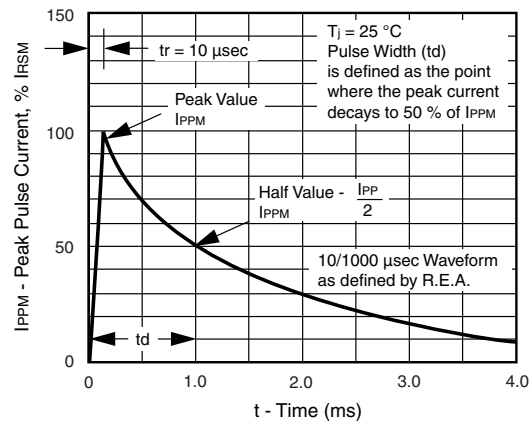


Figure 3. Pulse Waveform

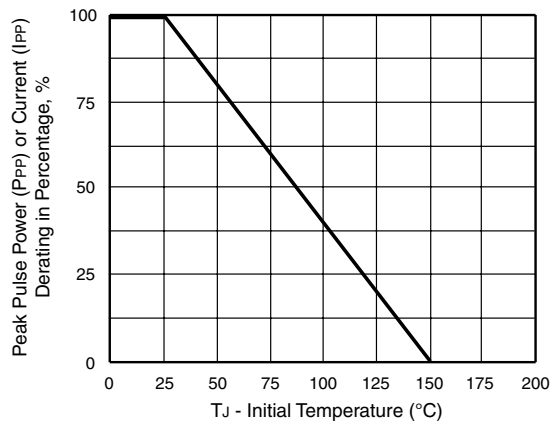


Figure 2. Pulse Power or Current versus Initial Junction Temperature

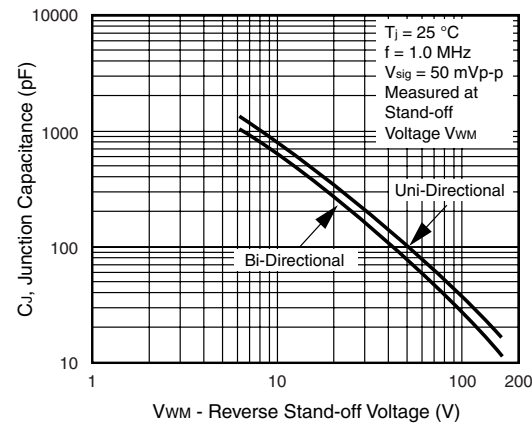


Figure 4. Typical Junction Capacitance

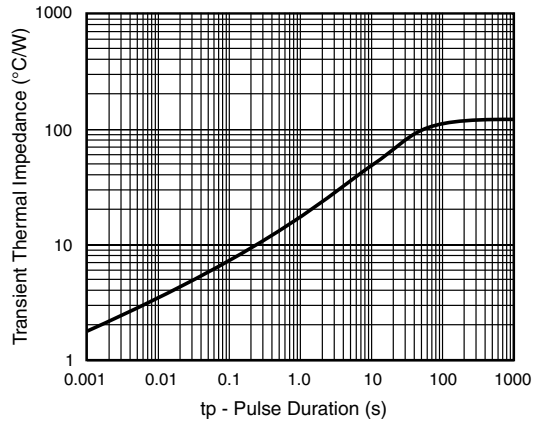


Figure 5. Typical Transient Thermal Impedance


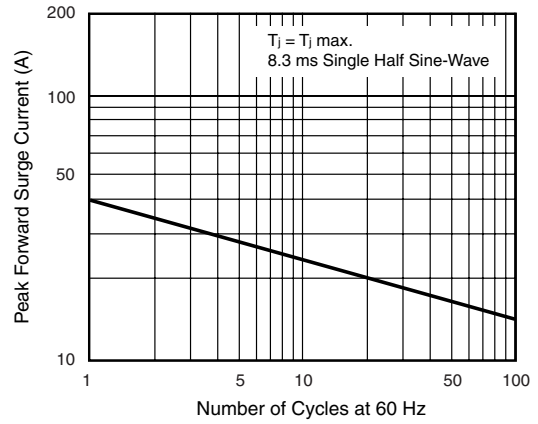


Figure 6. Maximum Non-Repetitive Forward Surge Current Uni-Directional Only

PACKAGE OUTLINE DIMENSIONS in inches (millimeters)



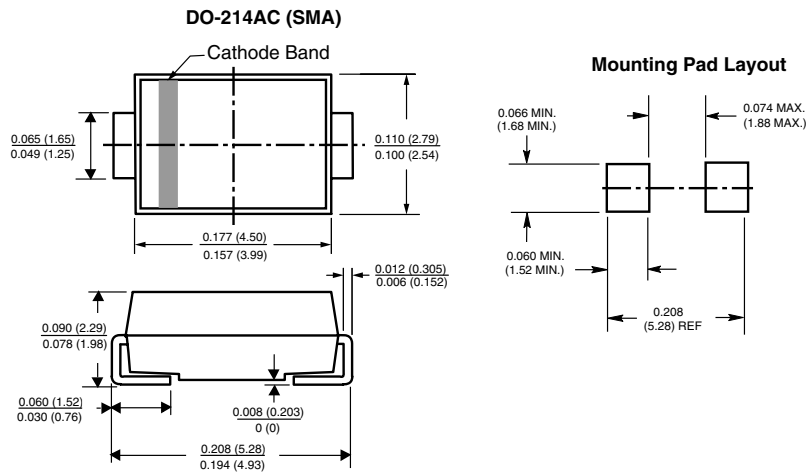

Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.