


PCIE-064-02-F-D-RA



PCIE-036-02-F-D-TH

PCI EXPRESS® CARD SOCKETS

SPECIFICATIONS

For complete specifications and recommended PCB layouts see www.samtec.com?PCIE

Insulator Material:

Black Nylon

Contact:

Phosphor Bronze

Plating:

Au or Sn over

50µ" (1,27µm) Ni

Current Rating:

2.5A @ 80°C ambient

Operating Temp:

-55°C to +125°C

Card Insertion Depth:

(8,00mm) .315" nominal

RoHS Compliant:

Yes

Lead-Free Solderable:

Wave only



Mates with:
(1,60mm) .062" card



Polarized
Supports one, four, eight and sixteen PCI Express® links

Choice of card-edge mount or PCB mount

(1,00mm) .03937" pitch

Accepts 1,6mm card

Alignment pins

Four rows on 2mm pitch


PCIE	Rated @ 3dB Insertion Loss
11,1mm Stack Height	
Differential Pair Signaling	7.0 GHz / 14 Gbps
Performance data for other stack heights and complete test data available at www.samtec.com?PCIE or contact sig@samtec.com	

APPLICATION SPECIFIC OPTION

Other plating options available. Call Samtec.

ALSO AVAILABLE

PCI Express® Jumpers & Extenders call for PCIEC Series



- Loop back Extender (From one PCIe® slot to another PCIe® slot)
 - Ser-Des Physical Extender (From one PCIe® slot to another PCIe® Ser-Des)
 - Physical Extender for easy troubleshooting of PCIe® card debug and analysis (PCIe® slot to Emulator or Analyzer)
- Call Samtec.

PCI Express® is a registered trademark of PCI-SIG

Note: Some lengths, styles and options are non-standard, non-returnable.

PCIE

NO. OF POSITIONS

02

PLATING OPTION

D

TAIL OPTION

-036, -064, -098, -164

-F

= Gold flash on contact, Tin on tail

-EMS2


= Edge Mount

-TH

= Through-hole

-RA

= Right Angle

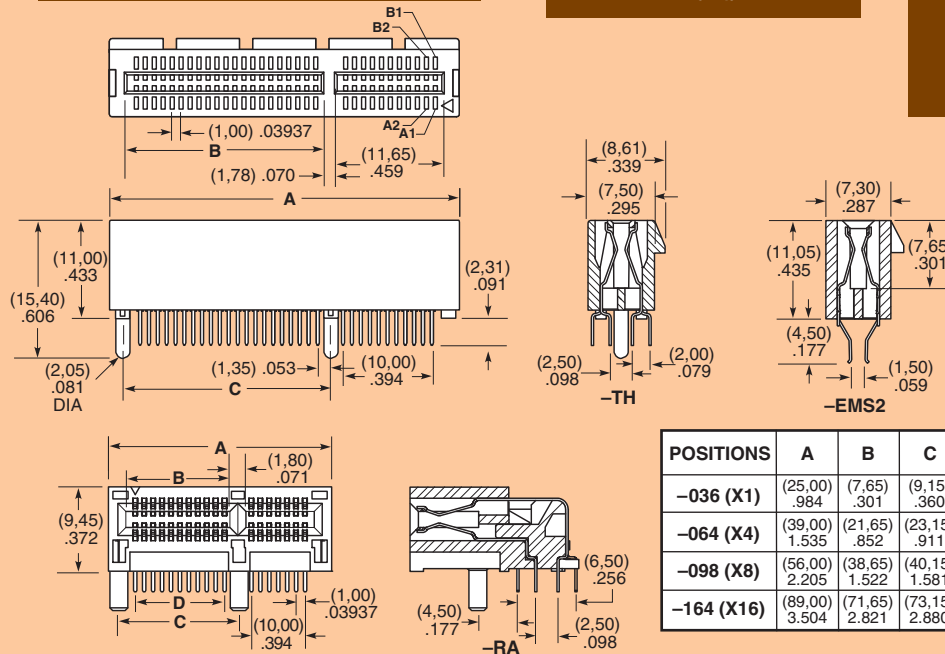

POSITIONS	A	B	C	D
-036 (X1)	(25,00) .984	(7,65) .301	(9,15) .360	(6,00) .236
-064 (X4)	(39,00) 1.535	(21,65) .852	(23,15) .911	(20,00) .787
-098 (X8)	(56,00) 2.205	(38,65) 1.522	(40,15) 1.581	(37,00) 1.457
-164 (X16)	(89,00) 3.504	(71,65) 2.821	(73,15) 2.880	(70,00) 2.756

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

SAMTEC USA • Tel: 1-800-SAMTEC-9 or 812-944-6733 SAMTEC SILICON VALLEY • Tel: 408-395-5900 SAMTEC SOUTHERN CALIFORNIA • Tel: 1-800-726-8329
SAMTEC AMERICA LATINA COMERCIO EXTERIOR LTDA • Tel: (+55 31) 3786 3227 SAMTEC UNITED KINGDOM • Tel: 44 01236 739292 SAMTEC GERMANY • Tel: +49 (0) 89 / 89460-0
SAMTEC FRANCE • Tel: 33 01 60 95 06 60 SAMTEC ITALY • Tel: 39 039 6890337 SAMTEC NORDIC/BALTIC • Tel: +46-84477280 SAMTEC BENELUX • Tel: 44 01236 739292

SAMTEC ISRAEL • Tel: 972-3-7526600 SAMTEC INDIA • Tel: +91-80-3272 1612 SAMTEC ASIA PACIFIC • Tel: 65 6745-5955 SAMTEC JAPAN • Tel: 045-475-1385 SAMTEC CHINA • Tel: 86-21-6083 3766
Downloaded from Elcodis.com electronics SAMTEC TAIWAN • Tel: 886-2-2709-6109 SAMTEC HONG KONG • Tel: 852-26904858 SAMTEC KOREA • Tel: 82-31-717-5685 SAMTEC ANZ • Tel: 613 9580 0683