






Push-Wire Connectors for Junction Boxes




<p>3 x 0.75 – 1.5 mm² "s" ① 5 x 0.75 – 1.5 mm² "s" ① 400 V / 4 kV / 2** 18 A</p> <p>3 x AWG 18 – 16 "sol." 5 x AWG 18 – 16 "sol." 600 V, 10 A ② 600 V, 10 A ③</p> <p>10 – 13 mm / 0.45 in</p> <p>* ① VDE ② KEM ③ CCA ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿</p>	<p>8 x 0.75 – 1.5 mm² "s" ① 400 V / 4 kV / 2** 18 A</p> <p>8 x AWG 18 – 16 "sol." 600 V, 20 A ② 600 V, 20 A ③</p> <p>10 – 13 mm / 0.45 in</p> <p>* ① VDE ② KEM ③ CCA ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿</p>	<p>2 x 1 – 2.5 mm² "s" ② 3 x 1 – 2.5 mm² "s" ② 400 V / 4 kV / 2** 24 A</p> <p>2 x AWG 18 – 12 "sol." 3 x AWG 18 – 12 "sol." 600 V, 20 A ③ 600 V, 20 A ④</p> <p>10 – 13 mm / 0.45 in</p> <p>* ① VDE ② KEM ③ CCA ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿</p>
--	---	--

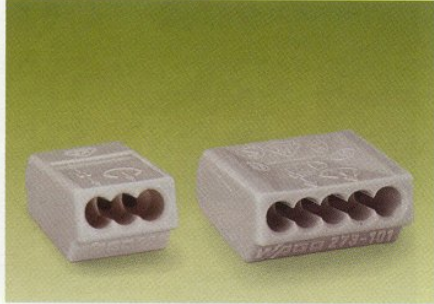




Color	Item-No.	Item-No.	Pack.-unit pcs	Color	Item-No.	Pack.-unit pcs	Color	Item-No.	Item-No.	Pack.-unit pcs	
Push-wire connectors for junction boxes, 3-cond. con. 5-cond. con.				Push-wire connectors for junction boxes, 8-conductor connectors				Push-wire connectors for junction boxes, 2-cond. con. 3-cond. con.			
grey	273-100	273-101	1000 (10 x 100)	grey	273-108	500 (10 x 50)	dark grey	273-112	273-104	1000 (10 x 100)	
transparent	-	273-155	1000 (10 x 100)	transparent	273-158	500 (10 x 50)	transparent	273-252	273-253	1000 (10 x 100)	

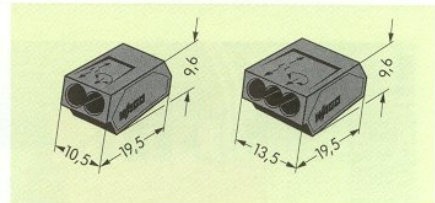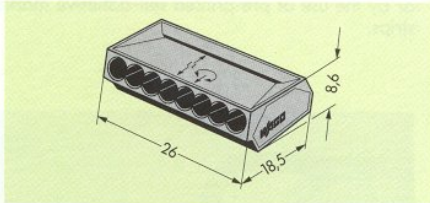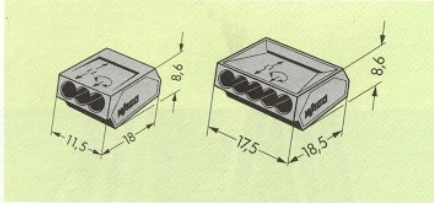

<p>4 x 1 – 2.5 mm² "s" ② 5 x 1 – 2.5 mm² "s" ② 400 V / 4 kV / 2** 24 A</p> <p>4 x AWG 18 – 12 "sol." 5 x AWG 18 – 12 "sol." 600 V, 20 A ③ 600 V, 20 A ④</p> <p>10 – 13 mm / 0.45 in</p> <p>* ① VDE ② KEM ③ CCA ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿</p>	<p>8 x 1 – 2.5 mm² "s" ② 400 V / 4 kV / 2** 24 A</p> <p>8 x AWG 18 – 14 "sol." 600 V, 20 A ③ 600 V, 20 A ④</p> <p>10 – 13 mm / 0.45 in</p> <p>* ① VDE ② KEM ③ CCA ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿</p>	<p>3 x 1.5 – 4 mm² "s" 400 V / 4 kV / 2** 32 A</p> <p>3 x AWG 14 – 10 "sol." 600 V, 30 A ③ 600 V, 30 A ④</p> <p>12 – 15 mm / 0.53 in</p> <p>* ① VDE ② KEM ③ CCA ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿</p>
--	--	--

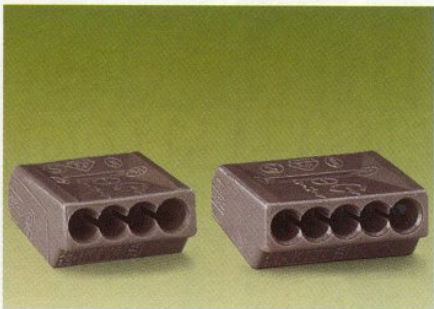

Color	Item-No.	Item-No.	Color	Item-No.	Item-No.	Color	Item-No.	Item-No.
Push-wire connectors for junction boxes, 4-cond. connectors 5-cond. connectors			Push-wire connectors for junction boxes, 8-conductor connectors			Push-wire connectors for junction boxes, 3-conductor connectors		
dark grey	273-102 ③	273-105 ③	dark grey	773-208 ④	273-103 ④	grey	273-403	500 (10 x 50)
transparent	273-254 ③	273-255 ④	transparent	-	273-258 ④	transparent	273-453	500 (10 x 50)
Pack.-unit ③ 1000 (10 x 100) ④ 500 (10 x 50)			Pack.-unit ④ 500 (10 x 50)					

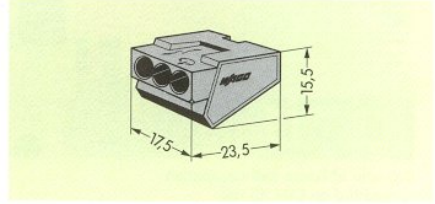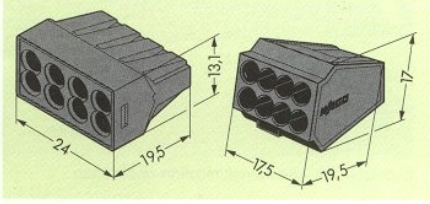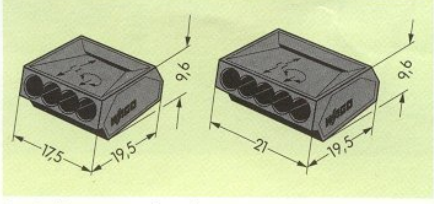

* For further approvals with corresponding ratings see pages 10.3 ff.
 ** in grounded (earthed) supply systems When using wires of the same diameter only, ① 0.5 mm²/AWG 20 or ② 0.75 mm²/AWG 18 are also possible.