D Panasonic Electronic Components

NEW! PAN1323 SERIES *BLUETOOTH*[®] TRIPLE MODE RF MODULES

Three Standards, One Small Module!

One highly flexible RF Module, three popular standards: Bluetooth Classic, Bluetooth Low Energy and ANT[™]. Panasonic introduces the **NEW PAN1323 Series Triple Mode RF Module** with embedded antenna. The **PAN1323 Series** provides easily integrated Bluetooth Version 4.0 and ANT connectivity into new and current designs by removing RF design and certification barriers from the development of the application. **Gain unprecedented access using this three mode gateway module that can connect 14 Million ANT nodes to over 3 Billion Bluetooth nodes.** Use Bluetooth EDR to manage large data requirements while taking advantage of extraordinary battery life using ultra lower network technology found in Bluetooth Low Energy and ANT for small data loads.

Designers can reduce the size and cost of applications using Panasonic's unique, tiny footprint technology. Just 85.5 mm², this family of modules are designed to accommodate PCBs with pad pitch of 1.3mm with as little as two layers for easy implementation and manufacturing. **PAN1323 Series** Modules have a Bluetooth subsystem, FCC, CE, (ETSI) and IC certifications.



The NEW **PAN1323 Series** is based upon Texas Instrument's CC256x integrated circuits and uses a host controlled interface (HCI), a cost effective and flexible means to implement a Bluetooth network. HCI reduces BOM cost by eliminating redundant processing capacity and giving designers the flexibility to work with a controller of their choosing, as the stacks reside and execute on the application's host processor. The **PAN1323 Series** is pad compatible with Panasonic's PAN1325A, PAN1326 and PAN1327 Series. A single PCB layout allows the flexibility of different protocol functionality implemented with only firmware.

Product Performance:

- A Single Module for Three Standards: Bluetooth Classic, Bluetooth Low Energy and ANT™.
 - o Bluetooth Version 4.0
 - o ANT[™] is a wireless sensor network protocol designed for ultra-low power applications
 - o Bluetooth Low Energy average power consumption is about 1 uA.
- Cost Effective and Flexible HCI Interface
- Extraordinary Range with10 dbm of Tx Power

- Easily Integrates to Texas Instruments' MSP430 and Stellaris ARM7 Controllers
- Small Footprint: 9mm x 9.5mm x 1.8mm
- Fully Certified, Bluetooth v4.0, FCC, CE and IC
- Complete Development Environment
- 100% Footprint Compatible with PAN13xx Series
- Optional Industrial Temperature Rating -40°C to +85 °C
- Supports All Bluetooth Profiles
- Compatible with 14 Million Deployed ANT Nodes

PAN1323 Part Numbers:

Part Numbers	Description		
ENW-89842A2JF	Bluetooth, PAN1323, Triple Mode with Antenna		
EVAL_PAN1323	Bluetooth, PAN1323, Eval Kit, Includes MSP430 Experimenter Board		
EVAL_PAN1323ETU	Bluetooth, PAN1323, Development Module	1 the second sec	

The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic Corporation of North America is under license. Other trademarks and trade names are those of their respective owners.



Website: www.panasonic.com/rfmodules industrial@us.panasonic.com 1-800-344-2112 Downloaded from <u>Elcodis.com</u> electronic components distributor Copyright © 2012 Panasonic Corporation of North America. All Rights Reserved. Specifications are subject to change without notice. PAN1323 NPI, FY12-063-XXX

D Panasonic Electronic Components

New Product Introduction

Applications:

· Health and Wellness

-Thermometer

Sports and Fitness

-Cadence -Power Meter -Pedometer

Home Automation

 Flood Alarm
 Lighting Control
 HVAC Monitoring

Industrial SensorsMobile Accessories

· Gateways

Irrigation

and Control


-Heart Rate Monitor

-Fitness Equipment

-Bicycle Computer


-Blood Pressure Sensor -Blood Glucose Monitor

Block Diagram PAN1323:

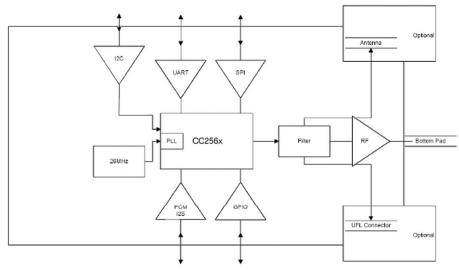

Evaluation Kits:

EVAL_PAN1323



EVAL_PAN1323_ETU



Technical Specifications for PAN1323:

Parameter	Value	Condition / Notes
Receiver Sensitivity (BER=10 ⁻³)	-93 dBm	GFSK, Typical, Dirty TX On
Output Power	10 dBm	VDD_In = VBAT
Power Supply	1.7 - 4.8 V	Battery of DC/DC
Ultra Low Power Scan	135 uA	1.28s Interval
GFSK DH1\DH5	33 mA	Full Throughput
Operating Temperature Range	-20°C to + 70°C	-40°C to + 85°C (Optional, Upon Request)

The Bluetooth[®] word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by Panasonic Corporation of North America is under license. Other trademarks and trade names are those of their respective owners.



Website: www.panasonic.com/rfmodules industrial@us.panasonic.com 1-800-344-2112 Downloaded from Elcodis.com electronic components distributor Copyright © 2012 Panasonic Corporation of North America. All Rights Reserved. Specifications are subject to change without notice. PAN1323 NPI, FY12-63-XXX