



## ispLSI<sup>®</sup> 1032 Device Datasheet

---

September 2010

# All Devices Discontinued!

Product Change Notifications (PCNs) have been issued to discontinue all devices in this data sheet.


The original datasheet pages have not been modified and do not reflect those changes. Please refer to the table below for reference PCN and current product status.

| Product Line | Ordering Part Number                    | Product Status | Reference PCN              |
|--------------|---|----------------|----------------------------|
| ispLSI 1032  | ispLSI 1032-60LT                        | Discontinued   | <a href="#">PCN#13-10</a>  |
|              | ispLSI 1032-80LT                        |                |                            |
|              | ispLSI 1032-90LT                        |                |                            |
|              | ispLSI 1032-60LTI                       |                |                            |
|              | ispLSI 1032-60LJ                        |                |                            |
|              | ispLSI 1032-80LJ                        |                |                            |
|              | ispLSI 1032-90LJ                        |                |                            |
|              | ispLSI 1032-60LJI                       |                |                            |
|              | ispLSI 1016-60LH/883<br>5962-9476201MXC |                | <a href="#">PCN#05A-10</a> |

## Features

- **HIGH-DENSITY PROGRAMMABLE LOGIC**
  - High Speed Global Interconnect
  - 6000 PLD Gates
  - 64 I/O Pins, Eight Dedicated Inputs
  - 192 Registers
  - Wide Input Gating for Fast Counters, State Machines, Address Decoders, etc.
  - Small Logic Block Size for Fast Random Logic
  - Security Cell Prevents Unauthorized Copying
- **HIGH PERFORMANCE E<sup>2</sup>CMOS<sup>®</sup> TECHNOLOGY**
  - $f_{max} = 90$  MHz Maximum Operating Frequency
  - $f_{max} = 60$  MHz for Industrial and Military/883 Devices
  - $t_{pd} = 12$  ns Propagation Delay
  - TTL Compatible Inputs and Outputs
  - Electrically Erasable and Reprogrammable
  - Non-Volatile E<sup>2</sup>CMOS Technology
  - 100% Tested
- **IN-SYSTEM PROGRAMMABLE**
  - In-System Programmable™ (ISP™) 5-Volt Only
  - Increased Manufacturing Yields, Reduced Time-to-Market, and Improved Product Quality
  - Reprogram Soldered Devices for Faster Prototyping
- **COMBINES EASE OF USE AND THE FAST SYSTEM SPEED OF PLDs WITH THE DENSITY AND FLEXIBILITY OF FIELD PROGRAMMABLE GATE ARRAYS**
  - Complete Programmable Device Can Combine Glue Logic and Structured Designs
  - Four Dedicated Clock Input Pins
  - Synchronous and Asynchronous Clocks
  - Flexible Pin Placement
  - Optimized Global Routing Pool Provides Global Interconnectivity

## Functional Block Diagram

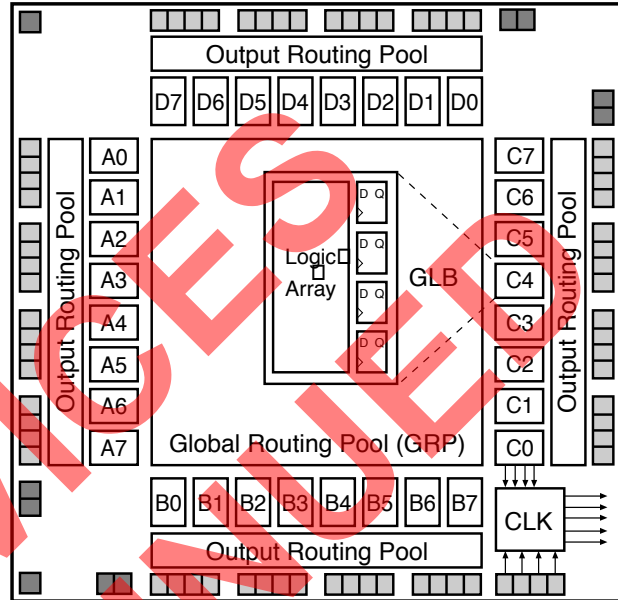


## Description

The ispLSI 1032 is a High-Density Programmable Logic Device containing 192 Registers, 64 Universal I/O pins, eight Dedicated Input pins, four Dedicated Clock Input pins and a Global Routing Pool (GRP). The GRP provides complete interconnectivity between all of these elements. The ispLSI 1032 features 5-Volt in-system programming and in-system diagnostic capabilities. It is the first device which offers non-volatile reprogrammability of the logic, as well as the interconnect to provide truly reconfigurable systems.

The basic unit of logic on the ispLSI 1032 device is the Generic Logic Block (GLB). The GLBs are labeled A0, A1 .. D7 (see figure 1). There are a total of 32 GLBs in the ispLSI 1032 device. Each GLB has 18 inputs, a programmable AND/OR/XOR array, and four outputs which can be configured to be either combinatorial or registered. Inputs to the GLB come from the GRP and dedicated inputs. All of the GLB outputs are brought back into the GRP so that they can be connected to the inputs of any other GLB on the device.

Functional Block Diagram

Figure 1. ispLSI 1032 Functional Block Diagram

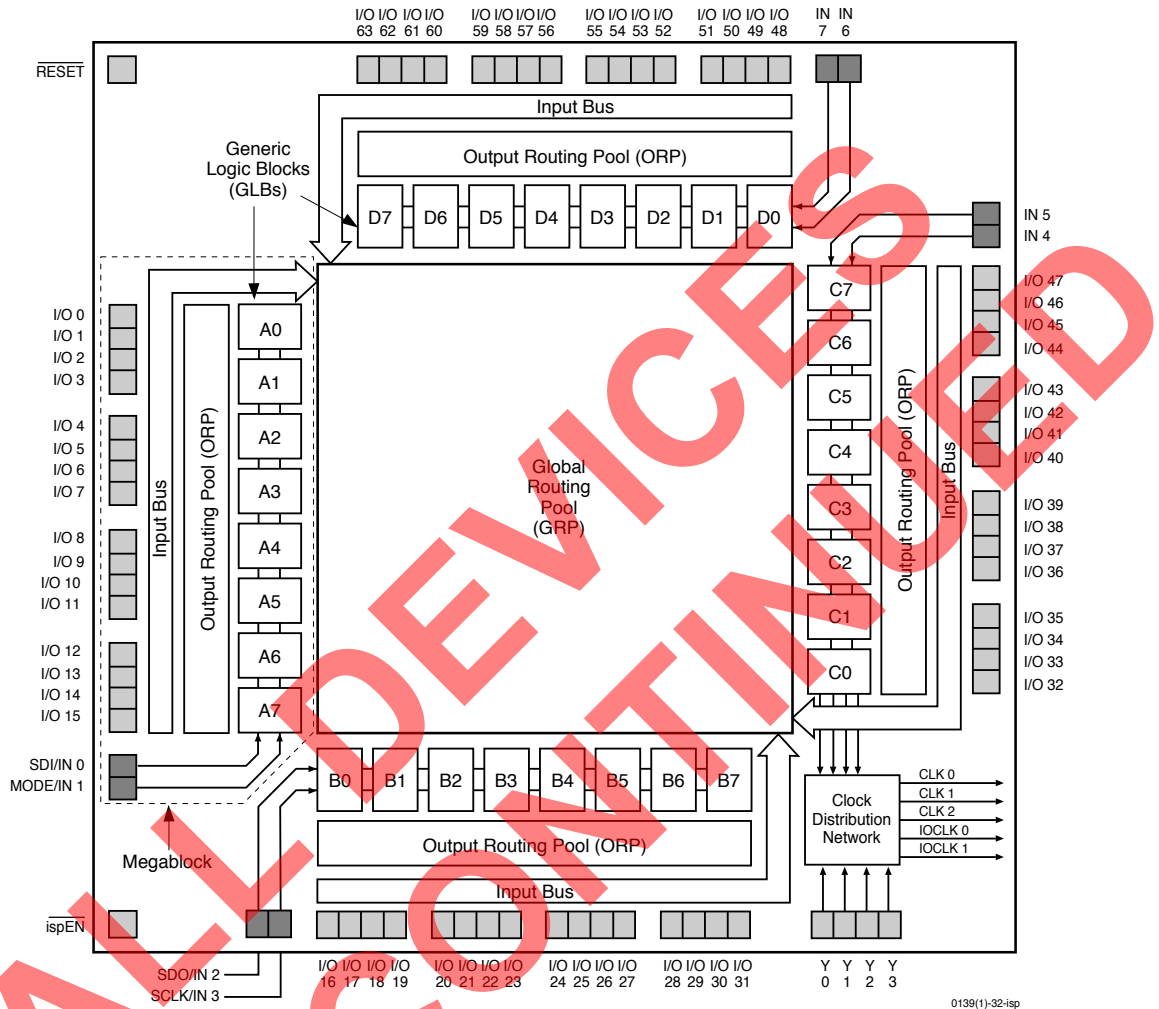

The device also has 64 I/O cells, each of which is directly connected to an I/O pin. Each I/O cell can be individually programmed to be a combinatorial input, registered input, latched input, output or bi-directional I/O pin with 3-state control. Additionally, all outputs are polarity selectable, active high or active low. The signal levels are TTL compatible voltages and the output drivers can source 4 mA or sink 8 mA.

Eight GLBs, 16 I/O cells, two dedicated inputs and one ORP are connected together to make a Megablock (see figure 1). The outputs of the eight GLBs are connected to a set of 16 universal I/O cells by the ORP. The I/O cells within the Megablock also share a common Output Enable (OE) signal. The ispLSI 1032 device contains four of these Megablocks.

The GRP has as its inputs the outputs from all of the GLBs and all of the inputs from the bi-directional I/O cells. All of these signals are made available to the inputs of the GLBs. Delays through the GRP have been equalized to minimize timing skew.

Clocks in the ispLSI 1032 device are selected using the Clock Distribution Network. Four dedicated clock pins (Y0, Y1, Y2 and Y3) are brought into the distribution network, and five clock outputs (CLK 0, CLK 1, CLK 2, IOCLK 0 and IOCLK 1) are provided to route clocks to the GLBs and I/O cells. The Clock Distribution Network can also be driven from a special clock GLB (C0 on the ispLSI 1032 device). The logic of this GLB allows the user to create an internal clock from a combination of internal signals within the device.

**Absolute Maximum Ratings** <sup>1</sup>

Supply Voltage  $V_{CC}$  ..... -0.5 to +7.0V  
 Input Voltage Applied ..... -2.5 to  $V_{CC} + 1.0V$   
 Off-State Output Voltage Applied ..... -2.5 to  $V_{CC} + 1.0V$   
 Storage Temperature ..... -65 to 150°C  
 Case Temp. with Power Applied ..... -55 to 125°C  
 Max. Junction Temp. ( $T_J$ ) with Power Applied ... 150°C

1. Stresses above those listed under the “Absolute Maximum Ratings” may cause permanent damage to the device. Functional operation of the device at these or at any other conditions above those indicated in the operational sections of this specification is not implied (while programming, follow the programming specifications).

**DC Recommended Operating Conditions**

| SYMBOL   | PARAMETER          | MIN.  | MAX.         | UNITS |   |
|----------|--------------------|---|--------------|-------|---|
| $V_{CC}$ | Supply Voltage     | Commercial $T_A = 0^\circ\text{C to } +70^\circ\text{C}$      | 4.75         | 5.25  | V |
|          |                    | Industrial $T_A = -40^\circ\text{C to } +85^\circ\text{C}$    | 4.5          | 5.5   |   |
|          |                    | Military/883 $T_C = -55^\circ\text{C to } +125^\circ\text{C}$ | 4.5          | 5.5   |   |
| $V_{IL}$ | Input Low Voltage  | 0   | 0.8          | V     |   |
| $V_{IH}$ | Input High Voltage | 2.0   | $V_{CC} + 1$ | V     |   |

Table 2- 0005Aisp w/mil.eps

**Capacitance ( $T_A=25^\circ\text{C}$ ,  $f=1.0$  MHz)**

| SYMBOL | PARAMETER                   | □ MAXIMUM             | UNITS | TEST CONDITIONS                 |                            |
|--------|-----------------------------|-----------------------|-------|---------------------------------|----------------------------|
| $C_1$  | Dedicated Input Capacitance | Commercial/Industrial | 8     | pf                              | $V_{CC}=5.0V, V_{IN}=2.0V$ |
|        |                             | Military              | 10    | pf                              | $V_{CC}=5.0V, V_{IN}=2.0V$ |
| $C_2$  | I/O and Clock Capacitance   | 10                    | pf    | $V_{CC}=5.0V, V_{IO}, V_Y=2.0V$ |                            |

1. Guaranteed but not 100% tested.

Table 2- 0006

**Data Retention Specifications**

| PARAMETER              | MINIMUM | MAXIMUM | UNITS  |
|------------------------|---------|---------|--------|
| Data Retention         | 20      | —       | Years  |
| Erase/Reprogram Cycles | 10000   | —       | Cycles |

Table 2- 0008B


**Switching Test Conditions**

|                                |                  |
|--------------------------------|------------------|
| Input Pulse Levels             | GND to 3.0V      |
| Input Rise and Fall Time       | ≤ 3ns 10% to 90% |
| Input Timing Reference Levels  | 1.5V             |
| Output Timing Reference Levels | 1.5V             |
| Output Load                    | See figure 2     |

3-state levels are measured 0.5V from steady-state active level.

Table 2- 0003

**Figure 2. Test Load**

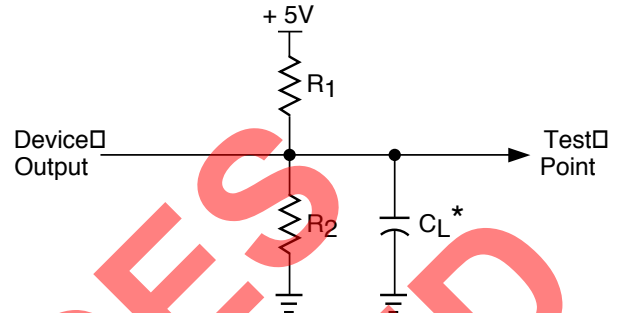

\*  $C_L$  includes Test Fixture and Probe Capacitance.

**Output Load Conditions (see figure 2)**

| Test Condition | R1                                  | R2   | CL   |
|----------------|-------------------------------------|------|------|
| A              | 470Ω                                | 390Ω | 35pF |
| B              | Active High                         | ∞    | 390Ω |
|                | Active Low                          | 470Ω | 390Ω |
| C              | Active High to Z at $V_{OH} - 0.5V$ | ∞    | 390Ω |
|                | Active Low to Z at $V_{OL} + 0.5V$  | 470Ω | 390Ω |

**DC Electrical Characteristics**

**Over Recommended Operating Conditions**

| SYMBOL                   | PARAMETER                         | CONDITION                                   | MIN.                | TYP. <sup>3</sup> | MAX. | UNITS |    |
|--------------------------|-----------------------------------|---|---------------------|-------------------|------|-------|----|
| <b>VOL</b>               | Output Low Voltage                | $I_{OL} = 8 \text{ mA}$                     | –                   | –                 | 0.4  | V     |    |
| <b>VOH</b>               | Output High Voltage               | $I_{OH} = -4 \text{ mA}$                    | 2.4                 | –                 | –    | V     |    |
| <b>IIL</b>               | Input or I/O Low Leakage Current  | $0V \leq V_{IN} \leq V_{IL} \text{ (MAX.)}$ | –                   | –                 | -10  | μA    |    |
| <b>IIH</b>               | Input or I/O High Leakage Current | $3.5V \leq V_{IN} \leq V_{CC}$              | –                   | –                 | 10   | μA    |    |
| <b>IIL-isp</b>           | isp Input Low Leakage Current     | $0V \leq V_{IN} \leq V_{IL} \text{ (MAX.)}$ | –                   | –                 | -150 | μA    |    |
| <b>IIL-PU</b>            | I/O Active Pull-Up Current        | $0V \leq V_{IN} \leq V_{IL}$                | –                   | –                 | -150 | μA    |    |
| <b>IOS1</b>              | Output Short Circuit Current      | $V_{CC} = 5V, V_{OUT} = 0.5V$               | –                   | –                 | -200 | mA    |    |
| <b>ICC<sup>2,4</sup></b> | Operating Power Supply Current    | $V_{IL} = 0.5V, V_{IH} = 3.0V$              | Commercial          | –                 | 130  | 190   | mA |
|                          |                                   | $f_{TOGGLE} = 1 \text{ MHz}$                | Industrial/Military | –                 | 135  | 220   | mA |

Table 2- 0007A-32-isp

1. One output at a time for a maximum duration of one second.
2. Measured using eight 16-bit counters.
3. Typical values are at  $V_{CC} = 5V$  and  $T_A = 25^\circ C$ .
4. Maximum  $I_{CC}$  varies widely with specific device configuration and operating frequency. Refer to the Power Consumption section of this datasheet and Thermal Management section of the Lattice Semiconductor Data Book or CD-ROM to estimate maximum  $I_{CC}$ .

External Timing Parameters

Over Recommended Operating Conditions

| PARAMETER               | TEST <sup>5</sup><br>COND. | # <sup>2</sup> | DESCRIPTION <sup>1</sup>   | -90  |      | -80  |      | -60  |      | UNITS |
|-------------------------|----------------------------|----------------|--|------|------|------|------|------|------|-------|
|                         |                            |                |  | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |       |
| t <sub>pd1</sub>        | A                          | 1              | Data Propagation Delay, 4PT bypass, ORP bypass   | -□   | 12   | -□   | 15   | -□   | 20   | ns    |
| t <sub>pd2</sub>        | A                          | 2              | Data Propagation Delay, Worst Case Path  | -□   | 17   | -□   | 20   | -□   | 25   | ns    |
| f <sub>max</sub> (Int.) | A                          | 3              | Clock Frequency with Internal Feedback <sup>3</sup>                                    | 90.9 | -□   | 80   | -□   | 60   | -□   | MHz   |
| f <sub>max</sub> (Ext.) | -□                         | 4              | Clock Frequency with External Feedback <sup>3</sup><br>$\frac{1}{(t_{su2} + t_{co1})}$ | 58.8 | -□   | 50   | -□   | 38   | -□   | MHz   |
| f <sub>max</sub> (Tog.) | -□                         | 5              | Clock Frequency, Max Toggle <sup>4</sup>   | 125  | -□   | 100  | -□   | 83   | -□   | MHz   |
| t <sub>su1</sub>        | -□                         | 6              | GLB Reg. Setup Time before Clock, 4PT bypass□  | 6    | -□   | 7    | -□   | 9    | -□   | ns    |
| t <sub>co1</sub>        | A                          | 7              | GLB Reg. Clock to Output Delay, ORP bypass   | -□   | 8    | -□   | 10   | -□   | 13   | ns    |
| t <sub>h1</sub>         | -□                         | 8              | GLB Reg. Hold Time after Clock, 4 PT bypass  | 0    | -□   | 0    | -□   | 0    | -□   | ns    |
| t <sub>su2</sub>        | -□                         | 9              | GLB Reg. Setup Time before Clock□  | 9    | -□   | 10   | -□   | 13   | -□   | ns    |
| t <sub>co2</sub>        | -□                         | 10             | GLB Reg. Clock to Output Delay   | -□   | 10   | -□   | 12   | -□   | 16   | ns    |
| t <sub>h2</sub>         | -□                         | 11             | GLB Reg. Hold Time after Clock   | 0    | -□   | 0    | -□   | 0    | -□   | ns    |
| t <sub>r1</sub>         | A                          | 12             | Ext. Reset Pin to Output Delay   | -□   | 15   | -□   | 17   | -□   | 22.5 | ns    |
| t <sub>rw1</sub>        | -□                         | 13             | Ext. Reset Pulse Duration  | 10   | -□   | 10   | -□   | 13   | -□   | ns    |
| t <sub>en</sub>         | B                          | 14             | Input to Output Enable   | -□   | 15   | -□   | 18   | -□   | 24   | ns    |
| t <sub>dis</sub>        | C                          | 15             | Input to Output Disable  | -□   | 15   | -□   | 18   | -□   | 24   | ns    |
| t <sub>wh</sub>         | -□                         | 16             | Ext. Sync. Clock Pulse Duration, High  | 4    | -□   | 5    | -□   | 6    | -□   | ns    |
| t <sub>wl</sub>         | -□                         | 17             | Ext. Sync. Clock Pulse Duration, Low   | 4    | -□   | 5    | -□   | 6    | -□   | ns    |
| t <sub>su5</sub>        | -□                         | 18             | I/O Reg. Setup Time before Ext. Sync. Clock (Y2, Y3)                                   | 2    | -□   | 2    | -□   | 2.5  | -□   | ns    |
| t <sub>h5</sub>         | -□                         | 19             | I/O Reg. Hold Time after Ext. Sync. Clock (Y2, Y3)                                     | 6.5  | -□   | 6.5  | -□   | 8.5  | -□   | ns    |

1. Unless noted otherwise, all parameters use a GRP load of 4 GLBs, 20 PTXOR path, ORP and Y0 clock.
2. Refer to Timing Model in this data sheet for further details.□
3. Standard 16-Bit counter using GRP feedback.□
4. f<sub>max</sub> (Toggle) may be less than 1/(t<sub>wh</sub> + t<sub>wl</sub>). This is to allow for a clock duty cycle of other than 50%.
5. Reference Switching Test Conditions section.

Table 2-0030-32/90,80,60C

**Internal Timing Parameters<sup>1</sup>**

| PARAMETER            | # <sup>2</sup> | DESCRIPTION                                      | -90  |      | -80  |      | -60  |      | UNITS |
|----------------------|----------------|--|------|------|------|------|------|------|-------|
|                      |                |  | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |       |
| <b>Inputs</b>        |                |  |      |      |      |      |      |      |       |
| t <sub>iobp</sub>    | 20             | I/O Register Bypass                              | –    | 1.6  | –    | 2.0  | –    | 2.7  | ns    |
| t <sub>iolat</sub>   | 21             | I/O Latch Delay                                  | –    | 2.4  | –    | 3.0  | –    | 4.0  | ns    |
| t <sub>iosu</sub>    | 22             | I/O Register Setup Time before Clock             | 4.8  | –    | 5.5  | –    | 7.3  | –    | ns    |
| t <sub>ioh</sub>     | 23             | I/O Register Hold Time after Clock               | 2.1  | –    | 1.0  | –    | 1.3  | –    | ns    |
| t <sub>ioco</sub>    | 24             | I/O Register Clock to Out Delay                  | –    | 2.4  | –    | 3.0  | –    | 4.0  | ns    |
| t <sub>ior</sub>     | 25             | I/O Register Reset to Out Delay                  | –    | 2.8  | –    | 2.5  | –    | 3.3  | ns    |
| t <sub>din</sub>     | 26             | Dedicated Input Delay                            | –    | 3.2  | –    | 4.0  | –    | 5.3  | ns    |
| <b>GRP</b>           |                |  |      |      |      |      |      |      |       |
| t <sub>grp1</sub>    | 27             | GRP Delay, 1 GLB Load                            | –    | 1.2  | –    | 1.5  | –    | 2.0  | ns    |
| t <sub>grp4</sub>    | 28             | GRP Delay, 4 GLB Loads                           | –    | 1.6  | –    | 2.0  | –    | 2.7  | ns    |
| t <sub>grp8</sub>    | 29             | GRP Delay, 8 GLB Loads                           | –    | 2.4  | –    | 3.0  | –    | 4.0  | ns    |
| t <sub>grp12</sub>   | 30             | GRP Delay, 12 GLB Loads                          | –    | 3.0  | –    | 3.8  | –    | 5.0  | ns    |
| t <sub>grp16</sub>   | 31             | GRP Delay, 16 GLB Loads                          | –    | 3.6  | –    | 4.5  | –    | 6.0  | ns    |
| t <sub>grp32</sub>   | 32             | GRP Delay, 32 GLB Loads                          | –    | 6.4  | –    | 8.0  | –    | 10.6 | ns    |
| <b>GLB</b>           |                |  |      |      |      |      |      |      |       |
| t <sub>4ptbp</sub>   | 33             | 4 Product Term Bypass Path Delay                 | –    | 5.2  | –    | 6.5  | –    | 8.6  | ns    |
| t <sub>1ptxor</sub>  | 34             | 1 Product Term/XOR Path Delay                    | –    | 5.7  | –    | 7.0  | –    | 9.3  | ns    |
| t <sub>20ptxor</sub> | 35             | 20 Product Term/XOR Path Delay                   | –    | 7.0  | –    | 8.0  | –    | 10.6 | ns    |
| t <sub>xoradj</sub>  | 36             | XOR Adjacent Path Delay <sup>3</sup>             | –    | 8.2  | –    | 9.5  | –    | 12.7 | ns    |
| t <sub>gbp</sub>     | 37             | GLB Register Bypass Delay                        | –    | 0.8  | –    | 1.0  | –    | 1.3  | ns    |
| t <sub>gsu</sub>     | 38             | GLB Register Setup Time before Clock             | 1.2  | –    | 1.0  | –    | 1.3  | –    | ns    |
| t <sub>gh</sub>      | 39             | GLB Register Hold Time after Clock               | 3.6  | –    | 4.5  | –    | 6.0  | –    | ns    |
| t <sub>gco</sub>     | 40             | GLB Register Clock to Output Delay               | –    | 1.6  | –    | 2.0  | –    | 2.7  | ns    |
| t <sub>gr</sub>      | 41             | GLB Register Reset to Output Delay               | –    | 2.0  | –    | 2.5  | –    | 3.3  | ns    |
| t <sub>ptre</sub>    | 42             | GLB Product Term Reset to Register Delay         | –    | 8.0  | –    | 10.0 | –    | 13.3 | ns    |
| t <sub>ptoe</sub>    | 43             | GLB Product Term Output Enable to I/O Cell Delay | –    | 7.8  | –    | 9.0  | –    | 12.0 | ns    |
| t <sub>ptck</sub>    | 44             | GLB Product Term Clock Delay                     | 2.8  | 6.0  | 3.5  | 7.5  | 4.6  | 9.9  | ns    |
| <b>ORP</b>           |                |  |      |      |      |      |      |      |       |
| t <sub>orp</sub>     | 45             | ORP Delay  | –    | 2.4  | –    | 2.5  | –    | 3.3  | ns    |
| t <sub>orpbp</sub>   | 46             | ORP Bypass Delay                                 | –    | 0.4  | –    | 0.5  | –    | 0.7  | ns    |

1. Internal Timing Parameters are not tested and are for reference only.
2. Refer to Timing Model in this data sheet for further details.
3. The XOR adjacent path can only be used by hard macros.

**Internal Timing Parameters<sup>1</sup>**


| PARAMETER                 | # <sup>2</sup> | DESCRIPTION   | -90  |      | -80  |      | -60  |      | UNITS |
|---------------------------|----------------|---|------|------|------|------|------|------|-------|
|                           |                |   | MIN. | MAX. | MIN. | MAX. | MIN. | MAX. |       |
| <b>Outputs</b>            |                |   |      |      |      |      |      |      |       |
| <b>t<sub>ob</sub></b>     | 47             | Output Buffer Delay                                   | –    | 2.4  | –    | 3.0  | –    | 4.0  | ns    |
| <b>t<sub>oen</sub></b>    | 48             | I/O Cell OE to Output Enabled                         | –    | 4.0  | –    | 5.0  | –    | 6.7  | ns    |
| <b>t<sub>odis</sub></b>   | 49             | I/O Cell OE to Output Disabled                        | –    | 4.0  | –    | 5.0  | –    | 6.7  | ns    |
| <b>Clocks</b>             |                |   |      |      |      |      |      |      |       |
| <b>t<sub>gy0</sub></b>    | 50             | Clock Delay, Y0 to Global GLB Clock Line (Ref. clock) | 3.6  | 3.6  | 4.5  | 4.5  | 6.0  | 6.0  | ns    |
| <b>t<sub>gy1/2</sub></b>  | 51             | Clock Delay, Y1 or Y2 to Global GLB Clock Line        | 2.8  | 4.4  | 3.5  | 5.5  | 4.6  | 7.3  | ns    |
| <b>t<sub>gcp</sub></b>    | 52             | Clock Delay, Clock GLB to Global GLB Clock Line       | 0.8  | 4.0  | 1.0  | 5.0  | 1.3  | 6.6  | ns    |
| <b>t<sub>ioy2/3</sub></b> | 53             | Clock Delay, Y2 or Y3 to I/O Cell Global Clock Line   | 2.8  | 4.4  | 3.5  | 5.5  | 4.6  | 7.3  | ns    |
| <b>t<sub>iocp</sub></b>   | 54             | Clock Delay, Clock GLB to I/O Cell Global Clock Line  | 0.8  | 4.0  | 1.0  | 5.0  | 1.3  | 6.6  | ns    |
| <b>Global Reset</b>       |                |   |      |      |      |      |      |      |       |
| <b>t<sub>gr</sub></b>     | 55             | Global Reset to GLB and I/O Registers                 | –    | 8.2  | –    | 9.0  | –    | 12.0 | ns    |

1. Internal Timing Parameters are not tested and are for reference only.
2. Refer to Timing Model in this data sheet for further details.

ALL DEVICES DISCONTINUED



ispLSI 1032 Timing Model

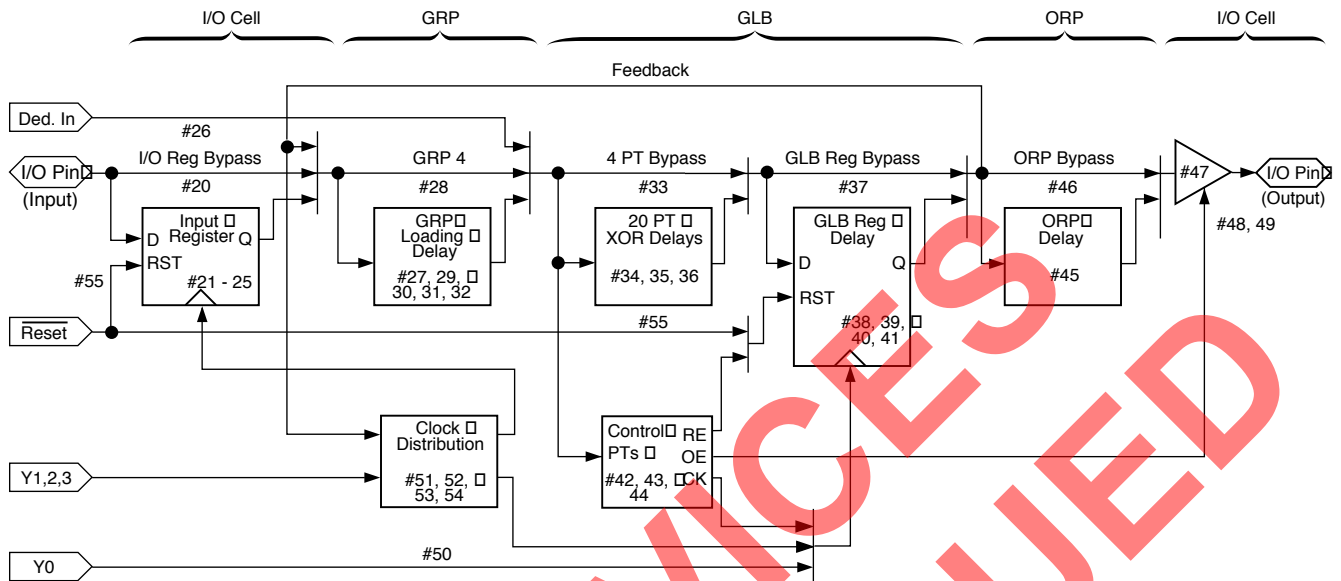

**Derivations of  $t_{su}$ ,  $t_h$  and  $t_{co}$  from the Product Term Clock<sup>1</sup>**


$$\begin{aligned}
 t_{su} &= \text{Logic} + \text{Reg } s_u - \text{Clock (min)} \\
 &= (t_{iobp} + t_{grp4} + t_{20ptxor}) + (t_{gsu}) - (t_{iobp} + t_{grp4} + t_{ptck(min)}) \\
 &= (\#20 + \#28 + \#35) + (\#38) - (\#20 + \#28 + \#44) \\
 5.5 \text{ ns} &= (2.0 + 2.0 + 8.0) + (1.0) - (2.0 + 2.0 + 3.5) \\
 t_h &= \text{Clock (max)} + \text{Reg } h - \text{Logic} \\
 &= (t_{iobp} + t_{grp4} + t_{ptck(max)}) + (t_{gh}) - (t_{iobp} + t_{grp4} + t_{20ptxor}) \\
 &= (\#20 + \#28 + \#44) + (\#39) - (\#20 + \#28 + \#35) \\
 4.0 \text{ ns} &= (2.0 + 2.0 + 7.5) + (4.5) - (2.0 + 2.0 + 8.0) \\
 t_{co} &= \text{Clock (max)} + \text{Reg } c_o + \text{Output} \\
 &= (t_{iobp} + t_{grp4} + t_{ptck(max)}) + (t_{gco}) + (t_{orp} + t_{ob}) \\
 &= (\#20 + \#28 + \#44) + (\#40) + (\#45 + \#47) \\
 19.0 \text{ ns} &= (2.0 + 2.0 + 7.5) + (2.0) + (2.5 + 3.0)
 \end{aligned}$$

**Derivations of  $t_{su}$ ,  $t_h$  and  $t_{co}$  from the Clock GLB<sup>1</sup>**

$$\begin{aligned}
 t_{su} &= \text{Logic} + \text{Reg } s_u - \text{Clock (min)} \\
 &= (t_{iobp} + t_{grp4} + t_{20ptxor}) + (t_{gsu}) - (t_{gy0(min)} + t_{gco} + t_{gcp(min)}) \\
 &= (\#20 + \#28 + \#35) + (\#38) - (\#50 + \#40 + \#52) \\
 5.5 \text{ ns} &= (2.0 + 2.0 + 8.0) + (1.0) - (4.5 + 2.0 + 1.0) \\
 t_h &= \text{Clock (max)} + \text{Reg } h - \text{Logic} \\
 &= (t_{gy0(max)} + t_{gco} + t_{gcp(max)}) + (t_{gh}) - (t_{iobp} + t_{grp4} + t_{20ptxor}) \\
 &= (\#50 + \#40 + \#52) + (\#39) - (\#20 + \#28 + \#35) \\
 4.0 \text{ ns} &= (4.5 + 2.0 + 5.0) + (4.5) - (2.0 + 2.0 + 8.0) \\
 t_{co} &= \text{Clock (max)} + \text{Reg } c_o + \text{Output} \\
 &= (t_{gy0(max)} + t_{gco} + t_{gcp(max)}) + (t_{gco}) + (t_{orp} + t_{ob}) \\
 &= (\#50 + \#40 + \#52) + (\#40) + (\#45 + \#47) \\
 19.0 \text{ ns} &= (4.5 + 2.0 + 5.0) + (2.0) + (2.5 + 3.0)
 \end{aligned}$$

1. Calculations are based upon timing specifications for the ispLSI 1032-80.


Maximum GRP Delay vs GLB Loads

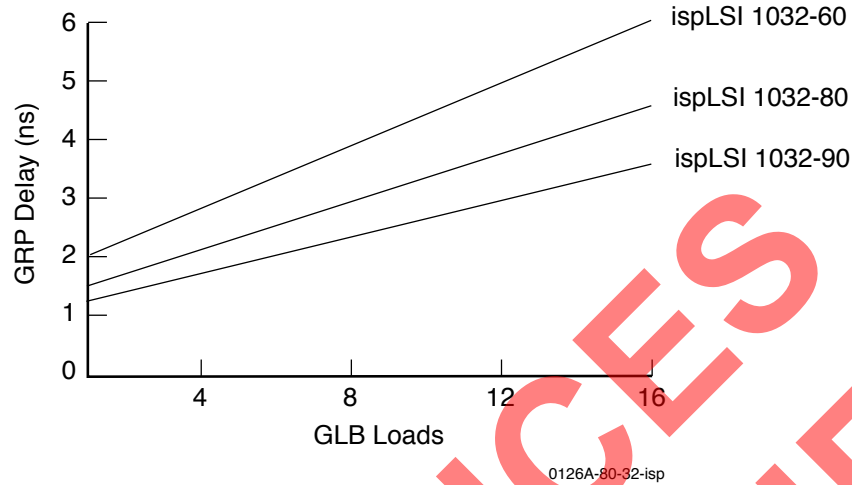

Power Consumption

Power consumption in the ispLSI 1032 device depends on two primary factors: the speed at which the device is operating, and the number of Product Terms used. Figure 3 shows the relationship between power and operating speed.

Figure 3. Typical Device Power Consumption vs fmax

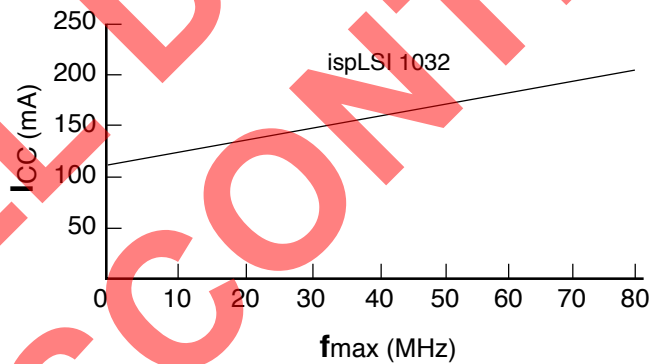

Notes: Configuration of eight 16-bit Counters  
Typical Current at 5V, 25°C

ICC can be estimated for the ispLSI 1032 using the following equation:

$$I_{CC} = 52 + (\# \text{ of PTs} * 0.30) + (\# \text{ of nets} * \text{Max. freq} * 0.009) \text{ where:}$$

# of PTs = Number of Product Terms used in design

# of nets = Number of Signals used in device

Max. freq = Highest Clock Frequency to the device

The ICC estimate is based on typical conditions (VCC = 5.0V, room temperature) and an assumption of 2 GLB loads on average exists. These values are for estimates only. Since the value of ICC is sensitive to operating conditions and the program in the device, the actual ICC should be verified.

0127A-32-80-isp

Pin Description

| Name  | PLCC Pin Numbers   | Description   |
|---|--|---|
| I/O 0 - I/O 3<br>I/O 4 - I/O 7<br>I/O 8 - I/O 11<br>I/O 12 - I/O 15<br>I/O 16 - I/O 19<br>I/O 20 - I/O 23<br>I/O 24 - I/O 27<br>I/O 28 - I/O 31<br>I/O 32 - I/O 35<br>I/O 36 - I/O 39<br>I/O 40 - I/O 43<br>I/O 44 - I/O 47<br>I/O 48 - I/O 51<br>I/O 52 - I/O 55<br>I/O 56 - I/O 59<br>I/O 60 - I/O 63 | 26, 27, 28, 29,<br>30, 31, 32, 33,<br>34, 35, 36, 37,<br>38, 39, 40, 41,<br>45, 46, 47, 48,<br>49, 50, 51, 52,<br>53, 54, 55, 56,<br>57, 58, 59, 60,<br>68, 69, 70, 71,<br>72, 73, 74, 75,<br>76, 77, 78, 79,<br>80, 81, 82, 83,<br>3, 4, 5, 6,<br>7, 8, 9, 10,<br>11, 12, 13, 14,<br>15, 16, 17, 18 | Input/Output Pins - These are the general purpose I/O pins used by the logic array.   |
| IN 4 - IN 7   | 67, 84, 2, 19  | Dedicated input pins to the device.   |
| $\overline{\text{ispEN}}$   | 23   | Input —Dedicated in-system programming enable input pin. This pin is brought low to enable the programming mode. The MODE, SDI, SDO and SCLK options become active.   |
| SDI/IN 0 <sup>1</sup>   | 25   | Input —This pin performs two functions. It is a dedicated input pin when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as an input pin to load programming data into the device. SDI/IN 0 also is used as one of the two control pins for the isp state machine. |
| MODE/IN 1 <sup>1</sup>  | 42   | Input —This pin performs two functions. It is a dedicated input pin when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as a pin to control the operation of the isp state machine.   |
| SDO/IN 2 <sup>1</sup>   | 44   | Input/Output —This pin performs two functions. It is a dedicated input pin when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as an output pin to read serial shift register data.   |
| SCLK/IN 3 <sup>1</sup>  | 61   | Input —This pin performs two functions. It is a dedicated input when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as a clock pin for the Serial Shift Register.   |
| $\overline{\text{RESET}}$   | 24   | Active Low (0) Reset pin which resets all of the GLB and I/O registers in the device.   |
| Y0  | 20   | Dedicated Clock input. This clock input is connected to one of the clock inputs of all of the GLBs on the device.   |
| Y1  | 66   | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any GLB on the device.  |
| Y2  | 63   | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any GLB and/or any I/O cell on the device.  |
| Y3  | 62   | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any I/O cell on the device.   |
| GND<br>VCC  | 1, 22, 43, 64<br>21, 65  | Ground (GND)<br>V <sub>CC</sub>   |

1. Pins have dual function capability

Pin Description

| Name  | TQFP Pin Numbers   | Description   |
|---|--|---|
| I/O 0 - I/O 3<br>I/O 4 - I/O 7<br>I/O 8 - I/O 11<br>I/O 12 - I/O 15<br>I/O 16 - I/O 19<br>I/O 20 - I/O 23<br>I/O 24 - I/O 27<br>I/O 28 - I/O 31<br>I/O 32 - I/O 35<br>I/O 36 - I/O 39<br>I/O 40 - I/O 43<br>I/O 44 - I/O 47<br>I/O 48 - I/O 51<br>I/O 52 - I/O 55<br>I/O 56 - I/O 59<br>I/O 60 - I/O 63 | 17, 18, 19, 20,<br>21, 22, 23, 28,<br>29, 30, 31, 32,<br>33, 34, 35, 36,<br>40, 41, 42, 43,<br>44, 45, 46, 47,<br>48, 53, 54, 55,<br>56, 57, 58, 59,<br>67, 68, 69, 70,<br>71, 72, 73, 78,<br>79, 80, 81, 82,<br>83, 84, 85, 86,<br>90, 91, 92, 93,<br>94, 95, 96, 97,<br>98, 3, 4, 5,<br>6, 7, 8, 9 | Input/Output Pins - These are the general purpose I/O pins used by the logic array.   |
| IN 4 - IN 7   | 66, 87, 89, 10   | Dedicated input pins to the device.   |
| ispEN   | 14   | Input —Dedicated in-system programming enable input pin. This pin is brought low to enable the programming mode. The MODE, SDI, SDO and SCLK options become active.   |
| SDI/IN 0 <sup>1</sup>   | 16   | Input —This pin performs two functions. It is a dedicated input pin when ispEN is logic high. When ispEN is logic low, it functions as an input pin to load programming data into the device. SDI/IN 0 also is used as one of the two control pins for the isp state machine. |
| MODE/IN 1 <sup>1</sup>  | 37   | Input —This pin performs two functions. It is a dedicated input pin when ispEN is logic high. When ispEN is logic low, it functions as a pin to control the operation of the isp state machine.   |
| SDO/IN 2 <sup>1</sup>   | 39   | Input/Output —This pin performs two functions. It is a dedicated input pin when ispEN is logic high. When ispEN is logic low, it functions as an output pin to read serial shift register data.   |
| SCLK/IN 3 <sup>1</sup>  | 60   | Input —This pin performs two functions. It is a dedicated input when ispEN is logic high. When ispEN is logic low, it functions as a clock pin for the Serial Shift Register.   |
| NC <sup>2</sup>   | 1, 2, 24, 25,<br>26, 27, 49, 50,<br>51, 52, 74, 75,<br>76, 77, 99, 100   | No Connect  |
| RESET   | 15   | Active Low (0) Reset pin which resets all of the GLB and I/O registers in the device.   |
| Y0  | 11   | Dedicated Clock input. This clock input is connected to one of the clock inputs of all of the GLBs on the device.   |
| Y1  | 65   | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any GLB on the device.  |
| Y2  | 62   | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any GLB and/or any I/O cell on the device.  |
| Y3  | 61   | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any I/O cell on the device.   |
| GND   | 13, 38, 63, 88   | Ground (GND)  |
| VCC   | 12, 64   | V <sub>cc</sub>   |

1. Pins have dual function capability  
2. NC pins are not to be connected to any active signals, Vcc or GND.

Pin Description


| Name  | CPGA Pin Numbers   | Description  |
|---|--|--|
| I/O 0 - I/O 3<br>I/O 4 - I/O 7<br>I/O 8 - I/O 11<br>I/O 12 - I/O 15<br>I/O 16 - I/O 19<br>I/O 20 - I/O 23<br>I/O 24 - I/O 27<br>I/O 28 - I/O 31<br>I/O 32 - I/O 35<br>I/O 36 - I/O 39<br>I/O 40 - I/O 43<br>I/O 44 - I/O 47<br>I/O 48 - I/O 51<br>I/O 52 - I/O 55<br>I/O 56 - I/O 59<br>I/O 60 - I/O 63 | F1, H1, H2, J1,<br>K1, J2, L1, K2,<br>K3, L2, L3, K4,<br>L4, J5, K5, L5,<br>L7, K7, L6, L8,<br>K8, L9, L10, K9,<br>L11, K10, J10, K11,<br>J11, H10, H11, F10,<br>E9, D11, D10, C11,<br>B11, C10, A11, B10,<br>B9, A10, A9, B8,<br>A8, B6, B7, A7,<br>A5, B5, C5, A4,<br>B4, A3, A2, B3,<br>A1, B2, C2, B1,<br>C1, D2, D1, E3 | Input/Output Pins - These are the general purpose I/O pins used by the logic array.  |
| IN 4 - IN 7   | E10, C7, A6, E2  | Dedicated input pins to the device.  |
| $\overline{\text{ispEN}}$   | G3   | Input – Dedicated in-system programming enable input pin. This pin is brought low to enable the programming mode. The MODE, SDI, SDO and SCLK options become active.   |
| SDI/IN 0 <sup>1</sup>   | G2   | Input – This pin performs two functions. It is a dedicated input pin when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as an input pin to load programming data into the device. SDI/IN 0 also is used as one of the two control pins for the isp state machine. |
| MODE/IN 1 <sup>1</sup>  | K6   | Input – This pin performs two functions. It is a dedicated input pin when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as a pin to control the operation of the isp state machine.   |
| SDO/IN 2 <sup>1</sup>   | J7   | Input/Output – This pin performs two functions. It is a dedicated input pin when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as an output pin to read serial shift register data.   |
| SCLK/IN 3 <sup>1</sup>  | G10  | Input – This pin performs two functions. It is a dedicated input when $\overline{\text{ispEN}}$ is logic high. When $\overline{\text{ispEN}}$ is logic low, it functions as a clock pin for the Serial Shift Register.   |
| $\overline{\text{RESET}}$   | G1   | Active Low (0) Reset pin which resets all of the GLB and I/O registers in the device.  |
| Y0  | E1   | Dedicated Clock input. This clock input is connected to one of the clock inputs of all of the GLBs on the device.  |
| Y1  | E11  | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any GLB on the device.   |
| Y2  | G9   | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any GLB and/or any I/O cell on the device.   |
| Y3  | G11  | Dedicated Clock input. This clock input is brought into the clock distribution network, and can optionally be routed to any I/O cell on the device.  |
| NC <sup>2</sup>   | G3   | No Connect   |
| GND<br>V <sub>CC</sub>  | C6, F3, F9, J6<br>F2, F11  | Ground (GND)<br>V <sub>CC</sub>  |

1. Pins have dual function capability.

2. NC pins are not to be connected to any active signals, V<sub>cc</sub> or GND.

Pin Configuration

ispLSI 1032 84-Pin PLCC Pinout Diagram

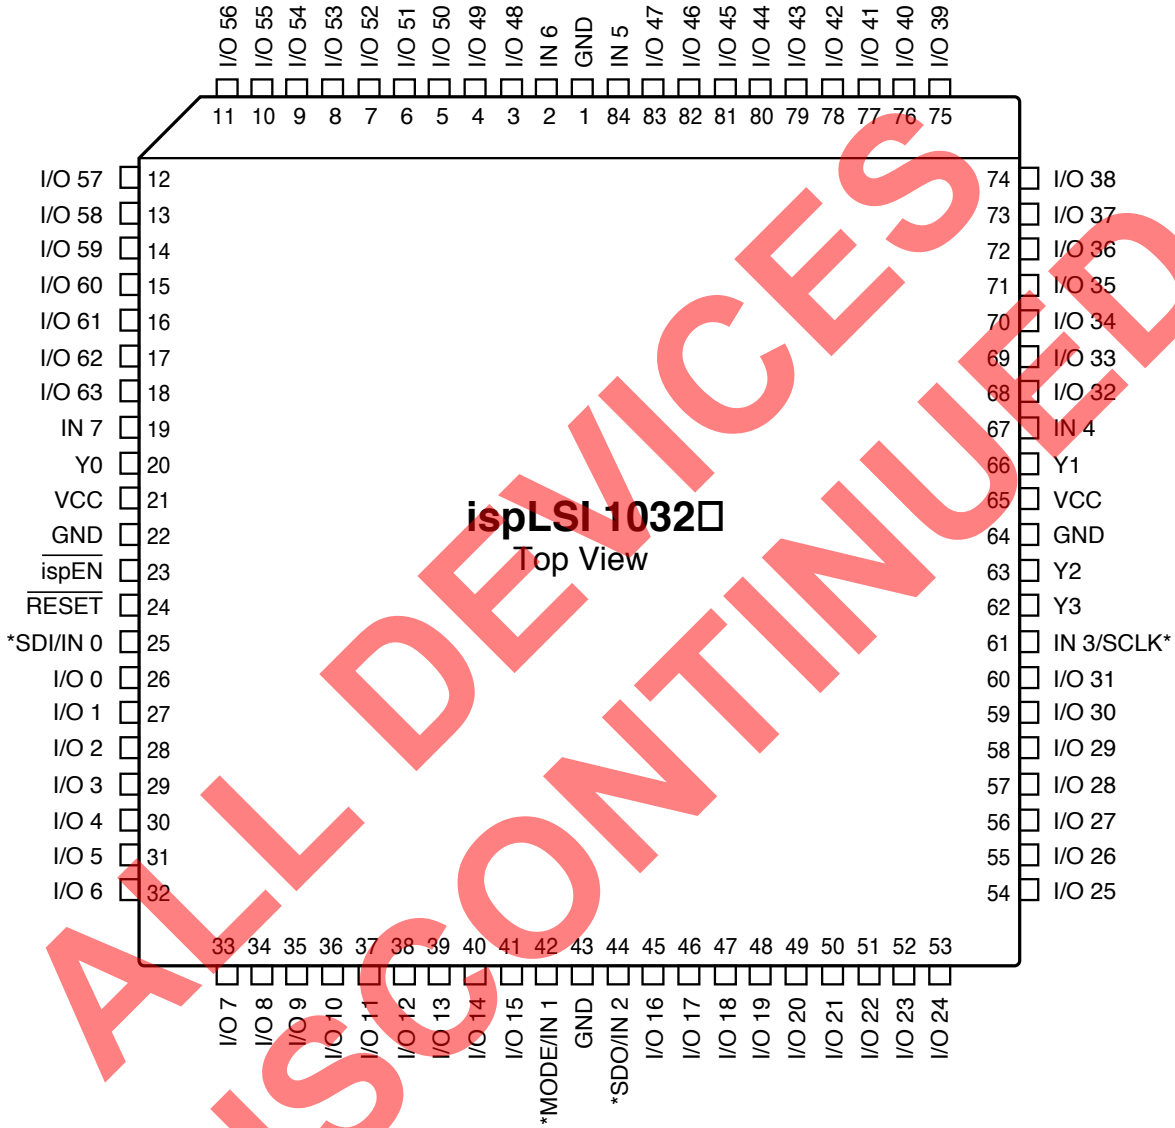


\*Pins have dual function capability.

0123-32-isp

Pin Configuration

ispLSI 1032 100-pin TQFP Pinout Diagram

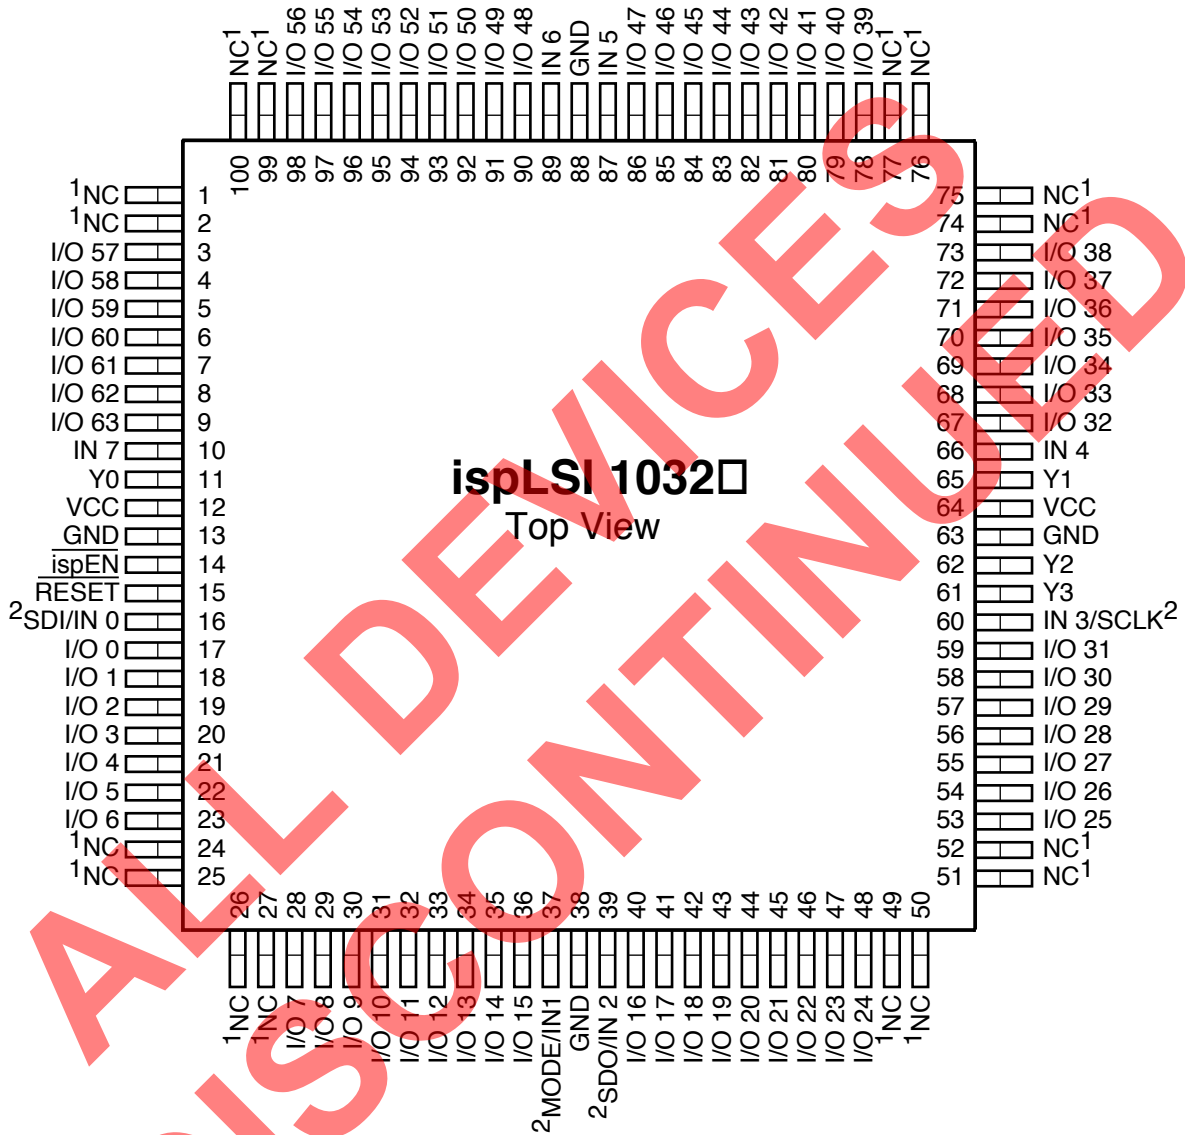


1. NC pins are not to be connected to any active signal, Vcc or GND.
2. Pins have dual function capability.

0766A-32-isp

Pin Configuration

ispLSI 1032/883 84-Pin CPGA Pinout Diagram

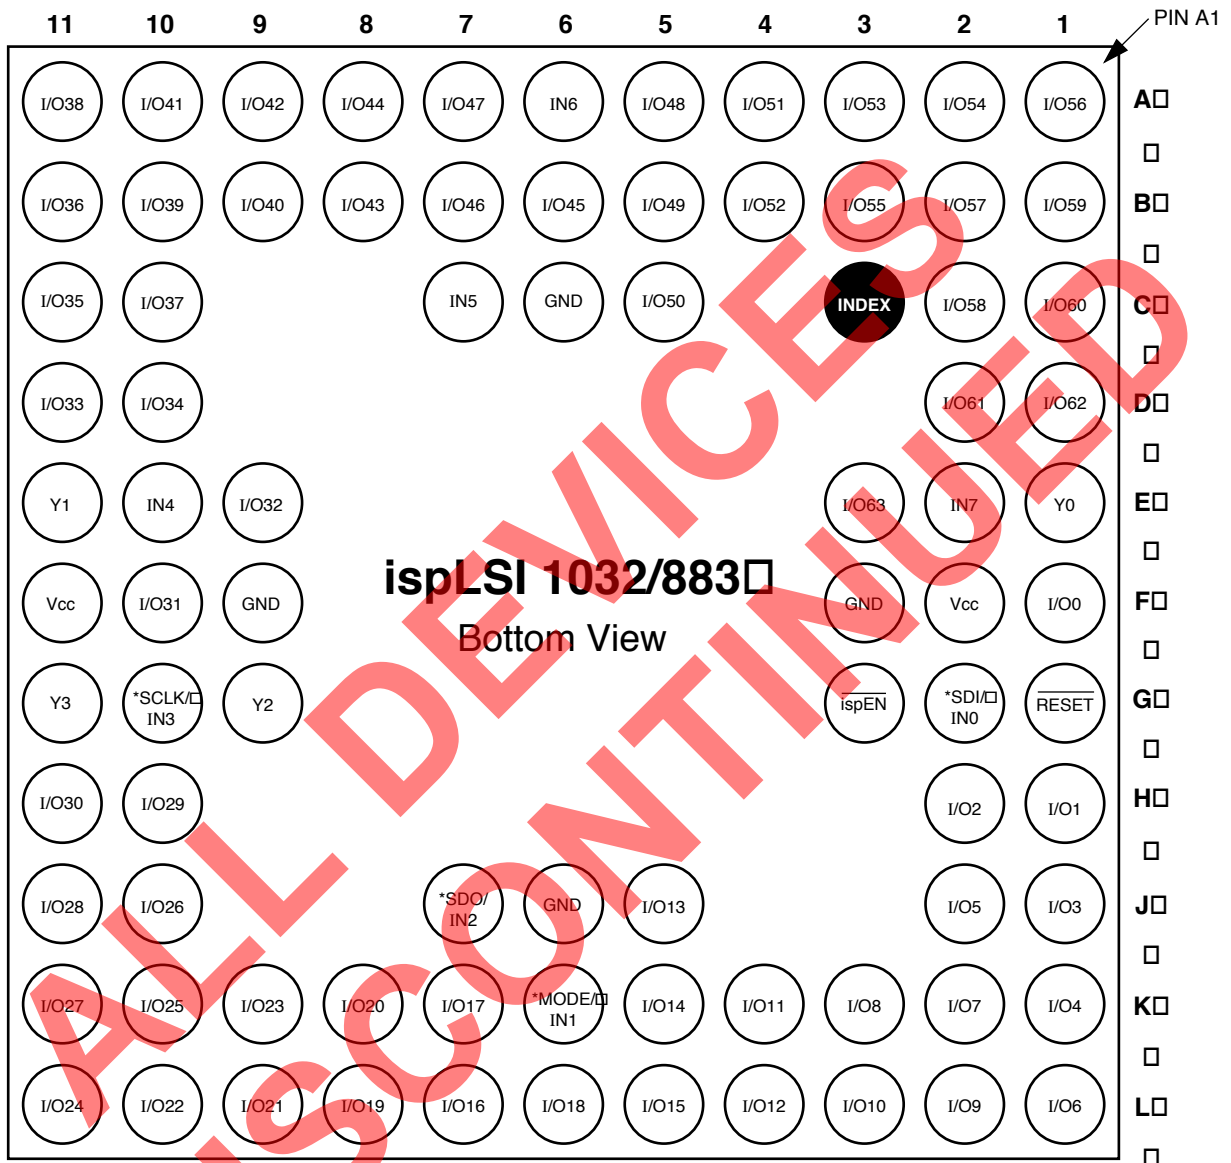


\*Pins have dual function capability.

0488A-32-isp/883



## Part Number Description

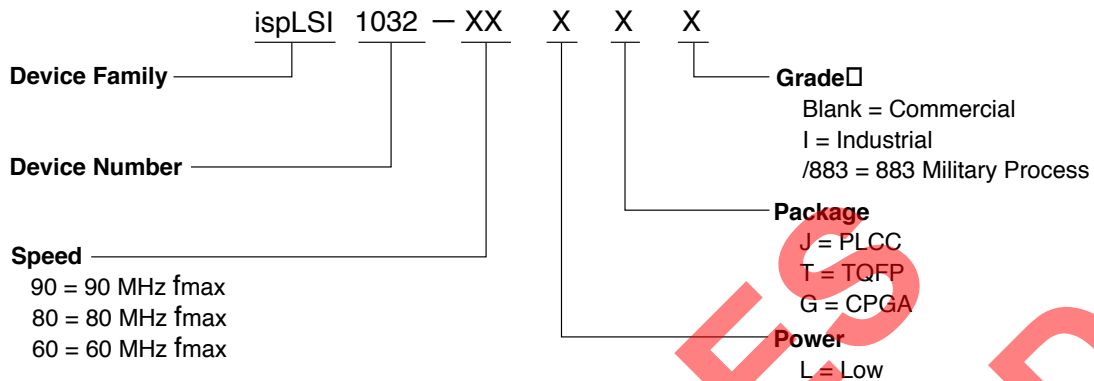

0212-80B-isp1032

## Ordering Information

### COMMERCIAL

| Family | $f_{max}$ (MHz) | $t_{pd}$ (ns) | Ordering Number  | Package      |
|--------|-----------------|---------------|------------------|--------------|
| ispLSI | 90              | 12            | ispLSI 1032-90LJ | 84-Pin PLCC  |
|        | 90              | 12            | ispLSI 1032-90LT | 100-Pin TQFP |
|        | 80              | 15            | ispLSI 1032-80LJ | 84-Pin PLCC  |
|        | 80              | 15            | ispLSI 1032-80LT | 100-Pin TQFP |
|        | 60              | 20            | ispLSI 1032-60LJ | 84-Pin PLCC  |
|        | 60              | 20            | ispLSI 1032-60LT | 100-Pin TQFP |

### INDUSTRIAL

| Family | $f_{max}$ (MHz) | $t_{pd}$ (ns) | Ordering Number   | Package      |
|--------|-----------------|---------------|-------------------|--------------|
| ispLSI | 60              | 20            | ispLSI 1032-60LJI | 84-Pin PLCC  |
|        | 60              | 20            | ispLSI 1032-60LTI | 100-Pin TQFP |

### MILITARY/883

| Family | $f_{max}$ (MHz) | $t_{pd}$ (ns) | Ordering Number      | SMD Number      | Package     |
|--------|-----------------|---------------|----------------------|-----------------|-------------|
| ispLSI | 60              | 20            | ispLSI 1032-60LG/883 | 5962-9308501MXC | 84-Pin CPGA |

**Note:** Lattice Semiconductor recognizes the trend in military device procurement towards using SMD compliant devices, as such, ordering by this number is recommended.

Table 2- 0041A-32-isp