
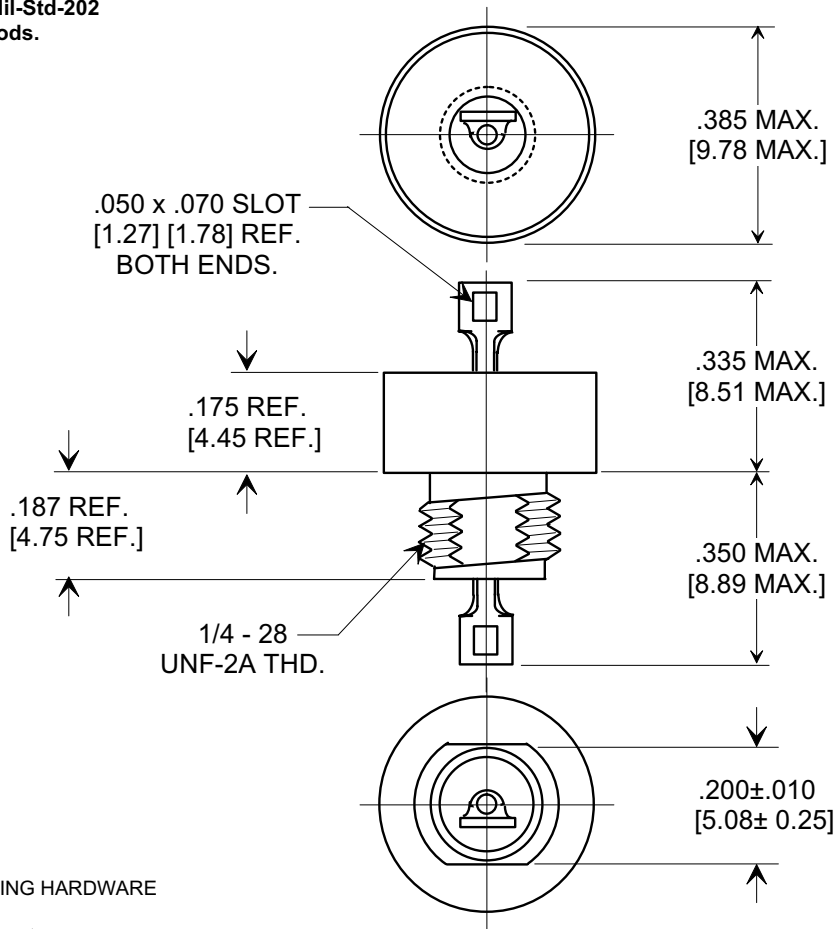





# MARKETING SALES DRAWING

**DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING**  
**DIMENSIONS IN METRIC - [ ]**

Electrical Testing  
 per Tusonix standard  
 test plans and Mil-Std-202  
 Test Methods.



**MOUNTING HARDWARE**

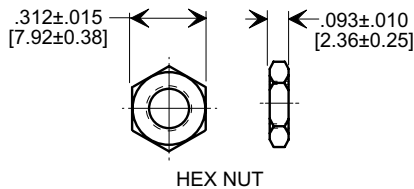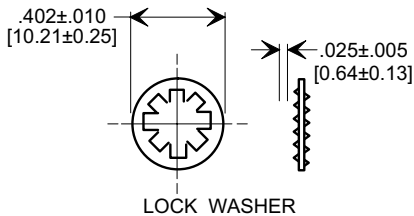

**NOTES:**

- TUSONIX STANDARD PART NUMBER: 4601-059.  
 TUSONIX RoHS COMPLIANT PART NUMBER: 4601-059 LF.  
 CUSTOMER MUST SPECIFY STANDARD OR RoHS PART NUMBER WHEN ORDERING.
- MATERIALS: BUSHING - TIN PLATED STEEL.  
 TOP SEAL FINISH: STANDARD PART #: 60/40 SOLDER PLATED.  
 RoHS PART #: MATTE TIN PLATED.  
 LEAD STANDARD PART: SILVER PLATED COPPER.  
 NUT - TIN PLATED BRASS.  
 L"WASHER - TIN PLATED PHOSPHOR BRONZE.
- PART MARKING: TRADEMARK AND VARIATION NUMBER.  
 STANDARD PART: BLACK INK. RoHS PART: GREEN INK.
- MOUNTING TORQUE: 8 lb - ins. max.
- SEAL TESTED PER MIL-STD-202 METHOD 112 CONDITION A.
- DCR - .01 Ω max.
- MAX. SOLDER TEMPERATURE 500°F.

MIN. CAP. (μF)	I.R. MIN. @ 100 (VDC.)	DWV (VDC)	WORKING VOLTAGE DC		CURRENT D.C.	MINIMUM NO LOAD INSERTION LOSS (dB) AT 25°C PER MIL-STD-220					
			85°C	125°C		30 KHz	100 KHz	300 KHz	1 MHz	10 MHz	1 GHz
.15	1 G Ω	500	280	200 VDC 125 VAC 0-400 Hz	15 A	----	7	15	25	40	60

X-2015 Rev-0	<b>REVISION RECORD</b>						--TOLERANCES-- Unless Otherwise Specified	Title <b>COAXIAL BROADBAND - "L" HERMETICALLY SEALED</b>			
	0	Original Release C.O.	1	REISSUE 930129-1	2	940512-2		DECIMAL ± // //	Drawn S.M. 03-06-03		Scale X 3
	1	TYPO CORRECTED. E.C. 03-04-93	2	-059 ADDED E.C. 5-20-94	3	970205-2	ANGLES ± // //	Approved T.C. 03-06-03		A 4601-059	
	2	-061 ADDED E.C. 2-13-97 COLUMNS C&D ADDED.	3	-061 ADDED 0-400 Hz TO 125° C. S.M. 12-17-97	4	19971212-5-01	<b>TUSONIX</b> TUCSON, ARIZONA				
	3	RDN TO COMP FMP. STYLE DWG SPLIT FOR EACH VAR. S.M. 03-06-03	4	20030304-2-17	5	REVISED AND ADDED NOTES. S.M. 10-10-05					
	4	20051007-7-02									
5											